



**WARNING: RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY. FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL SPECIFICATIONS. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING. RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.**



**Individual / BOR Frame Installation:**

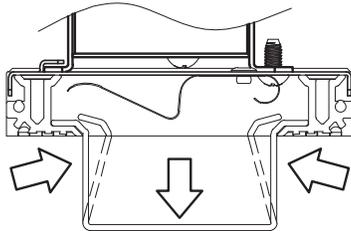

1. Remove Spackle Cover


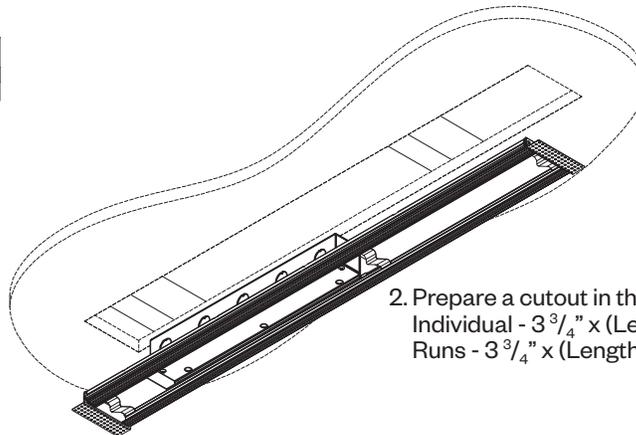


2. Prepare a cutout in the ceiling:  
Individual -  $3\frac{3}{4}$ " x (Length of fixture +  $\frac{1}{2}$ " )  
Runs -  $3\frac{3}{4}$ " x (Length of fixture +  $1\frac{1}{2}$ " )

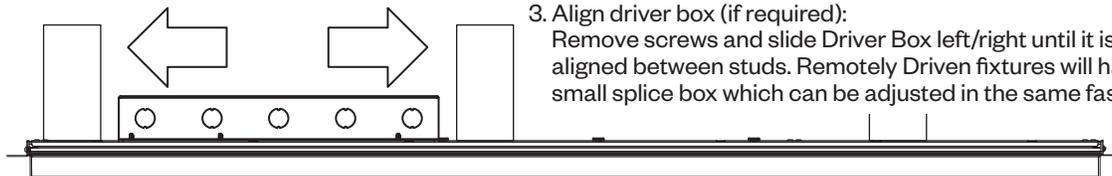
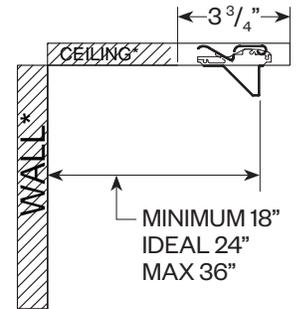


3. Align driver box (if required):  
Remove screws and slide Driver Box left/right until it is aligned between studs. Remotely Driven fixtures will have a small splice box which can be adjusted in the same fashion.


4. When box is aligned:

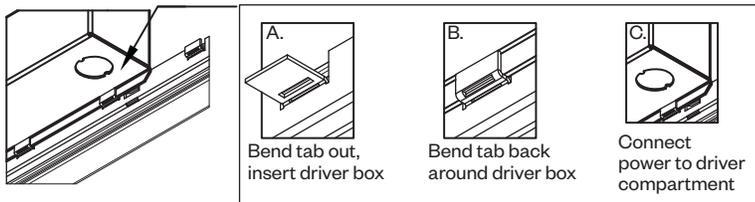


\* When mounting, interior spring must face wall as shown

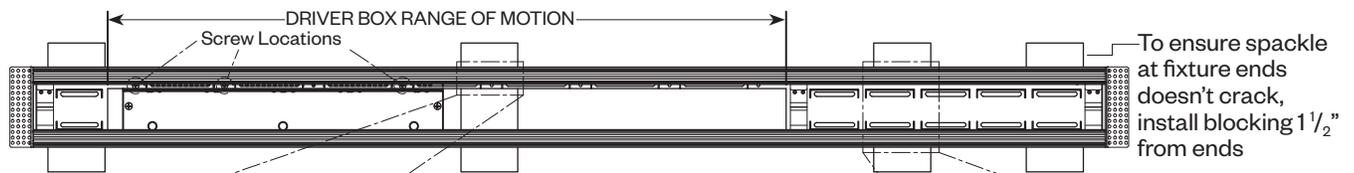


5. Mount Fixture\*: Secure fixture to structure (studs/joists) via provided slots. If fixture does not intersect any structure, blocking must be added (by others).

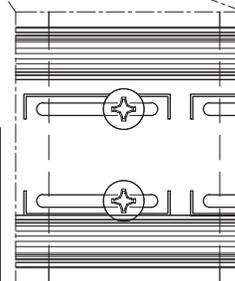

**Finishing Instructions:**

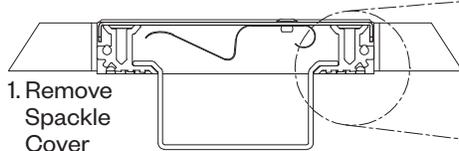



1. Remove Spackle Cover



2. Feather spackle out from spackle cover.


**Continuous Run (MOR / EOR) Installation:**

Install BOR: Follow steps 1-5 from page one

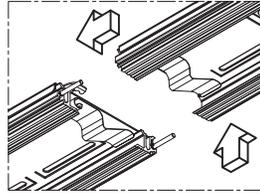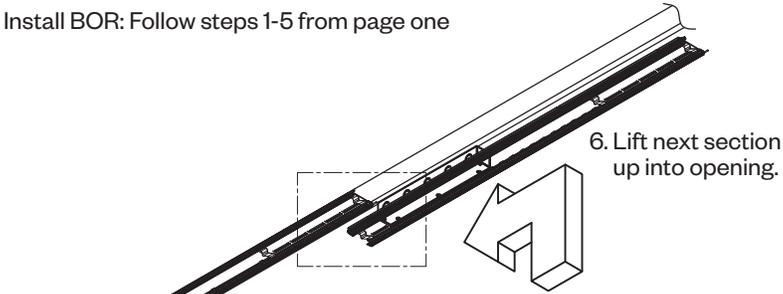


7. Slide section toward already installed fixture ensuring alignment pins insert into appropriate hole.

8. Bring power down the run by daisy chaining sections together (or bring in individual feeds to each section).

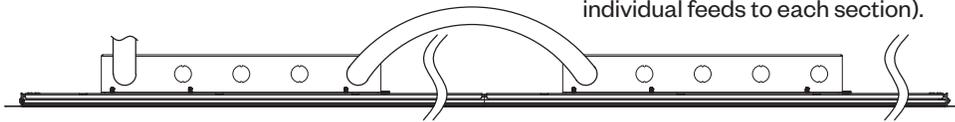

Once full run is installed, refer back to "Finishing Instructions"

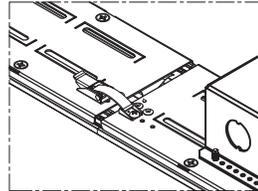


**OPTIONAL**

9. If ceiling is not yet installed, secure sections together via catch/latch.

*(If catch/latch are obstructing installation, they can be removed & discarded)*


**Reflector Installation:**

1. Remove Driver box cover via (2) screws.

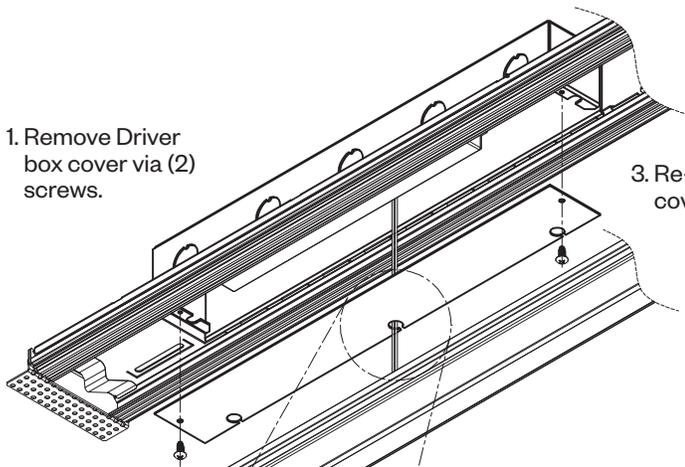


3. Re-attach driver cover.

2. Connect reflector leads to driver output leads behind driver cover.




4. Install Reflector

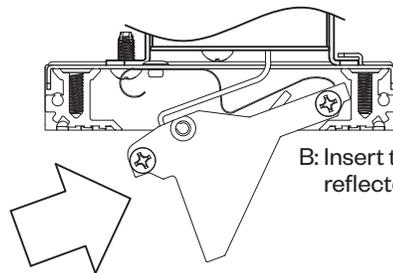

A: Feed excess wiring into driver box.

B: Insert thin portion of reflector first.

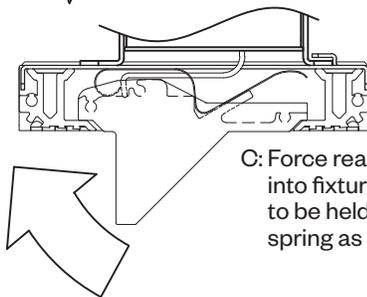

C: Force rear of reflector into fixture. Reflector to be held in place by spring as shown.