

CURRENT LIMITING DEVICE

GLOBAL TRACK 2 CIRCUIT/2 NEUTRAL, 120V

ACL-TEK
2C/2N, 120V

APPLICATION:

Limits the amount of electrical load placed on a run of 2 circuit/2 neutral track

MOUNTING:

Mounts directly to a 4" octagonal box
Compatible with Global TEK 2 circuit/2 neutral track

CONSTRUCTION:

Cover:

Molded UL approved polycarbonate, color-matched to track components

Mounting Plate:

Stamped steel 16 ga. zinc plated
Integral track connector is keyed for polarity by order based on feed direction

Circuit Breaker:

Integrated rocker style circuit breaker features ON/OFF markings
Snap-in circuit breaker contains screw terminals for 12 ga. copper conductors


LABELING:

cUL listed



PROJECT:

TYPE:

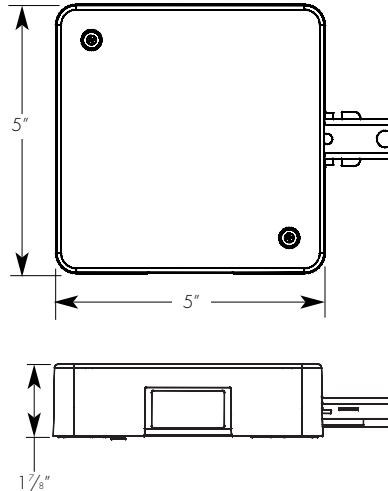

ELECTRICAL

120v 60hz capacity
Integral circuit breaker in a variety of amp ratings

1 amp/120 watts	Amerlux recommends loading to 80% of capacity to eliminate nuisance tripping
3 amps/360 watts	
5 amps/600 watts	
8 amps/960 watts	
10 amps/1200 watts	

ORDERING INFORMATION:

Model	Finish	Amp Rating Circuit Breaker 1	For use with ACL-GES-14 only (if required) Circuit Breaker 2
ACL-TEK11 (live end left feed)	1 - silver grey w/black circuit breaker	1	1
	2 - black w/black circuit breaker	3	3
	3 - white w/white circuit breaker	5	5
ACL-TEK12 (live end right feed)		8	8
		10	10



Example: ACL-TEK11-3-5

Cat #: