


WARNING - RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY. FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL SPECIFICATIONS. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.

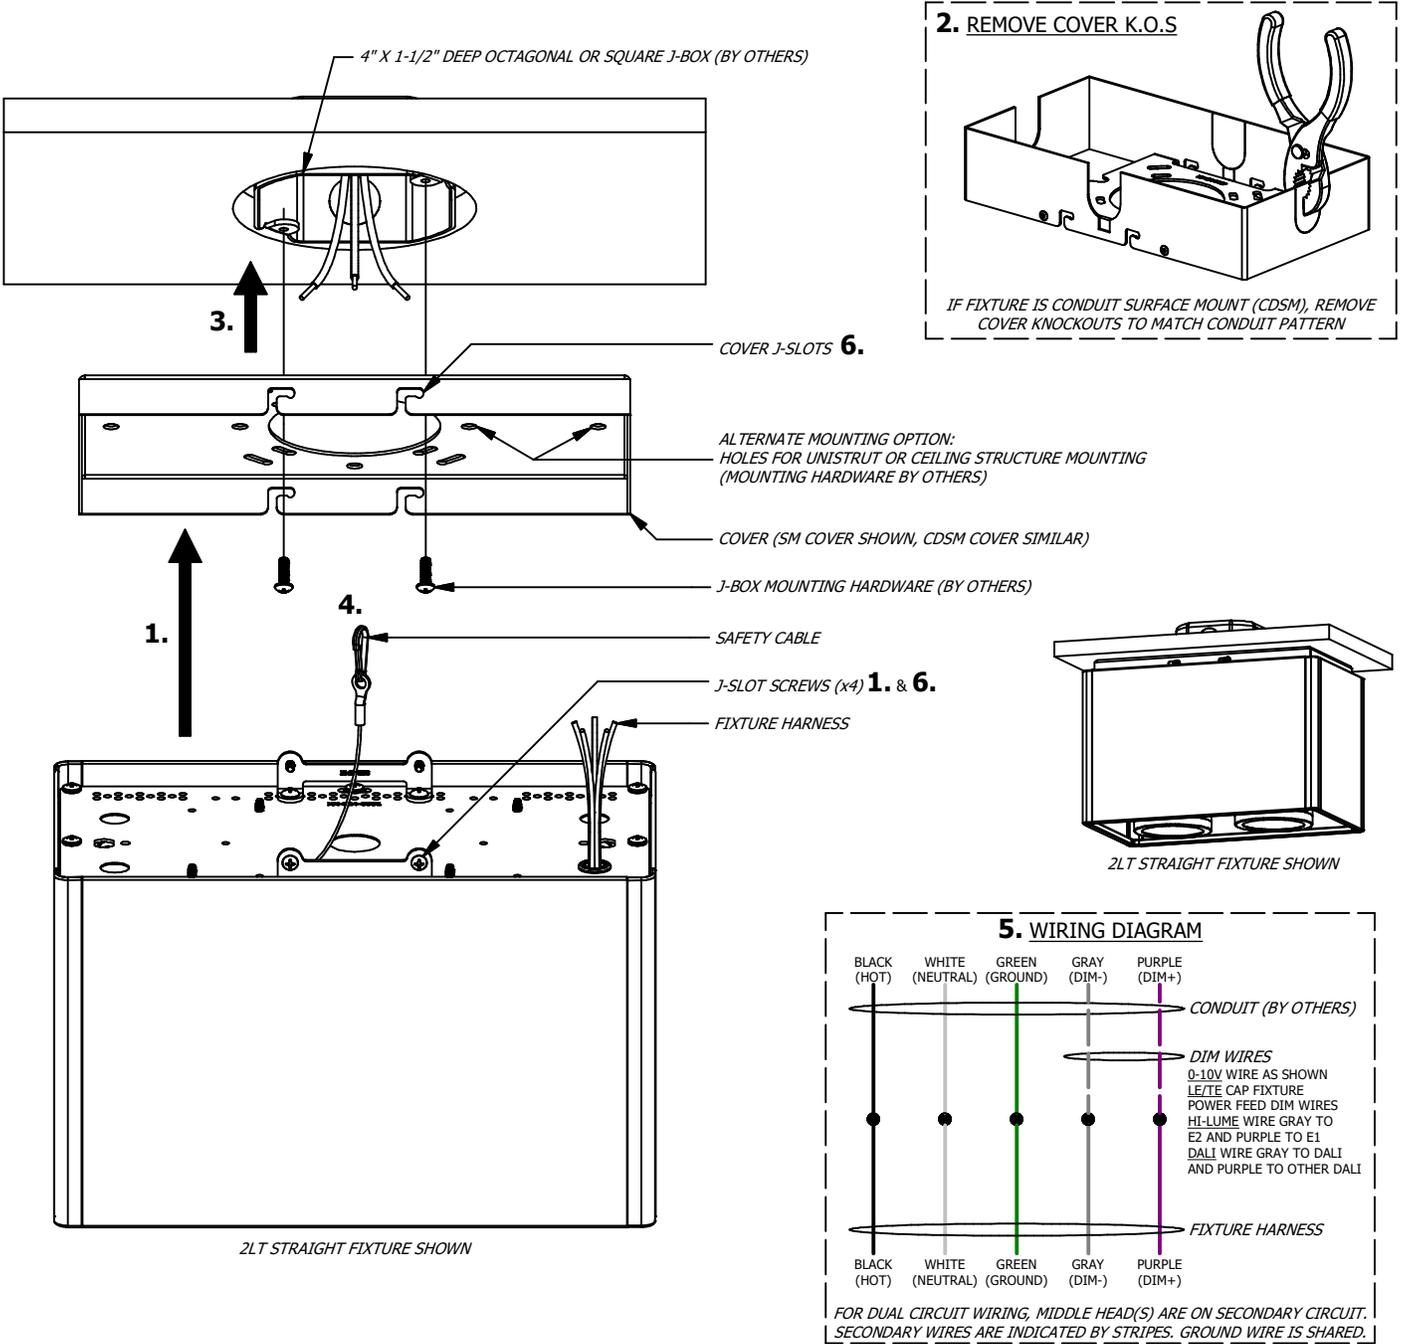

1. LOOSEN J-SLOT SCREWS & REMOVE COVER, 2. REMOVE COVER K.O.S (IF NECESSARY), 3. MOUNT COVER, 4. ATTACH FIXTURE SAFETY CABLE TO COVER SLOT, 5. WIRE ACCORDING TO LOCAL AND NATIONAL CODE, 6. LOCATE J-SLOT SCREWS IN COVER J-SLOTS, THEN FULLY TIGHTEN SCREWS.

Amerlux, 178 Bauer Drive, Oakland, N.J. 07436, T: 973-882-5010, F: 973-882-2604 www.amerlux.com