

ACION WALL MOUNTED LED LUMINAIRE

U.1.9.17

The Amerlux Acion luminaire employs solid state technology and precision engineering to provide small scale LED solutions in landscape and architecture layouts. All components are encapsulated inside a single attractive enclosure designed for superior performance in weather resistant applications. Offered in a choice of beam spreads, finishes, and color temperatures, and glare shield are also available.

CONSTRUCTION:

- IP67 sealed optical chamber and integral driver chamber
- Easy "two-screw" integral driver access, does not disturb optical chamber seal
- Flush lens prevents puddles/water deposits in upward facing applications
- Knuckle mount
- Vertical aiming lock, with tamper-resistant tooled locking after final aiming

OPTICS:

- Lumen maintenance: 70% @ 50,000 hours
- 10°, 15°, 30°, 40°, 60°, 60x10, 60x30, 90x60 beam spreads are available with secondary shaping lens
- **HGS** - Half external glare-shield field installable

ELECTRICAL:


Integral driver
Input voltage 120v-277v auto-sensing
1/2" NPSM wire entry
Drive current 700mA
Power consumption 10W
ELV dimmable at 120v only

FINISH:

Premium quality thermoset polyester powdercoat for a durable finish in the following:


- BLK** -Satin Black **TBK** -Textured Black
CLB -Classic Bronze **WHT** -White
GRN -Green **CSTM** -Custom

2WMACCS
LED

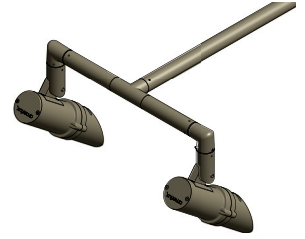

PROJECT:

TYPE:

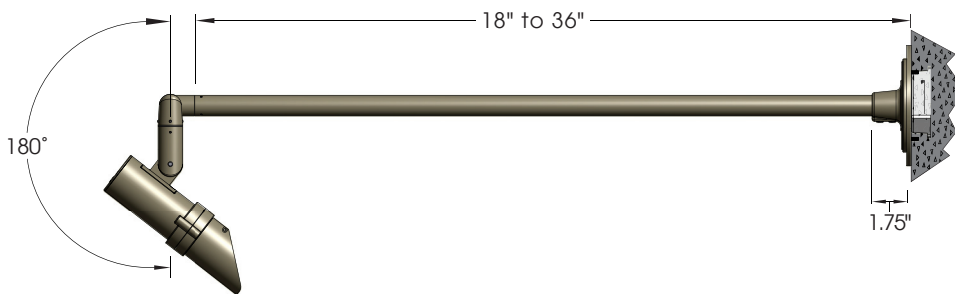

Model	CCT	Beam Spread	Approx. Lumens	Total Efficacy	Mounting	Finish	Accessories	Arm Length	
2WMACCS	27 (2,700K) 30 (3,000K) 35 (3,500K)	Symmetric Pattern	10 (10°)	1260-1420	63-71 lm/W	K (Knuckle)	BLK CLB GRN TBK WHT	HGS Glare Shield	18" 24" 36"
			15 (15°)	1200-1360	60-68 lm/W				
			30 (30°)	1140-1300	57-65 lm/W				
			40 (40°)	1140-1300	57-65 lm/W				
			60 (60°)	1080-1240	54-62 lm/W				
		Horizontal Pattern	H6010 (60x10)	1260-1140	63-57 lm/W				
	H6030 (60x30)		1140-1180	57-59 lm/W					
	H9060 (90x60)		1160-1220	58-61 lm/W					
	Vertical Pattern	V6010 (60x10)	1260-1140	63-57 lm/W					
		V6030 (60x30)	1140-1180	57-59 lm/W					
		V9060 (90x60)	1160-1220	58-61 lm/W					

Ordering options in **BOLD**



5 year limited warranty
AMERLUX LED



Part String

Example: **2WMACCS/30/K/BLK/36"**