

Lunetta

LED Walkway Bollard



LUN10-18/30/SDS



Features


LED integration throughout the site is possible with Amerlux's Lunetta bollard, which includes a highly efficient and long lasting LED array. A straight round 2.5" aluminum pole emanates from the ground and begins to flare until gracefully reaching the recessed light source running around the perimeter. The Lunetta bollard has no visible fasteners or hardware, which adds to its sleek design.

Product Overview

Wattage:	16W
Lumen Output:	1,420 lm (4,000K)
Color Temp:	2,700K / 3,000K / 3,500K / 4,000K
Dimming:	0-10v
Weight at 24in:	6 lbs
Max Height:	42 inches
Diameter:	10 inches

PROJECT:

TYPE:

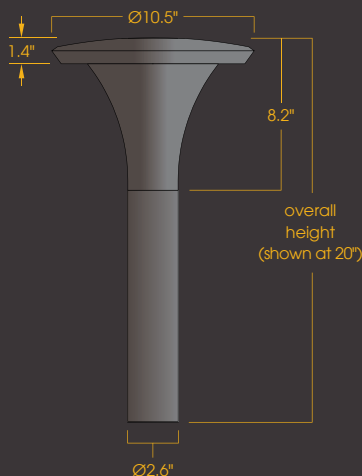

Description:

Lighting for exterior retail and hospitality environment, university and corporate campuses, or any outdoor meeting space.

LED Array:

(40) High brightness SMD LEDs delivering approximately 1,430 lm. Sealed under polycarbonate optical lens, resistant to UV and thermal shock. It runs at approximately 16W.

LED Driver Module:

- Electronic driver operates at 550mA with 120v-277V AC input
- 0-10v dimming

Materials:

Anchor base - Cast aluminum (356-T6)
 Shaft - Extruded aluminum (6063-T6)
 Cone - Spun aluminum (6063)

ETL listed, suitable for wet locations.

Finish:

Premium quality thermoset polyester powdercoat for a durable finish.

ANT - Anthracite Gray

CLB - Classic Bronze

WHT - White

BLK - Satin Black

SDS - Stardust Silver

Custom _____



Lunetta


LED Walkway Bollard



PROJECT:


TYPE:

Performance

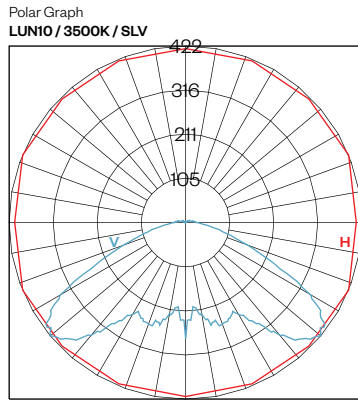


Maximum Candela = 421.68
 Located At Horizontal Angle = 22.5
 Vertical Angle = 50
 H - Horizontal Axial Candela
 V - Vertical Axial Candela
B1-U2-G1

Cutaway View

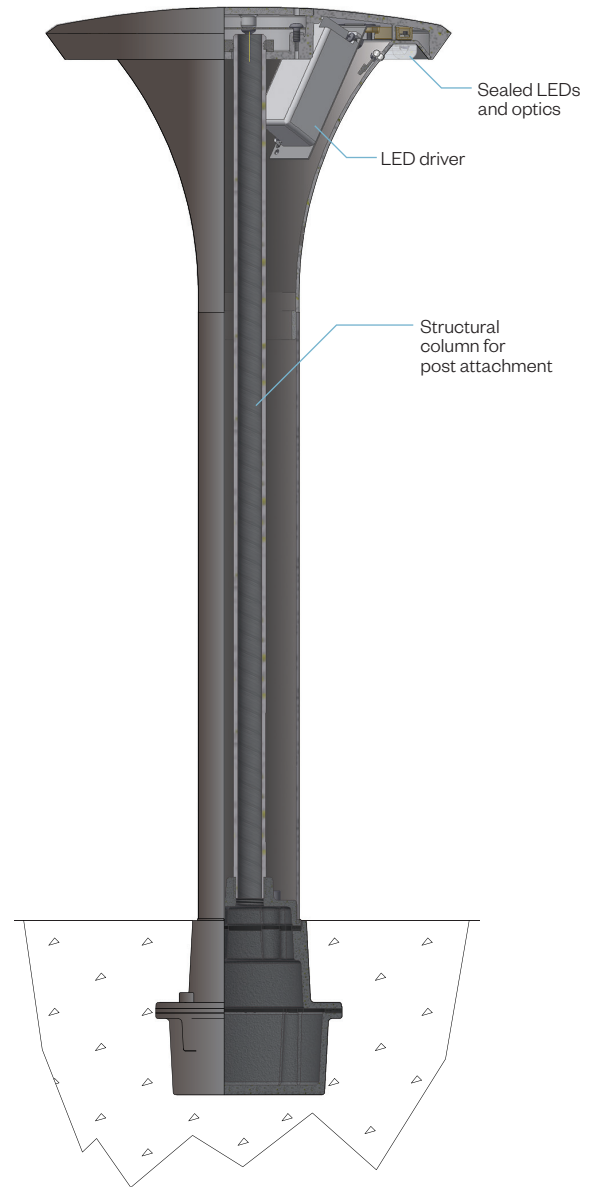

Anchorage Details

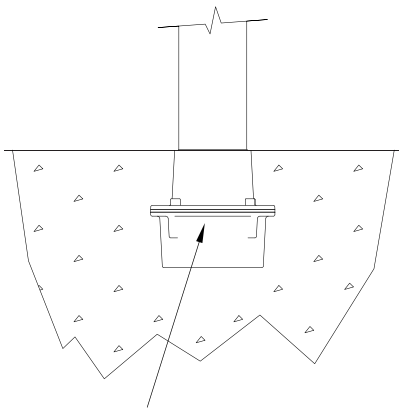

Subterranean, thick-walled sand cast aluminum junction box with two, 1/2" NPT threaded conduit openings in bottom standard, with access for wiring and inspection

Ordering Information

Model	Overall Height	CCT	Approx. Lumens Delivered	Nominal Input Power	Finish
LUN10	18 (18")	27 (2,700K)	1,310 lm	16W	ANT, BLK CLB, SDS WHT CSTM _____
	24 (24")	30 (3,000K)	1,350 lm		
	30 (30")	35 (3,500K)	1,380 lm		
	36 (36")	40 (4,000K)	1,420 lm		
	42 (42")				

Ordering options in bold. Example: **LUN10-24/27/SDS**