

# Acion-LV

## Small Low Voltage LED Accent

ACCS-LV / BLK



### Features



The Amerlux Accent luminaire employs solid state technology and precision engineering to provide small scale LED solutions in landscape and architecture layouts. All components are encapsulated inside a single attractive enclosure designed for superior performance in all-weather applications. Offered in a choice of beam spreads, finishes, and color temperatures, several mounting options and a glare shield are also available.

### Product Overview

Wattage:	10W
Lumen Output:	655 lm
Color Temp:	2,700K / 3,000K / 3,500K

### PROJECT:

### TYPE:



### Construction:

- Die-cast aluminum
- IP66 sealed optical chamber and integral driver chamber
- Easy “two-screw” integral driver access, does not disturb optical chamber seal
- Flush lens prevents puddles/water deposits in upward facing applications
- 180° Knuckle mount
- Vertical aiming lock, with tamper-resistant tooled locking after final aiming

### Optics:

- Lumen maintenance: 70% @ 50,000 hours
- 10°, 15°, 30°, 40°, 60°, 60x10, 60x30, 90x60 beam spreads are available with secondary shaping lens

### Electrical:

- 12v AC input
- Integral driver capable of handling typical variances in a 12v system (9-15v)
- Drive current 700mA
- Power consumption 10W
- 1/2" NPSM wire entry
- 6ft leads included

### ETL listed, suitable for wet locations.

### Accessories:

- Ground Spike (**GSP2**)
- Ground Stake (**GSP17**)
- Junction Box (**JBOX**)
- Junction Mount (**JCOV**)

### Optical Accessory:

- Hexell Louver (**HCL**)
- Half Glare Shield (**HGS**)

### Finish:

Premium quality thermoset polyester powdercoat for a durable finish.

**BLK** -Satin Black  
**CLB** -Classic Bronze

**GRN** -Green  
**CSTM** -Custom



**5 year limited warranty**  
AMERLUX LED



# Acion


Small Low Voltage LED Accent




## PROJECT:

## TYPE:


### Accessories:

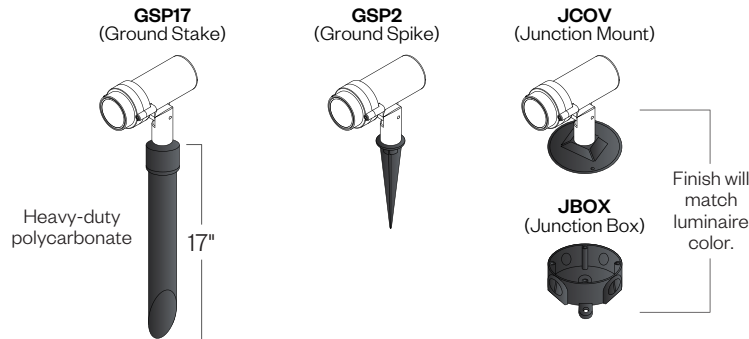

### Optical Accessories:

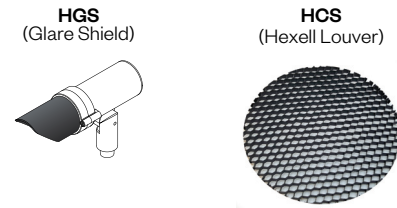

### Optical Performance:

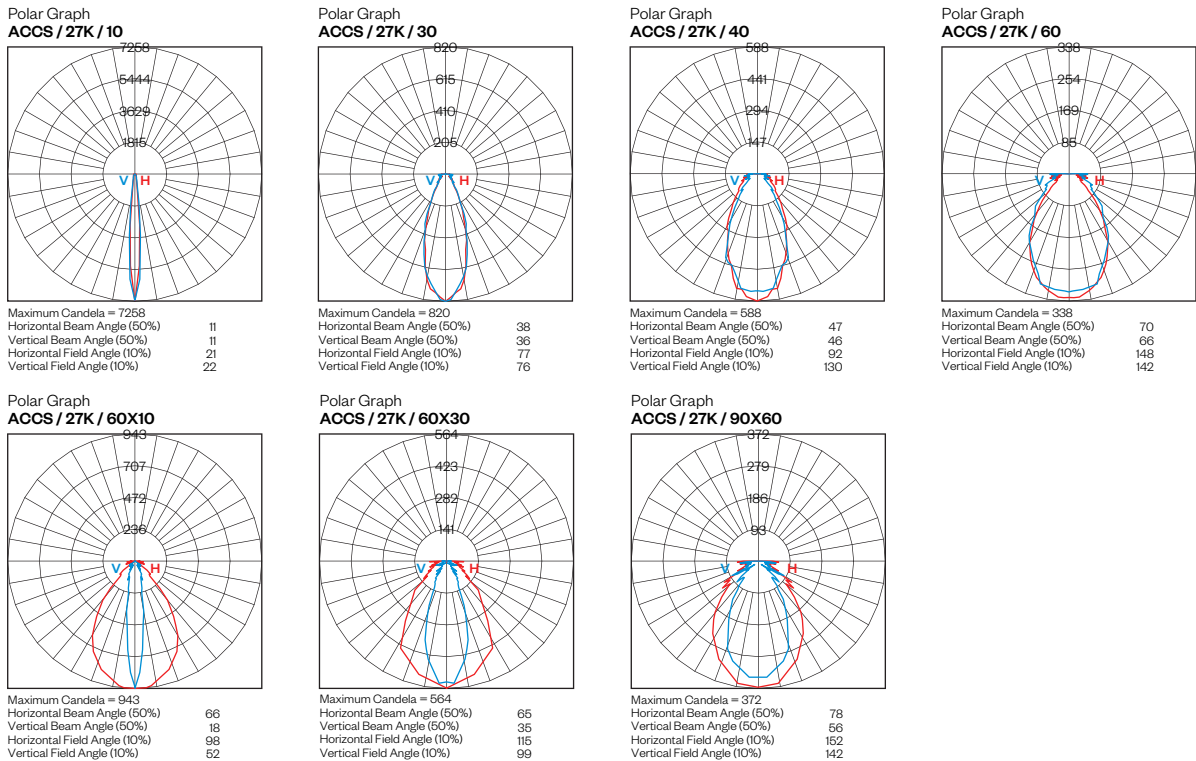

Data represents the use of light shaping filters  
Complete photometric data (ies format) available upon request

### Ordering Information

Model	CCT	Beam Spread	Approx. Lumens	Total Efficacy	Mounting	Finish	Accessories	Optical Accessories		
<b>ACCS-LV</b>	<b>27 (2,700K)</b> <b>30 (3,000K)</b> <b>35 (3,500K)</b>	Symmetric Pattern	<b>10 (10°)</b>	630-710	63-71 lm/W	K (Knuckle)	<b>BLK</b> <b>CLB</b> <b>GRN</b> <b>CSTM</b>	<b>GSP17</b> <b>GSP2</b> <b>JBOX</b> <b>JCOV</b>	<b>HCS</b> <b>HGS</b>	
			<b>15 (15°)</b>	600-680	60-68 lm/W					
			<b>30 (30°)</b>	570-650	57-65 lm/W					
			<b>40 (40°)</b>	570-650	57-65 lm/W					
			<b>60 (60°)</b>	540-620	54-62 lm/W					
		Horizontal Pattern	<b>H6010 (60x10)</b>	630-570	63-57 lm/W					
			<b>H6030 (60x30)</b>	570-590	57-59 lm/W					
			<b>H9060 (90x60)</b>	580-610	58-61 lm/W					
			Vertical Pattern	<b>V6010 (60x10)</b>	630-570					63-57 lm/W
				<b>V6030 (60x30)</b>	570-590					57-59 lm/W
<b>V9060 (90x60)</b>	580-610	58-61 lm/W								

Ordering options shown as **BOLD**. Example: **ACCS-LV/30/10/K/BLK**