

AP24 SERIES LUMINAIRE

U.7.8.16

AP24
HID

Description

Lighting for exterior retail, commercial and hospitality environments. The AP24 Series consists of a decorative acorn combined with one of several styles of cast aluminum fitters.

Electrical

- High power factor ballast (HPF), core and coil type, pre-wired and tested
- Easy ballast pod access
- 4KV pulse rated porcelain socket
- Suitable for wet location

ETL listed, suitable for wet locations.

Installation

The luminaire will mount to a 3" OD post or tenon with 5/16" black oxide coated stainless steel set screws to ensure a solid connection. The diffuser will be held to the fitter by (4) 1/4-20" black oxide coated stainless steel captive set screws.

Diffuser choices

- Clear Textured Polycarbonate (**PC-CL**)
- White Textured Polycarbonate (**PC-WH**)
- Clear Textured DR Acrylic (**DR-CL**)

Finish


Premium quality thermoset polyester powdercoat for a durable finish in the following:

- BLK** - Satin Black
CLB - Classic Bronze
GBZ - Gloss Textured Bronze
GRN - Green
- GTB** - Gloss Textured Black
TBK - Textured Black
TGR - Gloss Textured Green



PROJECT:

TYPE:

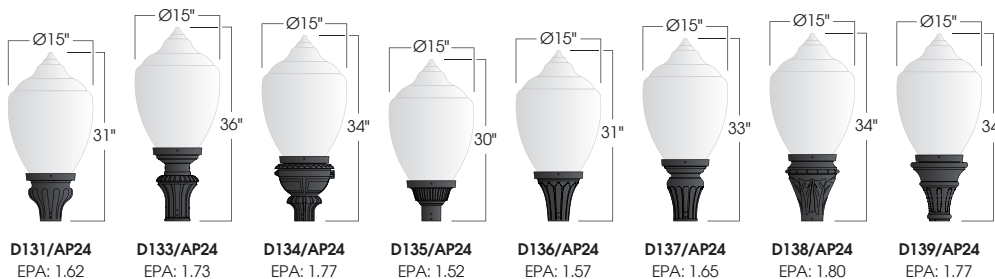

Ordering Information:

Model	Diffuser Material-Color	Optical Option	Light Source	Voltage	Finish	Accessory
D131/AP24 D133/AP24 D134/AP24 D135/AP24 D136/AP24 D137/AP24 D138/AP24 D139/AP24	PC-CL PC-WH DR-CL	L3 L5 LVR FDR	50MH,70MH 100MH,150MH 175MH-PS 250MH-PS 50HPS,70HPS 100HPS,150HPS 175HPS,250HPS	120v 208v 240v 277v	BLK CLB GBZ GRN GTB TBK TGR Custom	BB BB-FW CFIN HSS-90 HSS-180 PCL SR

See next page for more complete ordering options

Part String


Example: D131/AP24PC-CL/70MH/120v/BLK

800.364.0098 • Fax: 281.997.5441 • www.amerlux.com


Amerlux reserves the right to change details that do not affect overall function and performance.




Assembly Details
(Example: D136/AP24)

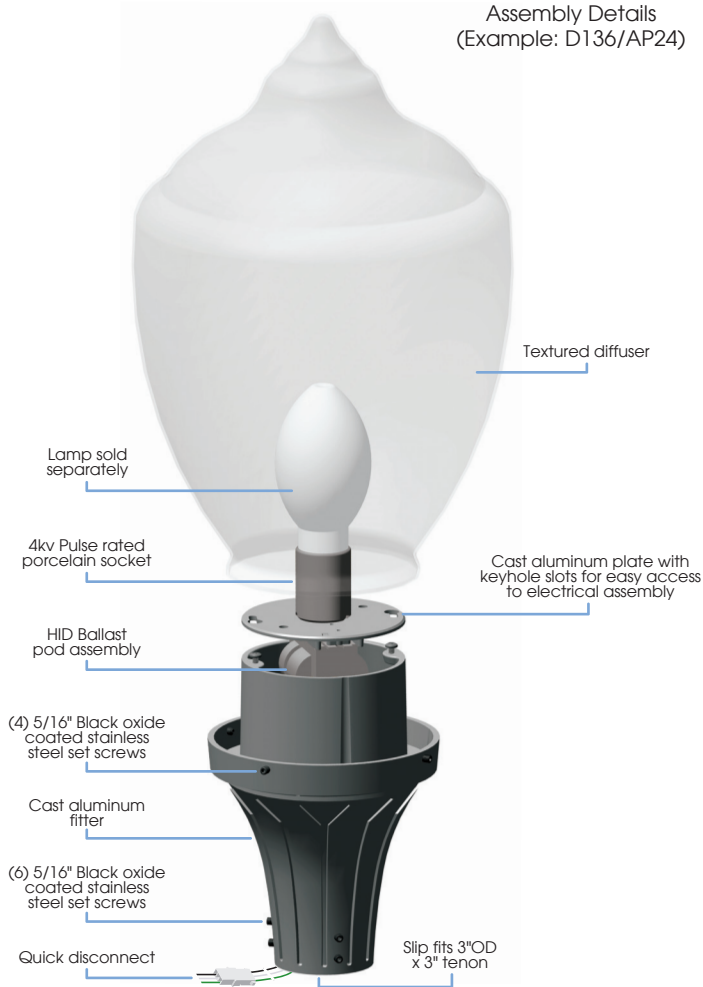

Options

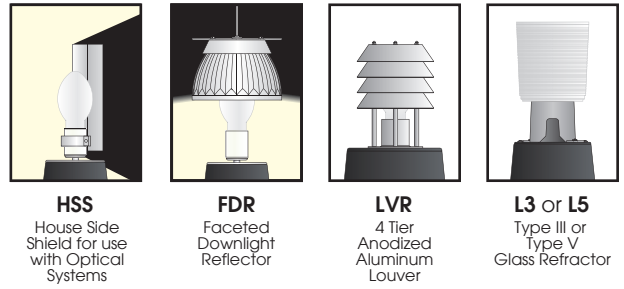

Photometry

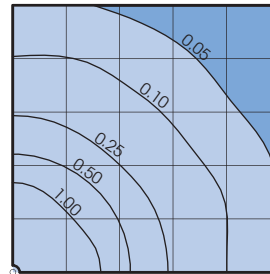

AP24 Assembly
Typical HID light source
14,000 Lumen
12' Mounting Height
Grid Spacing is 12'

Socket Types

Wattage	Socket Type
50MH, 70MH, 100MH, 150MH	Medium
175MH-PS, 250MH-PS	Mogul
50HPS, 70HPS, 100HPS	Medium
150HPS, 250HPS	Mogul