

ASR26 LED SERIES LUMINAIRE

U.4.1.16

DESCRIPTION:

Lighting for exterior retail, commercial and hospitality environments. The ASR26 Series consists of a refractive lens combined with a spun aluminum cap and one of several styles of cast aluminum fitters.

LED LUMINAIRE:

Multiple LED systems available with convection cooled driver, options for intensity, distribution and color. They operate with over voltage and short circuit protection and automatic voltage sensing for 120 to 277v input. (See next page for LED availability)

- 50,000+ hours of operational life
- Warm 3000K, neutral 4000K, or cool white 5000K color
- Dimmable (controller by others)
- Suitable for wet locations

ETL listed, suitable for wet locations.

INSTALLATION:

The luminaire will mount to a 3" OD post or tenon with 5/16" black oxide coated stainless steel set screws to ensure a solid connection. The diffuser will be held to the fitter by (4) 1/4-20" black oxide coated stainless steel captive set screws.

DIFFUSER CHOICES:

- Acrylic Type III (**AC-T3**)
- Acrylic Type V (**AC-T5**)
- Polycarbonate Type III (**PC-T3**)
- Polycarbonate Type V (**PC-T5**)

FINISH

Premium quality thermoset polyester powdercoat for a durable finish in the following:


- BLK** - Satin Black
- CLB** - Classic Bronze
- GBZ** - Gloss Textured Bronze
- GRN** - Green
- GTB** - Gloss Textured Black
- TBK** - Textured Black
- TGR** - Gloss Textured Green

ASR26
LED



PROJECT:

TYPE:

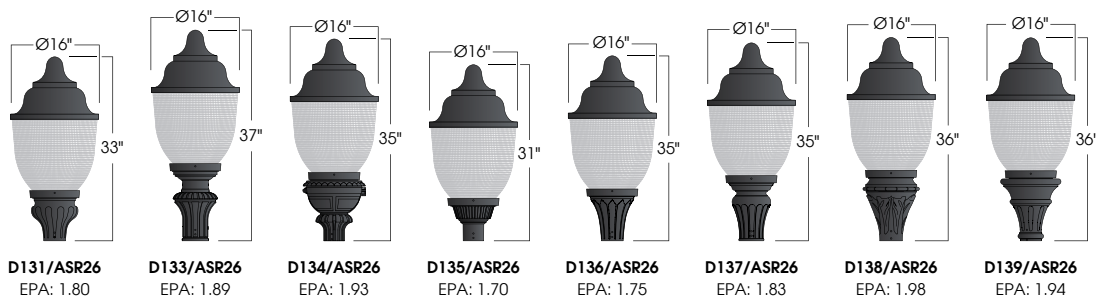

Ordering Information:

Model	Diffuser Material	Lens Distribution	LED System	Order Code	Finish	Option
D131/ASR26	AC PC	T3 T5	AVI VLE	3H 4H 5H 3L 4L 5L	BLK CLB GBZ GRN GTB TBK TGR Custom	BB BB-FW CFIN PCL
D133/ASR26						
D134/ASR26						
D135/ASR26						
D136/ASR26						
D137/ASR26						
D138/ASR26						
D139/ASR26						

See next page for more complete ordering options



5 year limited warranty
AMERLUX LED



Part String

Example: D131/ASR26/PC-T5/AVI-3H/BLK/CFIN

LED Options (bold indicates ordering code)



LED System	Light Distribution	Order Code	CCT	CRI	Light Engine Lumens	Nominal Input Power	Dimmable
VLE	Symmetric	3H	3,000K	80	5,600 lm	80W	0-10V
		4H	4,000K	80	5,700 lm		
		5H	5,000K	70	6,000 lm		
		3L	3,000K	80	3,000 lm	40W	
		4L	4,000K	80	3,300 lm		
		5L	5,000K	70	3,600 lm		

Example: **D131/ASR26AC-T5/VLE-SY-3H/BLK**