

ASR26 SERIES LUMINAIRE

U.11.15.18

ASR26
HID

DESCRIPTION:

Lighting for exterior retail, commercial and hospitality environments. The ASR26 Series consists of a high performance luminaire designed around an efficient Type III (T3) or Type V (T5) refractive acorn combined with one of several styles of cast aluminum fitters.

INSTALLATION:

The luminaire will mount to a 3" OD post or tenon with 5/16" black oxide coated stainless steel set screws to ensure a solid connection. The diffuser will be held to the fitter by (4) 5/16"-18 black oxide coated stainless steel set screws.

ELECTRICAL:

- High power factor ballast (HPF), core and coil type, pre-wired and tested
- Easy ballast pod access
- 4KV pulse rated porcelain socket
- Suitable for wet location

ETL listed, suitable for wet locations.

DIFFUSER CHOICES:

- Acrylic Type III (**AC-T3**)
- Acrylic Type V (**AC-T5**)
- Polycarbonate Type III (**PC-T3**)
- Polycarbonate Type V (**PC-T5**)

FINISH:

Durable thermoset polyester powdercoat finish in the following:

- Satin Black (**BLK**)
- Classic Bronze (**CLB**)
- Gloss Textured Bronze (**GBZ**)
- Green (**GRN**)
- Gloss Textured Black (**GTB**)
- Textured Black (**TBK**)
- Gloss Textured Green (**TGR**)

ACCESSORIES:

- Cast aluminum Finial (**CFIN**)
- Faceted Downlight Reflector (**FDR**)
- 90 Degree house-side shield (**HSS-90**)
- 180 Degree house-side shield (**HSS-180**)
- Dusk-to-dawn Photocell (**PCL**)




Shown with optional CFIN

PROJECT:


LOCATION:

FIXTURE TYPE:


NOTES:




D131/ASR26
EPA: 1.80



D134/ASR26
EPA: 1.93



D135/ASR26
EPA: 1.70



D136/ASR26
EPA: 1.75




Ordering Information




Add additional accessories as needed.

- | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>1 <u>Model</u>
 D131/ASR26
 D134/ASR26
 D135/ASR26
 D136/ASR26</p> <p>2 <u>Diffuser Choices</u>
 AC-T3- Acrylic Type 3
 AC-T5- Acrylic Type 5
 PC-T3- Polycarbonate Type 3
 PC-T5- Polycarbonate Type 5</p> <p>3 <u>Light Source</u>
 70MH - 70w Metal Halide
 100MH - 100w Metal Halide
 150MH - 150w Metal Halide
 70HPS - 70w High Pressure Sodium
 100HPS - 100w High Pressure Sodium
 150HPS - 150w High Pressure Sodium
 MDO - Medium Socket Only
 MGO - Mogul Socket Only</p> <p>4 <u>Voltage</u>
 120V
 208V
 240V
 277V</p> | <p>5 <u>Finish</u>
 BLK - Satin Black
 CLB - Classic Bronze
 GBZ - Gloss Textured Bronze
 GRN - Green
 GTB - Gloss Textured Black
 TBK - Textured Black
 TGR - Gloss Textured Green
 CSTM - Custom</p> <p>6 <u>Accessories</u>
 CFIN - Cast Aluminum Finial
 HSS-90 - 90° House Side Shield
 HSS-180 - 180° House Side Shield
 PCL - Dusk-to-dawn button type photocell</p> |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Assembly Details
(Example: D136/ASR26-CFIN)

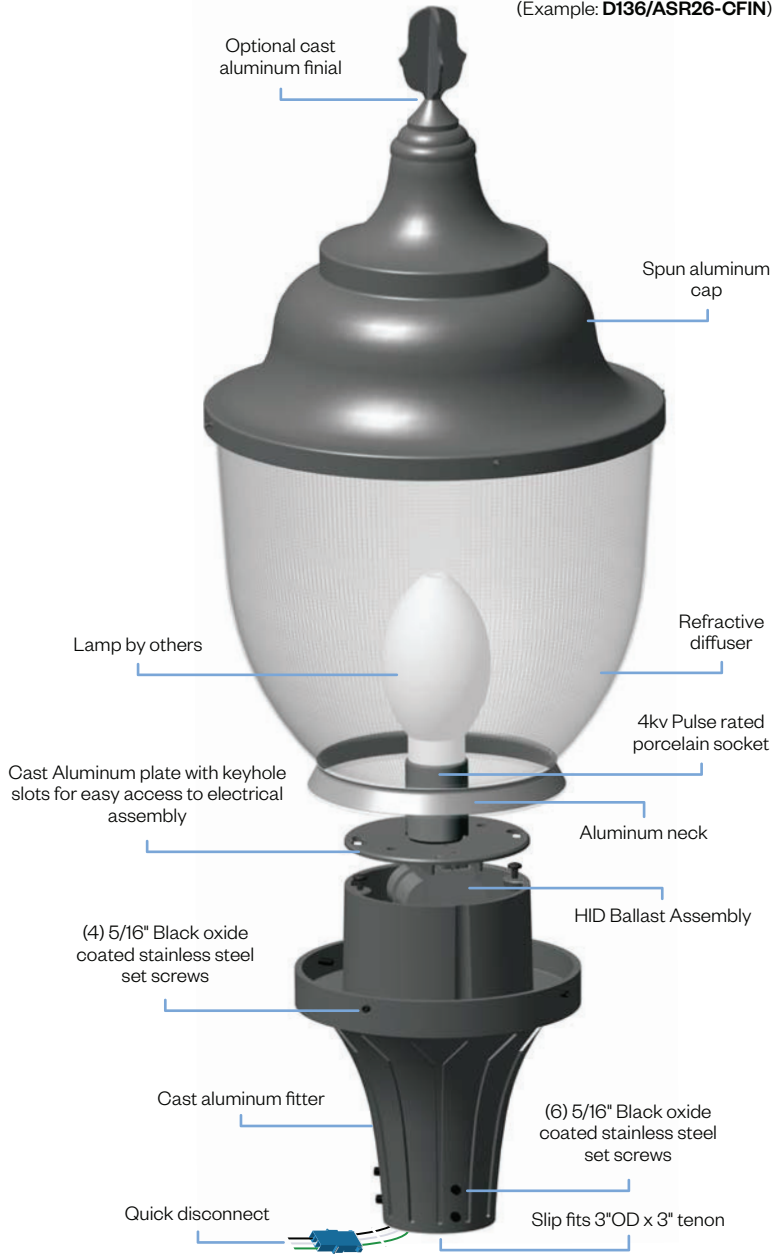

Options




HSS90 & HSS180
House Side Shield
for use with Optical
Systems


Standard Photometry

Typical HID light source
14,000 Lumen
12' Mounting Height
Grid Spacing is 12'

Type III (T3)

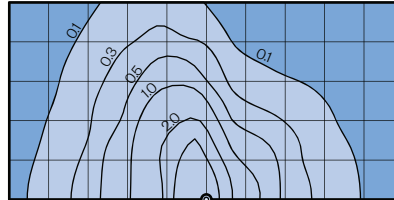

Type V (T5)



Socket Types

Wattage	Socket Type
70MH,100MH,150MH	Medium
70HPS,100HPS	Medium
150HPS	Mogul