

ASR26 SERIES LUMINAIRE

U.4.1.16

Description

Lighting for exterior retail, commercial and hospitality environments. The ASR26 Series consists of a high performance luminaire designed around an efficient Type III (T3) or Type V (T5) refractive acorn combined with one of several styles of cast aluminum fitters.

Electrical

- High power factor ballast (HPF), core and coil type, pre-wired and tested
- Easy ballast pod access
- 4KV pulse rated porcelain socket
- Suitable for wet location

ETL listed, suitable for wet locations.

Installation

The luminaire will mount to a 3" OD post or tenon with 5/16" black oxide coated stainless steel set screws to ensure a solid connection. The diffuser will be held to the fitter by (4) 1/4-20" black oxide coated stainless steel captive set screws.

Diffuser choices

- Acrylic Type III (AC-T3)
- Acrylic Type V (AC-T5)
- Polycarbonate Type III (PC-T3)
- Polycarbonate Type V (PC-T5)

FINISH

Premium quality thermoset polyester powdercoat for a durable finish in the following:


- BLK** - Satin Black
- CLB** - Classic Bronze
- GBZ** - Gloss Textured Bronze
- GRN** - Green
- GTB** - Gloss Textured Black
- TBK** - Textured Black
- TGR** - Gloss Textured Green



ASR26
HID



PROJECT:
TYPE:

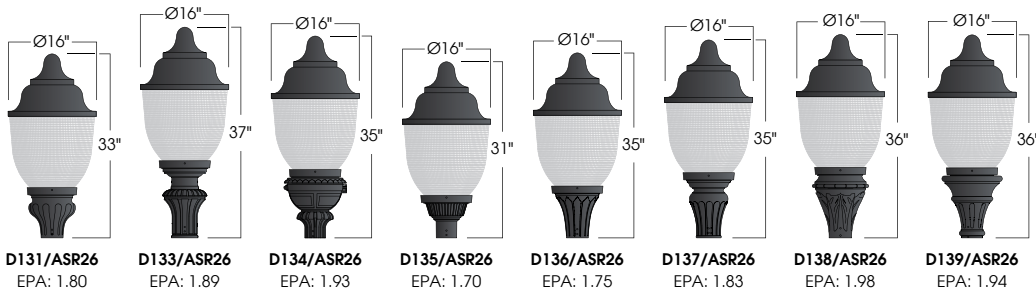

Ordering Information:


Model	Diffuser Material	Lens Distribution	Light Source	Voltage	Finish	Accessory
D131/ASR26 D133/ASR26 D134/ASR26 D135/ASR26 D136/ASR26 D137/ASR26 D138/ASR26 D139/ASR26	AC PC	T3 T5	50,70MH 100,150MH 175,250MH-PS 50,70HPS 100,150HPS 250HPS	120v 208v 240v 277v	BLK CLB GBZ GRN GTB TBK TGR Custom	BB BB-FW CFIN HSS-90 HSS-180 PCL

See next page for more complete ordering options


Part String

Example: D131/ASR26/AC-T5/150MH/208v/BLK


Assembly Details
(Example: **D136/ASR26-CFIN**)

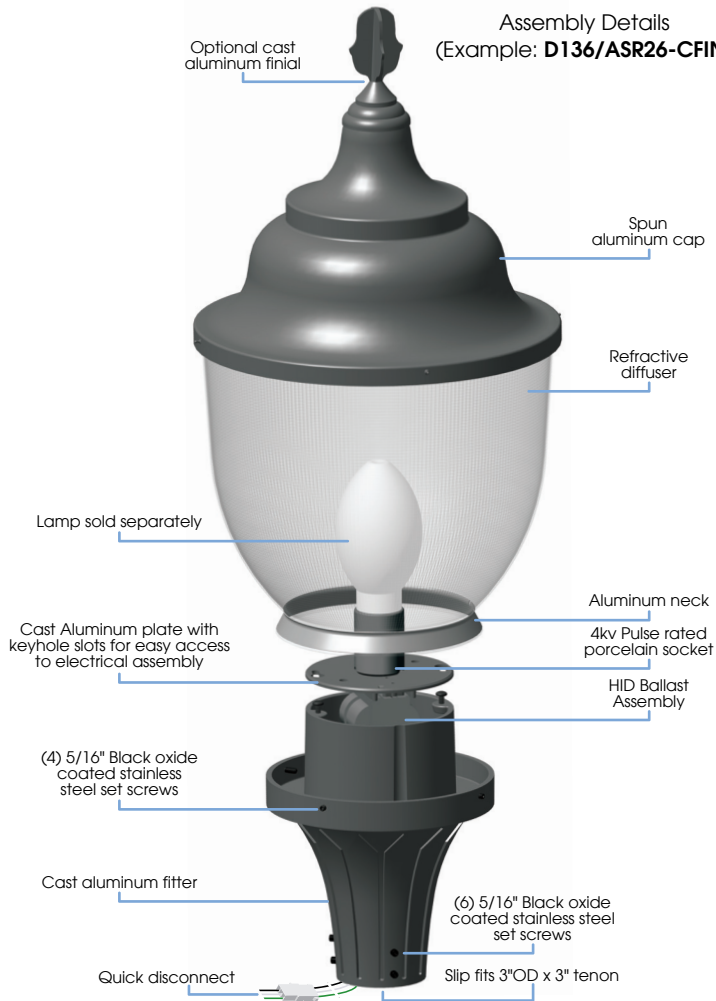

Options



HSS
House Side Shield for use with Optical Systems




SLL-FDR
Faceted Downlight Reflector


Standard Photometry

Typical HID light source
14,000 Lumen
12' Mounting Height
Grid Spacing is 12'

Type III (T3)

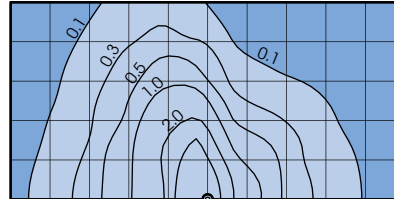

Type V (T5)



Socket Types

Wattage	Socket Type
50MH, 70MH, 100MH, 150MH	Medium
175MH-PS, 250MH-PS	Mogul
50HPS, 70HPS, 100HPS	Medium
150HPS, 250HPS	Mogul