

LED ROUND TOP BOLLARD

U.3.5.18

Model:
AXB7R

Housing:

Extruded aluminum housing with flush mounting base & vandal-resistant screws, round top, powdercoat finish over a chromate conversion coating, internal driver tray for easy maintenance.

Reflector:

Specially designed aluminum cone reflector for LED.

Mounting:

Mounting kit with 8" anchor bolts (included).

LED System:

1,450 lm (4K)
1,510 lm (5K)
CRI: 83
CCT: 4000K, 5000K
Aluminum LED Board

Lens:

Clear polycarbonate lens

Wattage:

17W

Driver:

Electronic Driver, 120-277V, 50/60Hz
0-10v Dimmable Driver

Listing & Ratings:

CSA: Listed for wet locations. IP65
Operating Temperatures: -40°C to +40°C

Options:

- Surge Protection (**SP**)
- Battery Backup (**3EBL**)
- Custom colors available upon request.
- Bollards can be cut to custom heights upon request.

Finish:

- Z** (Bronze)
- B** (Black)
- C** (Custom)



AXB7R
LED




PROJECT:

TYPE:

AXB7R / 5K

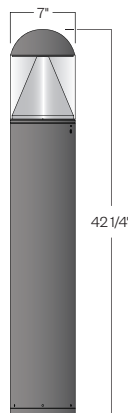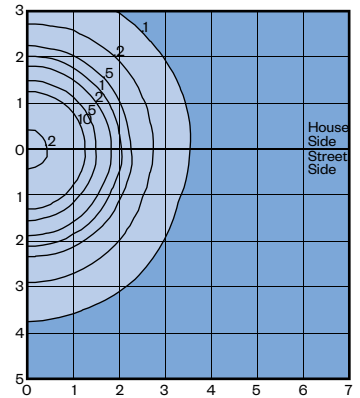

Anchor Bolts



Ordering Information

| Model | Light Distribution | Code | CCT | Nominal Input Power | Finish | Option |
|--------------|--------------------|-----------|--------|---------------------|----------------------|--------------------------|
| AXB7R | Medium Beam Spread | 4K | 4,000K | 17W | Z B | 3EBL SP |
| | | 5K | 5,000K | | | |

Ordering options in BOLD

Amerlux reserves the right to change details that do not affect overall function and performance.

5 year limited warranty
AMERLUX LED



Part String

Example: **AXB7R / 4K / B**

