

# LED ROUND TOP BOLLARD

U.3.29.18

**Model:**  
**AXB7R**

**Housing:**  
Extruded aluminum housing with flush mounting base & vandal-resistant screws, round top, powdercoat finish over a chromate conversion coating, internal driver tray for easy maintenance.

**Reflector:**  
Specially designed aluminum cone reflector for LED.

**Mounting:**  
Mounting kit with 8" anchor bolts (included).

**LED System:**  
1,450 lm (4K)  
1,510 lm (5K)  
CRI: 83  
CCT: 3000K, 4000K, 5000K  
Aluminum LED Board

**Listing & Ratings:**  
CSA: Listed for wet locations. IP65  
Operating Temperatures: -40°C to +40°C

**Options:**

- Surge Protection (**SP**)
- Battery Backup (**3EBL**)
- Custom colors available upon request.
- Bollards can be cut to custom heights upon request.

**Lens:**  
Clear polycarbonate lens

**Wattage:**  
17W

**Driver:**  
Electronic Driver, 120-277V, 50/60Hz  
0-10v Dimmable Driver

**Finish:**  
**Z** (Bronze)  
**B** (Black)  
**C** (Custom)



**AXB7R**  
LED




PROJECT:

TYPE:

**AXB7R / 5K**

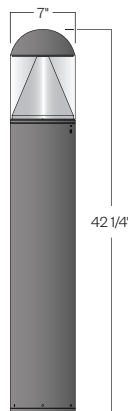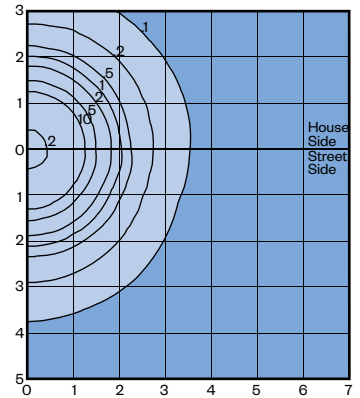

**Anchor Bolts**



**Ordering Information**

Model	Light Distribution	Code	CCT	Nominal Input Power	Finish	Option
<b>AXB7R</b>	Medium Beam Spread	<b>3K</b>	3,000K	17W	<b>Z</b> <b>B</b>	<b>3EBL</b> <b>SP</b>
		<b>4K</b>	4,000K			
		<b>5K</b>	5,000K			

Ordering options in BOLD

Amerlux reserves the right to change details that do not affect overall function and performance.

www.amerlux.com • (T) 281.997.5400 • (F)281-997-5441

**5** year limited warranty  
AMERLUX LED



**Part String**

Example: **AXB7R / 4K / B**

