

D154-TS20 SERIES LUMINAIRE

U.11.13.18

DESCRIPTION:

This contemporary styled D154-TS20 Series combines a cast aluminum housing, a spun aluminum shade and segmented reflector to create an efficient luminaire with Type III (HR3) or Type V (HR5) light distribution.

ELECTRICAL:

- High power factor ballast (HPF), core and coil type, pre-wired and tested
- 4KV pulse rated porcelain socket

ETL listed, suitable for wet locations.

INSTALLATION:

The luminaire will mount to the bracket as shown on the reverse page. Post top luminaire brackets will mount to a 3" OD post or tenon with (6) 5/16" stainless steel set screws.

OPTICAL SYSTEMS:

(HR3) - Type III segmented reflector with a clear flat tempered glass.

(HR5) - Type V segmented reflector with a clear flat tempered glass.

FINISH:

Durable thermoset polyester powdercoat finish in the following:

- Satin Black (**BLK**)
- Classic Bronze (**CLB**)
- Gloss Textured Bronze (**GBZ**)
- Green (**GRN**)
- Gloss Textured Black (**GTB**)
- Textured Black (**TBK**)
- Gloss Textured Green (**TGR**)



Standard



With HR-OCA

D154-TS20
HID




PROJECT:


LOCATION:

FIXTURE TYPE:

NOTES:

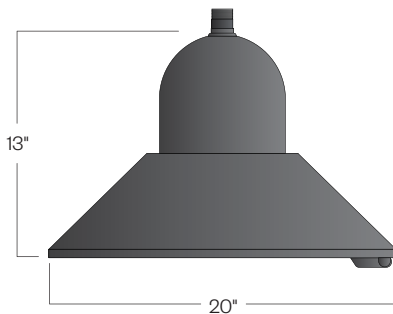

D154-TS20
EPA: 1.23

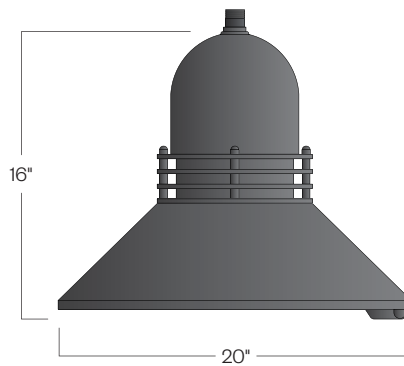

D154-TS20RUL
EPA: 1.23



D154-TS20 SERIES LUMINAIRE


D154-TS20
HID

Ordering Information




- | | |
|---|--|
| 1 <u>Model</u>
D154-TS20
D154-TS20RUL | 4 <u>Voltage</u>
120v
208v
240v
277v |
| 2 <u>Optical System</u>
HR3 - Type 3 Reflector
HR5 - Type 5 Reflector | 5 <u>Finish</u>
BLK - Satin Black
CLB - Classic Bronze
GBZ - Gloss Textured Bronze
GRN - Green
GTB - Gloss Textured Black
TBK - Textured Black
TGR - Gloss Textured Green
CSTM - Custom |
| 3 <u>Light Source</u>
70MH - 70w Metal Halide
100MH - 100w Metal Halide
150MH - 150w Metal Halide
70HPS - 70w High Pressure Sodium
100HPS - 100w High Pressure Sodium
150HPS - 150w High Pressure Sodium | |

Mounting Ordering Information




- | | |
|---|--|
| 1 <u>Model</u>
PT01
PT12
WBRO3
WBRO6-13PM
WBRO6-15PM
CBR40-2-24-S
CBR40-1-24-S | 2 <u>Finish</u>
BLK - Satin Black
CLB - Classic Bronze
GBZ - Gloss Textured Bronze
GRN - Green
GTB - Gloss Textured Black
TBK - Textured Black
TGR - Gloss Textured Green
CSTM - Custom |
|---|--|

Assembly Details
(PT01 / D154-TS20/HR3-GL)

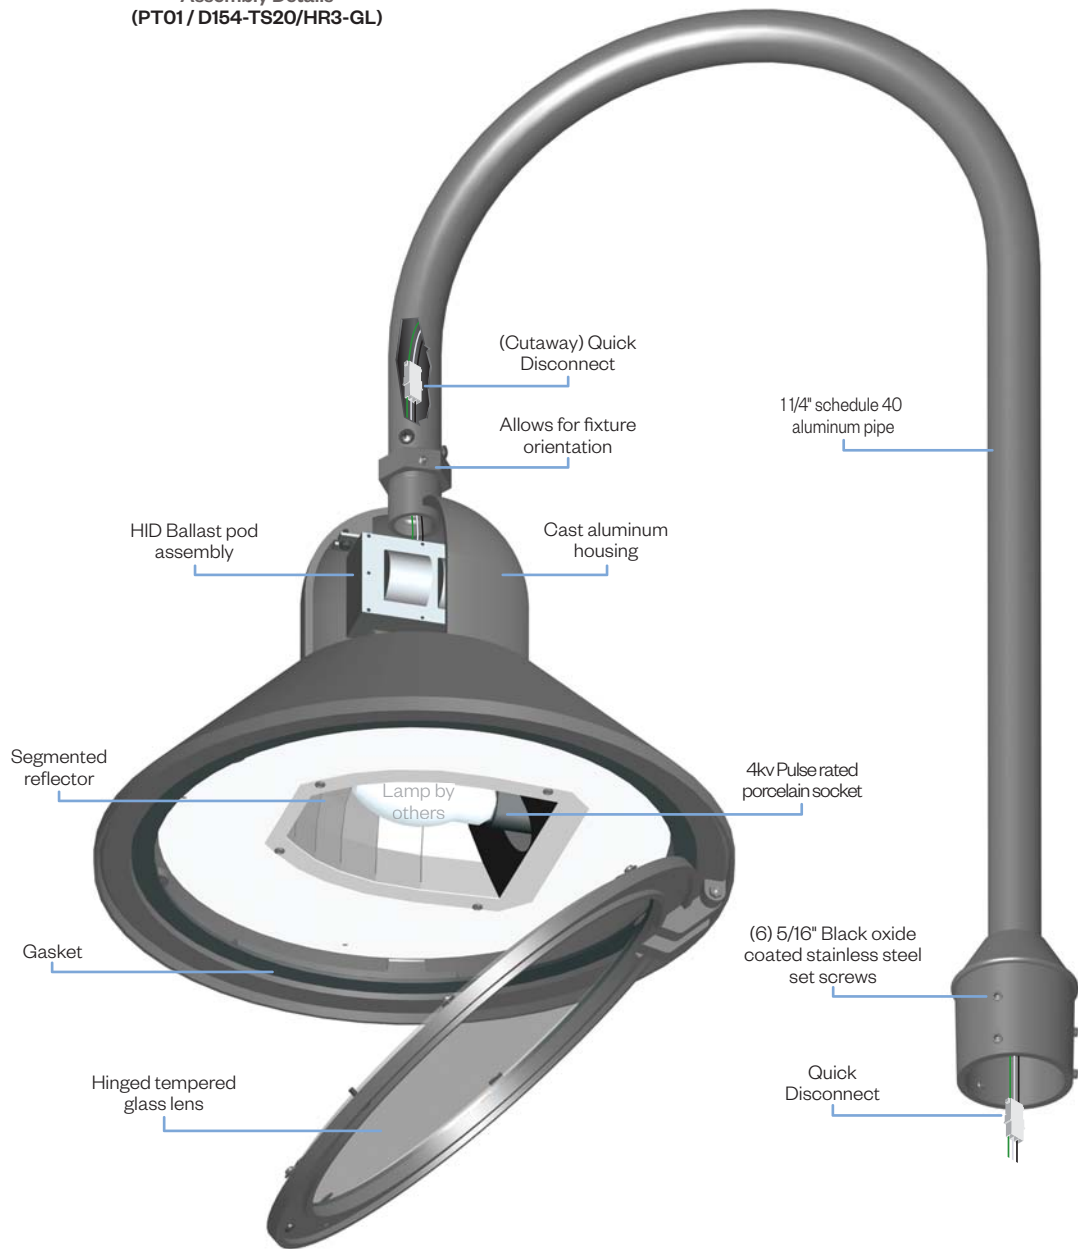

Standard Photometry



PT01/D154-TS20/HR5
Typical HID light source
8,500 Lumen
12' Mounting Height
Grid Spacing is 12'

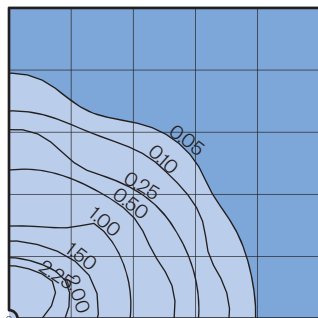

Socket Types

Wattage	Socket Type
70MH,100MH	Medium
70HPS,100HPS	Medium

Mounting Options

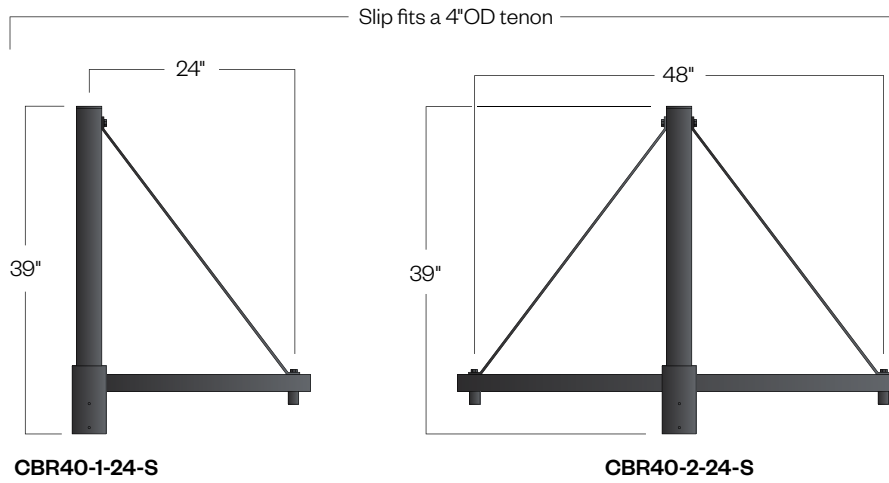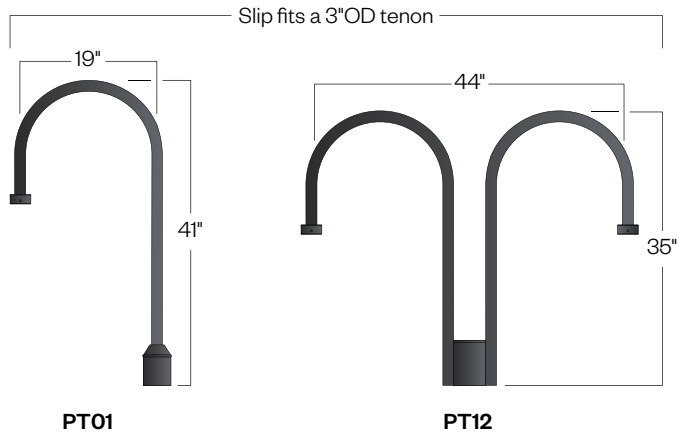

Wall Brackets

