

# D154-TS20 SERIES LUMINAIRE

U.4.10.19

## DESCRIPTION:

This contemporary styled D154-TS20 Series combines a cast aluminum housing, a spun aluminum shade and segmented reflector to create an efficient luminaire with Type III (HR3) or Type V (HR5) light distribution.

## ELECTRICAL:

- High power factor ballast (HPF), core and coil type, pre-wired and tested
- 4KV pulse rated porcelain socket

**ETL listed, suitable for wet locations.**

## INSTALLATION:

The luminaire will mount to the bracket as shown on the reverse page. Post top luminaire brackets will mount to a 3" OD post or tenon with (6) 5/16" stainless steel set screws.

## OPTICAL SYSTEMS:

**(HR3)** - Type III segmented reflector with a clear flat tempered glass.

**(HR5)** - Type V segmented reflector with a clear flat tempered glass.

## FINISH:

Durable thermoset polyester powdercoat finish in the following:

- Satin Black (**BLK**)
- Classic Bronze (**CLB**)
- Gloss Textured Bronze (**GBZ**)
- Green (**GRN**)
- Gloss Textured Black (**GTB**)
- Textured Black (**TBK**)
- Gloss Textured Green (**TGR**)

D154-TS20  
HID



PROJECT:

LOCATION:

FIXTURE TYPE:


NOTES:




Standard



With HR-OCA

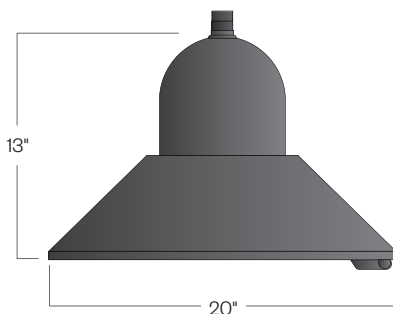

**D154-TS20**  
EPA: 1.23

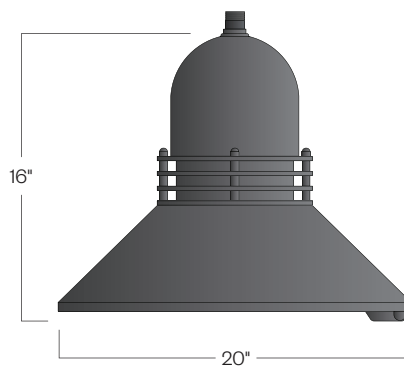

**D154-TS20RUL**  
EPA: 1.23



# D154-TS20 SERIES LUMINAIRE

D154-TS20  
HID

## Ordering Information



**1** Model  
**D154-TS20**  
**D154-TS20RUL**


**2** Optical System  
**HR3** - Type 3 Reflector  
**HR5** - Type 5 Reflector

**3** Light Source  
**70MH** - 70w Metal Halide  
**100MH** - 100w Metal Halide  
**150MH** - 150w Metal Halide  
**70HPS** - 70w High Pressure Sodium  
**100HPS** - 100w High Pressure Sodium  
**150HPS** - 150w High Pressure Sodium  
**MDO** - Medium Socket Only

**4** Voltage  
**120v**  
**208v**  
**240v**  
**277v**

**5** Finish  
**BLK** - Satin Black  
**CLB** - Classic Bronze  
**GBZ** - Gloss Textured Bronze  
**GRN** - Green  
**GTB** - Gloss Textured Black  
**TBK** - Textured Black  
**TGR** - Gloss Textured Green  
**CSTM** - Custom


## Mounting Ordering Information



**1** Model  
**PT01**  
**PT12**  
**WBRO3**  
**WBRO6-13PM**  
**WBRO6-15PM**  
**CBR40-2-24-S**  
**CBR40-1-24-S**


**2** Finish  
**BLK** - Satin Black  
**CLB** - Classic Bronze  
**GBZ** - Gloss Textured Bronze  
**GRN** - Green  
**GTB** - Gloss Textured Black  
**TBK** - Textured Black  
**TGR** - Gloss Textured Green  
**CSTM** - Custom

Assembly Details  
(PT01 / D154-TS20/HR3-GL)

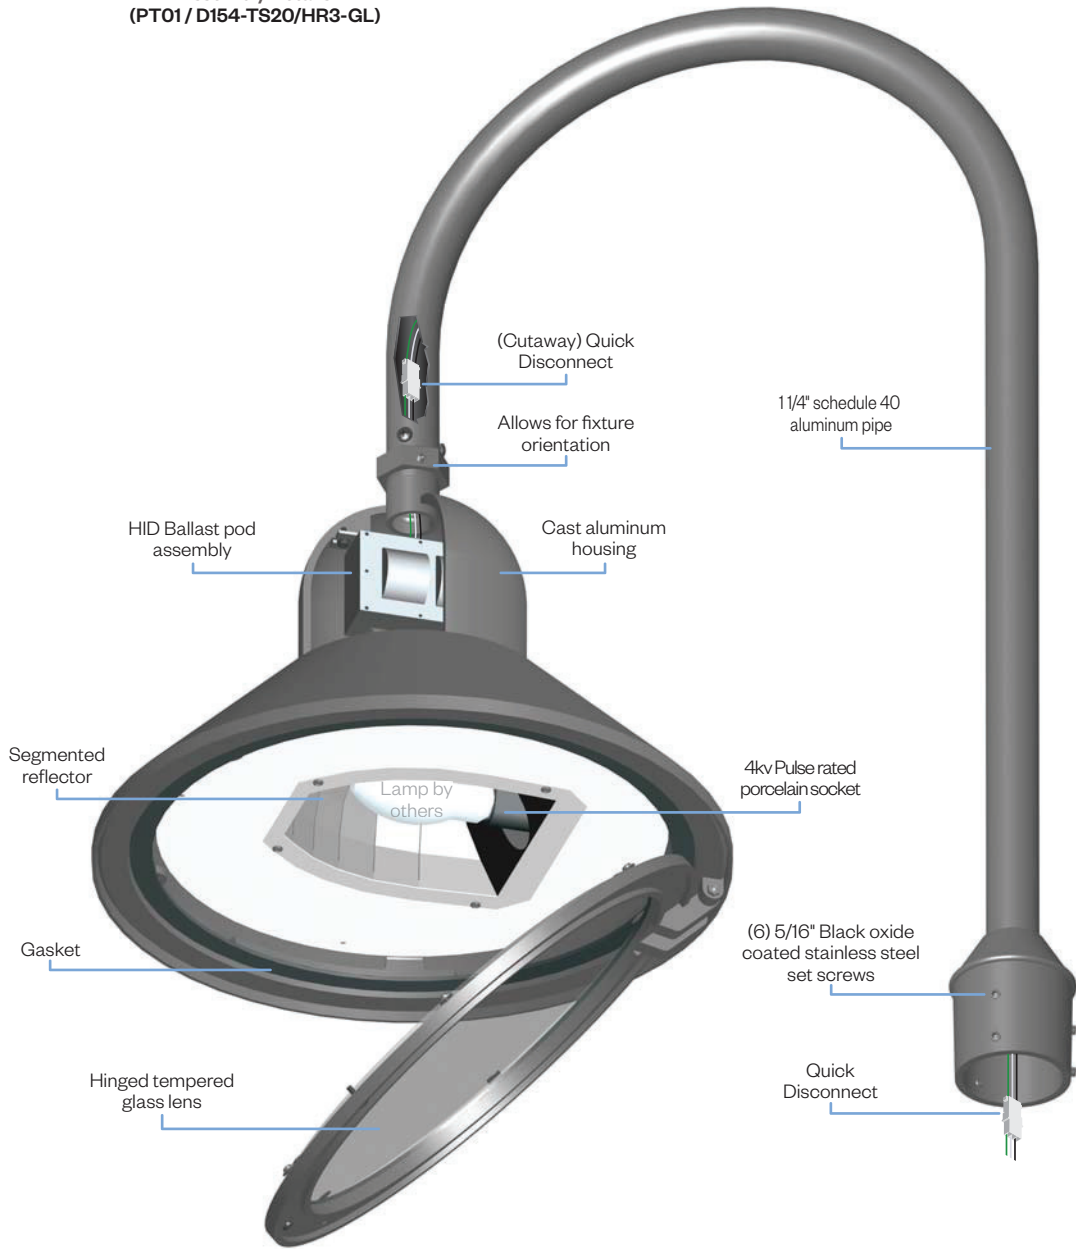

Standard Photometry



PT01/D154-TS20/HR5  
Typical HID light source  
8,500 Lumen  
12' Mounting Height  
Grid Spacing is 12'

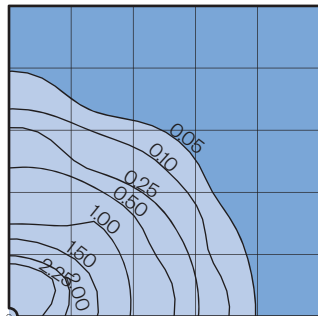

Socket Types

Wattage	Socket Type
70MH,100MH	Medium
70HPS,100HPS	Medium

## Mounting Options

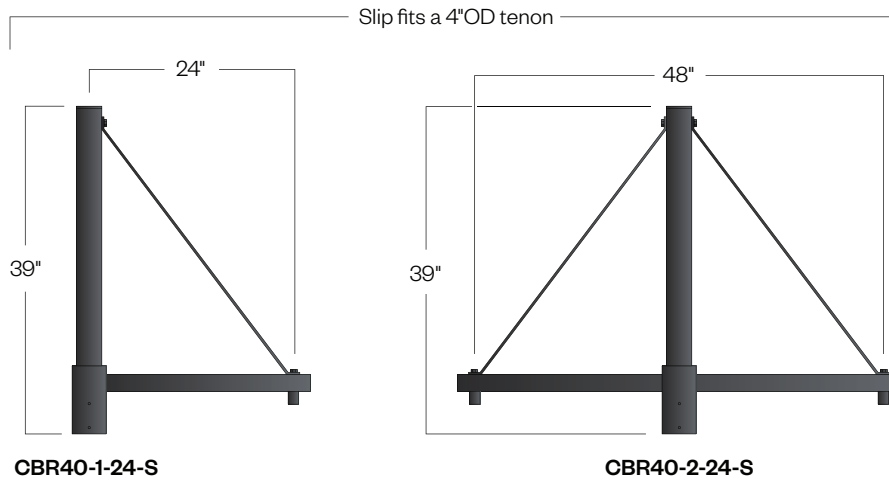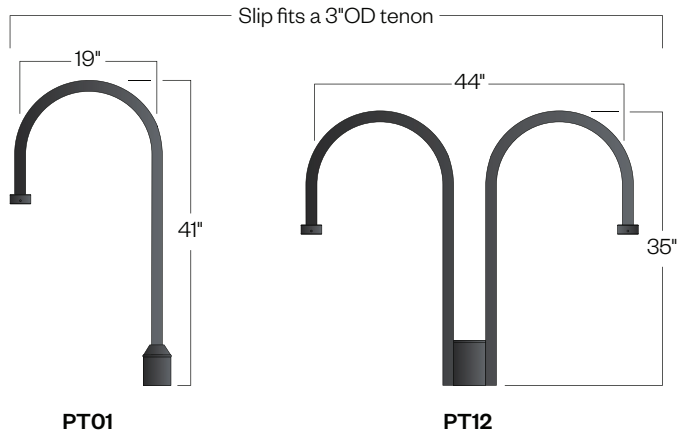

---

## Wall Brackets

