

DU730ARP SERIES UTILITY LUMINAIRE

U.6.10.16

Features

- Easy accessibility
- Interchangeable ballast pods
- Ease of maintenance
- Optional light control

Installation

The luminaire will mount to a 3" OD post or tenon with 5/16" black oxide coated stainless steel square head set screws to ensure a solid connection. The diffuser will be held to the fitter by (4) 5/16 black oxide coated stainless steel captive square head set screws.

Electrical

- High power factor ballast (HPF), core and coil type, pre-wired and tested (NPF available)
- Easy ballast pod access
- 4KV porcelain socket
- ETL label "suitable for wet location"

Accessories:

- 90 degree house-side shield (HSS-90)
- 180 degree house-side shield (HSS-180)
- Twist-lock photocell (PCL-TW)
- Perforated light lid (LL)
- Solid light lid (SLL)
- Light lid-downlight reflector (SLL-FDR)


Diffuser choices

- Acrylic Type III (AC-T3)
- Acrylic Type V (AC-T5)
- Polycarbonate Type III (PC-T3)
- Polycarbonate Type V (PC-T5)

Finish:

Premium quality thermoset polyester powdercoat for a durable finish in the following:

- | | |
|------------------------------------|-----------------------------------|
| BLK - Satin Black | GTB - Gloss Textured Black |
| CLB - Classic Bronze | TBK - Textured Black |
| GBZ - Gloss Textured Bronze | TGR - Gloss Textured Green |
| GRN - Green | |




DU730ARP
UTILITY



PROJECT:

TYPE:

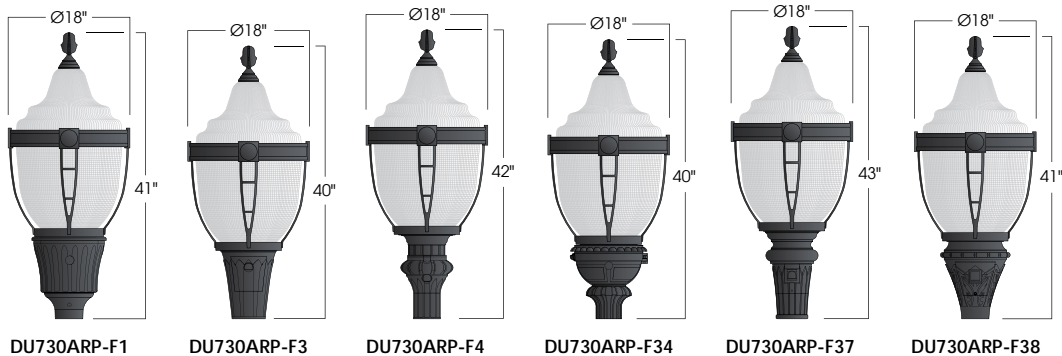

Ordering Information:

Model	Lens Material	Light Distribution	Light Source	Voltage	Finish	Accessory
DU730ARP-F1 DU730ARP-F3 DU730ARP-F4 DU730ARP-F34 DU730ARP-F37 DU730ARP-F38	AC PC	T3 T5	50,70MH 100,150MH 175,250MH-PS 50,70HPS 100,150HPS 250HPS CFL13,26,32,42	120v 208v 240v 277v	BLK CLB GBZ GRN GTB TBK TGR Custom	HSS-90 HSS-180 PCL-TW LL SLL SLL-FDR

See next page for more complete ordering options



Part String

Example: DU730ARP-F1PC-T5/100MH/120V/BLK

