

LINEA® 1.5"

LINEAR WALL WASH LED

APPLICATIONS:

Commercial and retail wall wash lighting

CONSTRUCTION:

One piece extruded aluminum housing
Internal components are die-formed galvanized and cold-rolled steel
Individual housing lengths are 47 3/4" or 95 1/4"
Continuous rows can be provided to the nearest foot
High reflectance white finish. For other finishes, consult factory

MOUNTING:

Aircraft cable suspension or surface mount
Fixtures may be continuously row-mounted, consult factory
Fixture placement:

MIN: 18" from wall
IDEAL: 24" from wall
MAX: 36" from wall

OPTICS:

Die-formed high reflectance white enamel reflector
Lens: 100% extruded acrylic lens with custom formulation for lamp image diffusion and maximum light transmission. Flush mount snap-in installation.

ELECTRICAL:

Electronic, multi-volt (120v-277v) constant current driver
0-10v dimming standard
This product complies with IEEE C62.41 for surge endurance up to 3KV. Amerlux® recommends using additional surge protection with this unit (supplied by others), surge damage is not covered by warranty.
Emergency circuit via remote inverter or auxiliary emergency power supply (by others)

LABELING:





For indoor use only

LIN1.5-WW
LED



PROJECT:

TYPE:

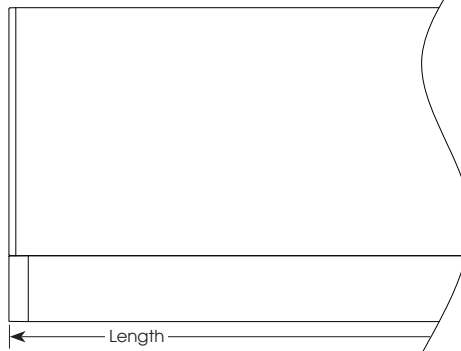

ELECTRICAL

Electronic driver

Wattage per foot		4'		8'	
		System watts	Amps	System watts	Amps
5	120v	20	.17	40	.33
	277v	20	.07	40	.14
10	120v	40	.33	80	.67
	277v	40	.14	80	.29

ORDERING INFORMATION:

Model	Mounting	Wattage	Lamp Type	Color Temp	Finish	Voltage	Length	Configuration	Options
LIN1.5-WW	ASW10 - aircraft cable with straight feed, (18ga., 5 conductor), white, 10' SM - surface mount	5 10	LED	2700 3000 3500 4000	HW - high reflectance white - white - (other RAL)	120/277	4 8 _____ (run to nearest foot)	IND - individual BOR - beginning of run MOR - middle of run EOR - end of run	HILUME-DH - Lutron Hi-lume® 3 wire, 1% dim HILUME-ECO - Lutron Hi-lume® EcoSystem, 1% dim

Example: LIN1.5-WW-ASW10-10-LED-3500-HW-120/277-4-IND

Cat #:

Amerlux reserves the right to change details that do not affect overall function and performance.

Amerlux®, LLC • 178 Bauer Drive, Oakland, NJ 07436 • P: 973.882.5010 F: 973-882.2605 • www.amerlux.com

LIT-1714 rev 9/16



10 year limited warranty
AMERLUX LED
(see website for details)