



LUMINAIRE ACCESSORIES

U.2.21.19

Reflectors and Shields




FDR
(Faceted Downlight Reflector)

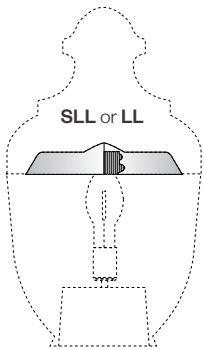


LL
(Light Lid)
Perforated aluminum reflector minimizes light to the upper hemisphere, while providing an aesthetically pleasing glow to the top of the diffuser.

SLL
(Solid Light Lid)
Solid aluminum reflector
Both models are limited to use on the fixture series below:
AO28, ARP23, D730AO, D730ARP

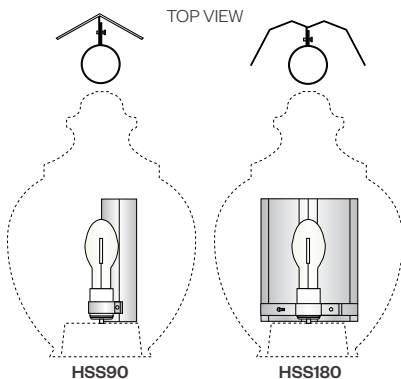


HSS-90 (90 degree cutoff)
HSS-180 (180 degree cutoff)
House side shields are available to cutoff all direct light through certain horizontal angles. Both models clamp around the socket and are designed to be positioned in the field after installation of the fixture. If ordering for a retrofit application, the socket type must be specified.


Light Control Options

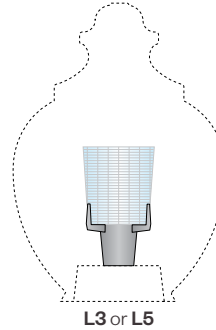

GLASS REFRACTOR
Borosilicate glass refractor with IES Type III (**L3**) or Type V (**L5**) light distribution can be specified in most fixtures that don't have an integral refractive lens. The refractor can be retrofit in existing fixtures without tools or electrical modifications.



Dusk to dawn photocell
Available for 120v (**PCL**) or 208-277v (**PCL multi**).



CFIN
Cast aluminum finial



FIN-08
Cast aluminum finial



FIN-760
Cast aluminum finial