

# Lunetta

## LED Walkway Bollard



LUN10-18/30/SDS



### Features



LED integration throughout the site is possible with Amerlux's Lunetta bollard, which includes a highly efficient and long lasting LED array. A straight round 2.5" aluminum pole emanates from the ground and begins to flare until gracefully reaching the recessed light source running around the perimeter. The Lunetta bollard has no visible fasteners or hardware, which adds to its sleek design.

### Product Overview

Wattage:	16W
Lumen Output:	1,420 lm (4,000K)
Color Temp:	2,700K / 3,000K / 3,500K / 4,000K
Dimming:	0-10v
Weight at 24in:	6 lbs
Max Height:	42 inches
Diameter:	10 inches

### PROJECT:

### TYPE:

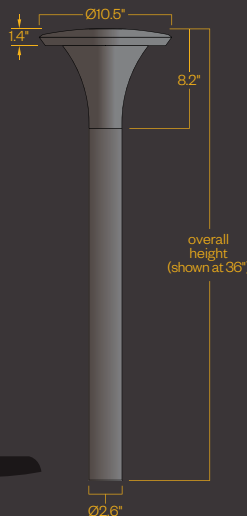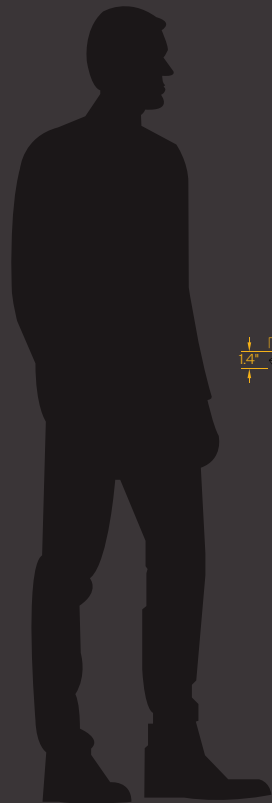

### Description:

Lighting for exterior retail and hospitality environment, university and corporate campuses, or any outdoor meeting space.

### LED Array:

(40) High brightness SMD LEDs delivering approximately 1,430 lm. Sealed under polycarbonate optical lens, resistant to UV and thermal shock. It runs at approximately 16W.

### LED Driver Module:

- Electronic driver operates at 550mA with 120v-277V AC input
- 0-10v dimming

### Materials:

Anchor base - Cast aluminum (356-T6)  
 Shaft - Extruded aluminum (6063-T6)  
 Cone - Spun aluminum (3003)

**ETL listed, suitable for wet locations.**

### Finish:

Premium quality thermoset polyester powdercoat for a durable finish.

- |                              |                              |
|------------------------------|------------------------------|
| <b>ANT</b> - Anthracite Gray | <b>BLK</b> - Satin Black     |
| <b>CLB</b> - Classic Bronze  | <b>SDS</b> - Stardust Silver |
| <b>WHT</b> - White           | Custom _____                 |



# Lunetta

LED Walkway Bollard



PROJECT:

TYPE:

## Ordering Information

LUN10 /          /           
**1**            **2**            **3**

**1** Model  
**LUN10**

**2** Overall Height  
**18 - 18"**  
**24 - 24"**  
**30 - 30"**  
**36 - 36"**  
**42 - 42"**

**3** CCT  
**27 - 2,700K**  
**30 - 3,000K**  
**35 - 3,500K**  
**40 - 4,000K**

**4** Finish  
**ANT** - Anthracite Gray  
**BLK** - Satin Black  
**CLB** - Classic Bronze  
**SDS** - Stardust Silver  
**WHT** - White  
Custom\_\_\_\_\_

# Lunetta


LED Walkway Bollard



PROJECT:


TYPE:

## Performance

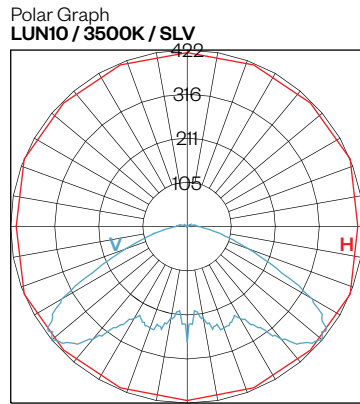


Maximum Candela = 421.68  
Located At Horizontal Angle = 22.5  
Vertical Angle = 50  
H - Horizontal Axial Candela  
V - Vertical Axial Candela  
**B1-U2-G1**

## Cutaway View

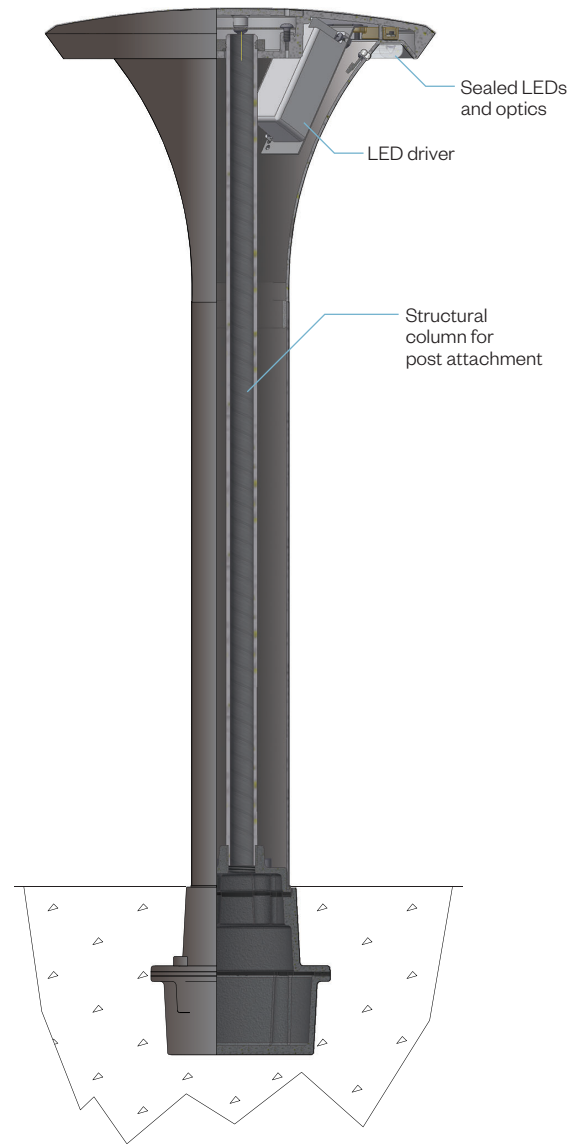

## Anchorage Details

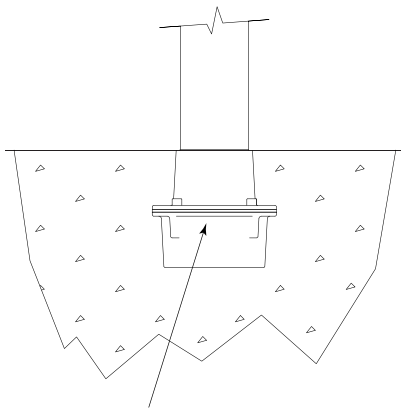

Subterranean, thick-walled sand cast aluminum junction box with two, 1/2" NPT threaded conduit openings in bottom standard, with access for wiring and inspection

## Performance Chart

Overall Height	CCT	Approx. Lumens Delivered (With SDS finish)	Nominal Input Power
18 (18")	27 (2,700K)	1,310 lm	16W
24 (24")	30 (3,000K)	1,350 lm	
30 (30")	35 (3,500K)	1,380 lm	
36 (36")	40 (4,000K)	1,420 lm	
42 (42")			