

Passo CR

4" Stainless Steel Soft Glow
LED Recessed Wall Luminaire



PCSS4

Features


The Passo family of luminaires includes high quality, architecturally relevant fixtures suitable for use in both outdoor or indoor applications. All members of the Passo family feature an independently sealed optical chamber and fully potted driver. These features are especially beneficial in exterior applications as they help compensate for the challenges in getting a good seal between a pre-installed back box and the faceplate as well as those challenges in fully sealing the conduit system. Each luminaire is available in a choice of two output levels to help tailor the desired illuminance to the project and a standard 0-10v dimmable driver allows even further flexibility.

Product Overview


Wattage:	Up to 2.7W
Lumen Output:	Up to 81 lm
Color Temp:	2,700K / 3,000K / 4,000K
Dimming:	0-10v down to 10%

PROJECT:

TYPE:



Profile



PCSS4

Application:

Designed for new construction in interior or exterior hollow walls or poured concrete.

Construction:

- Electrical grade cast aluminum housing
- Internal optical chamber
- Stainless steel faceplate (316L)
- 1/8" tempered opal glass lens

Driver:

- Drive Current (100 or 175mA)
- 2.5kv surge protection
- Fully potted
- Input voltage 120v-277v auto-sensing
- 0-10v dimmable down to 10%

ETL listed, suitable for wet locations.


Optics:

Individually sealed optical chamber insures LEDs are secure independent of the installation of the back box.

PCSG4



An optional crossguard faceplate is available. This faceplate must be specified at the time of order.



Passo CR


4" Stainless Steel Soft Glow LED
Recessed Wall Luminaire



PROJECT:


TYPE:

Construction Detail

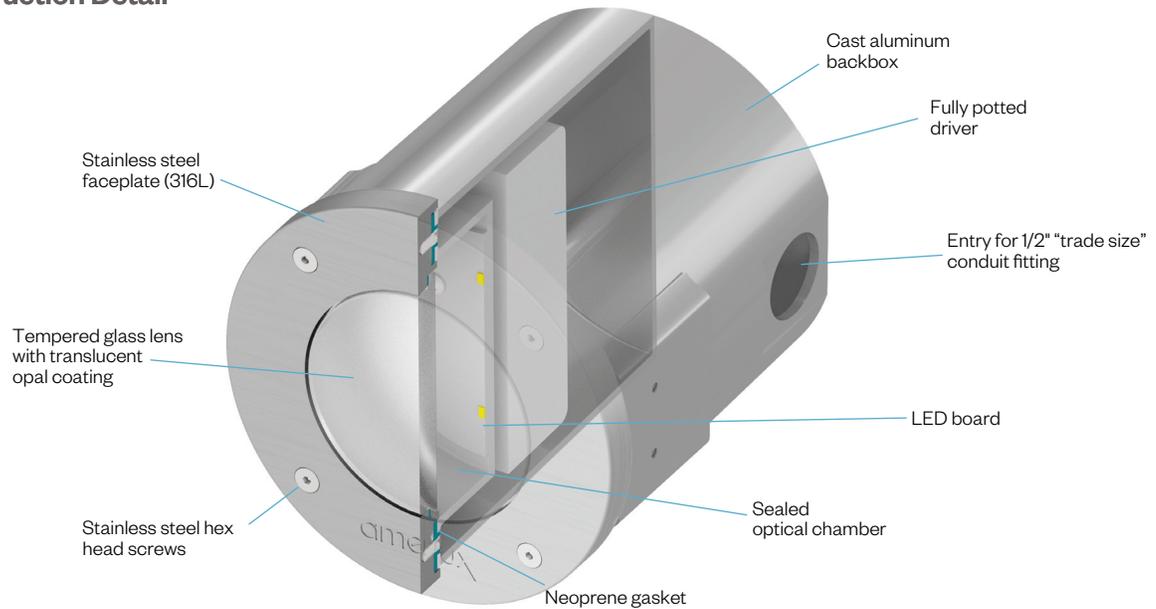

Application Brackets:


(Included with order)

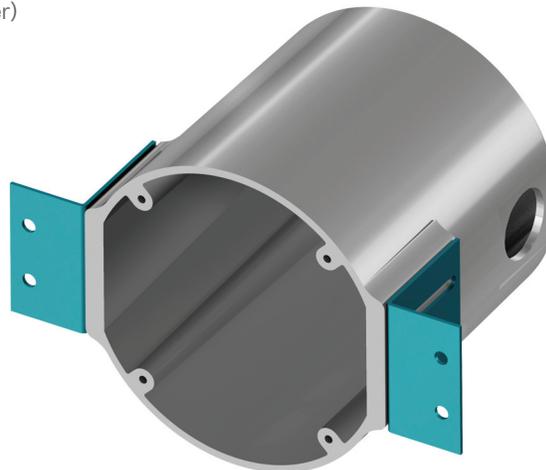

Horizontal Brackets
(Hollow Wall)

Performance Detail

PCSS4 POLAR GRAPH

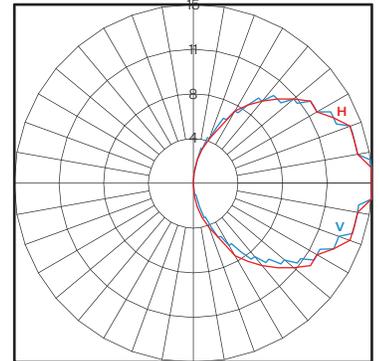

Ordering Information

Model Code	Performance Code	OCT	Approx. Lumens	Drive Current	Nominal Input Power
PCSS4	L27	2700 K	40	100mA	1.5W
	L30	3000 K	42		
	L40	4000 K	46		
PCSG4 (with guard)	H27	2700 K	70	175mA	2.7W
	H30	3000 K	74		
	H40	4000 K	81		

Ordering options shown as **BOLD**. Example: **PCSS4/L30**