


# Passo RT

## 12" Soft Glow LED Steplight

### Features

The Passo family of luminaires includes high quality, architecturally relevant fixtures suitable for use in both outdoor or indoor applications. All members of the Passo family feature an independently sealed optical chamber and fully potted driver. These features are especially beneficial in exterior applications as they help compensate for the challenges in getting a good seal between a pre-installed back box and the faceplate as well as those challenges in fully sealing the conduit system. Each luminaire is available in a choice of two output levels to help tailor the desired illuminance to the project and a standard 0-10v dimmable driver allows even further flexibility.

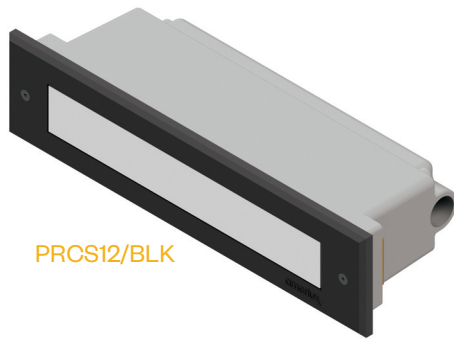


PRCS12/BLK

### Product Overview

Wattage:	Up to 4.5W
Lumen Output:	Up to 212 lm
Color Temp:	2,700K / 3,000K / 4,000K
Dimming:	0-10v down to 10%

### PROJECT:

### TYPE:



### Application:

Designed for new construction in brick, poured concrete, and hollow walls.

### Construction:

- Electrical grade PVC housing
- Internal optical chamber
- Cast aluminum faceplate
- 1/8" tempered opal glass lens

### Driver:

- Drive Current (175 or 350mA)
- 2.5kv surge protection
- Fully potted
- Input voltage 120v-277v auto-sensing
- 0-10v dimmable down to 10%

**ETL listed, suitable for wet locations.**

### Optics:

Individually sealed optical chamber insures LEDs are secure independent of the installation of the back box.

### Finish:

Premium quality thermoset polyester powdercoat for a durable finish.

- |                              |                          |
|------------------------------|--------------------------|
| <b>ANT</b> - Anthracite Gray | <b>BLK</b> - Satin Black |
| <b>CLB</b> - Classic Bronze  | <b>SLV</b> - Silver      |
| <b>WHT</b> - White           | <b>CSTM</b> - Custom     |



PRCS12



# Passo RT


Soft Glow LED Steplight



PROJECT:


TYPE:

## Construction Detail

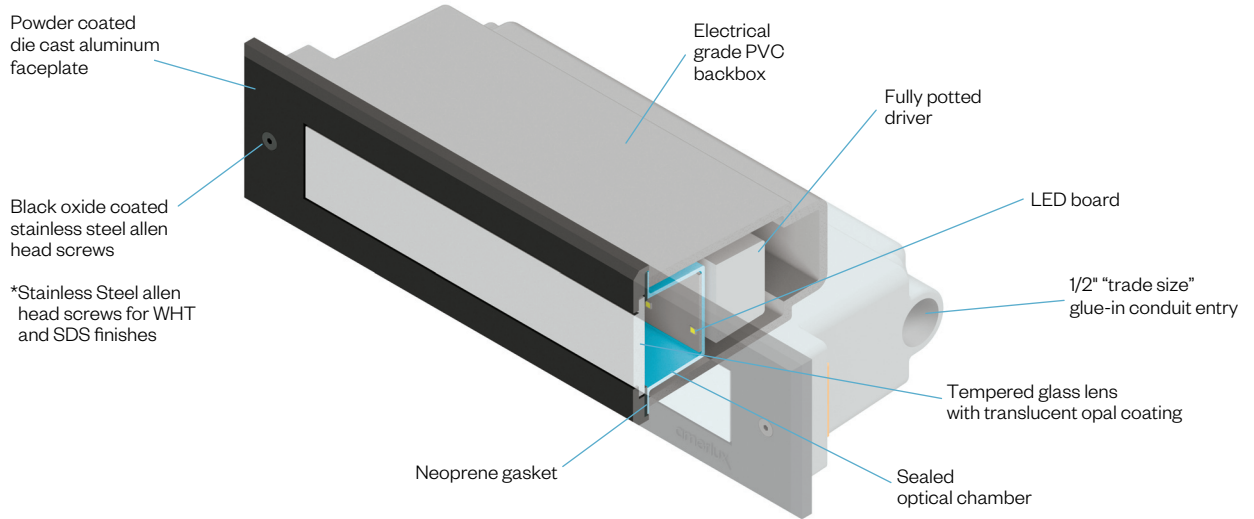


## Application Brackets:

(Included with order)

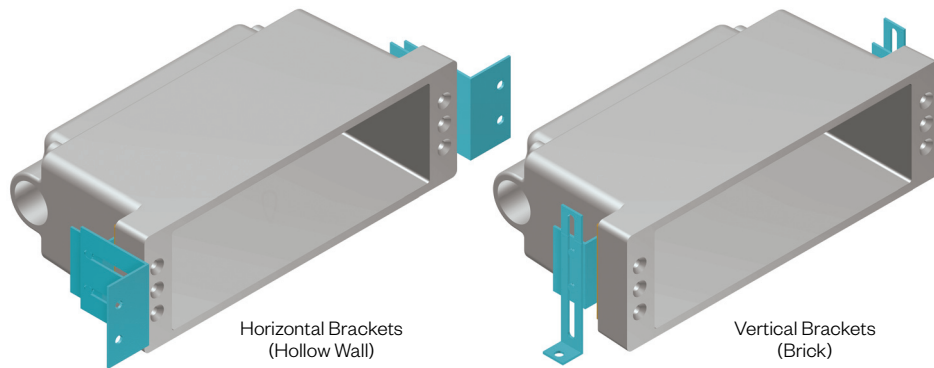

## Performance Detail

PSCS12/L30 POLAR GRAPH

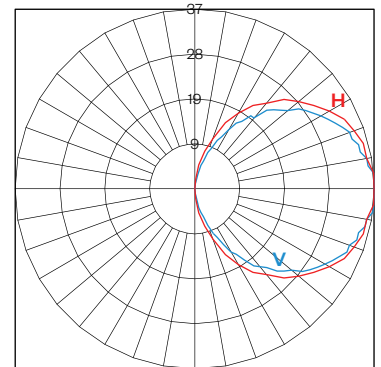

## Ordering Information

Model Code	Performance Code	CCT	Approx. Lumens	Nominal Input Power	Finish Code
<b>PRCS12</b>	<b>L27</b>	2700 K	98	3W	<b>ANT</b> <b>BLK</b> <b>CLB</b> <b>SLV</b> <b>WHT</b> <b>CSTM</b>
	<b>L30</b>	3000 K	103		
	<b>L40</b>	4000 K	110		
	<b>H27</b>	2700 K	190	4.5W	
	<b>H30</b>	3000 K	199		
	<b>H40</b>	4000 K	212		

Ordering options shown as BOLD. Example: PRCD12/L30/ANT