


Passo

12" LED STEPLIGHT

(Retrofit)

PSLT12R/BK

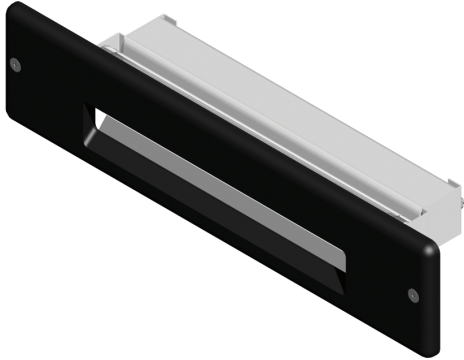

Features




Thoughtful design and attention to detail ensure the Passo LED Step Lights are truly one of a kind. Whether for new construction or retrofit applications, the Passo integrates LED technology and well proven construction techniques to deliver an extremely long lasting and virtually maintenance free light that enhances the safety and aesthetics of a project.

Product Overview

Wattage:	8W
Lumen Output:	205 lm
Color Temp:	3,000K / 3,500K / 4,000K

PROJECT:

TYPE:

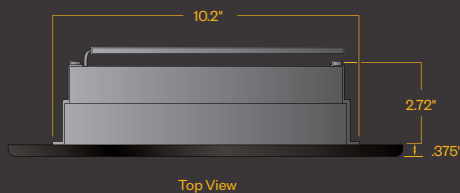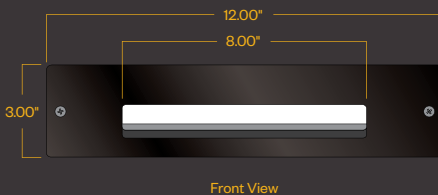

Application:

Designed for retrofit in steps and wall-mounted applications.

Construction:

Stainless steel driver enclosure and bracketing. Machined brass internal endcaps for optical chamber. Anodized aluminum heatsink. Composite, cast aluminum, or stainless steel faceplate.

Driver:

Fully epoxy encapsulated for exceptionally cool operation and greatly extended life. Electronic constant voltage operation with over voltage and short circuit protection. 120 to 277v input. ELV dimmable at 120v only.

ETL listed, suitable for wet locations.

Optics:

(2) LED module comprised of a closely packed array of small, discrete LED's that creates a uniform linear light source. Module and heat sink are enclosed in a cylindrical glass lens sealed with O-rings, to provide exceptional performance. Polished reflector directs the light outward uniformly.

Faceplate Color:

- BG** - Beige
- BK** - Black
- GY** - Dark Gray
- WH** - White

Brushed Stainless Steel

Passo

12" LED Steplight (Retrofit)





PROJECT:

TYPE:

Available Faceplates




Solid Color Composite
(Standard)

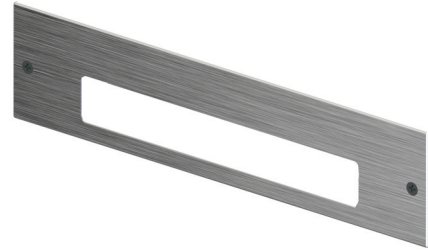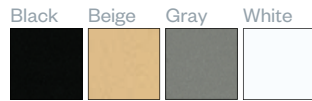


Stainless Steel (**SS**)
1/8" thick
304 Grade

Construction Detail

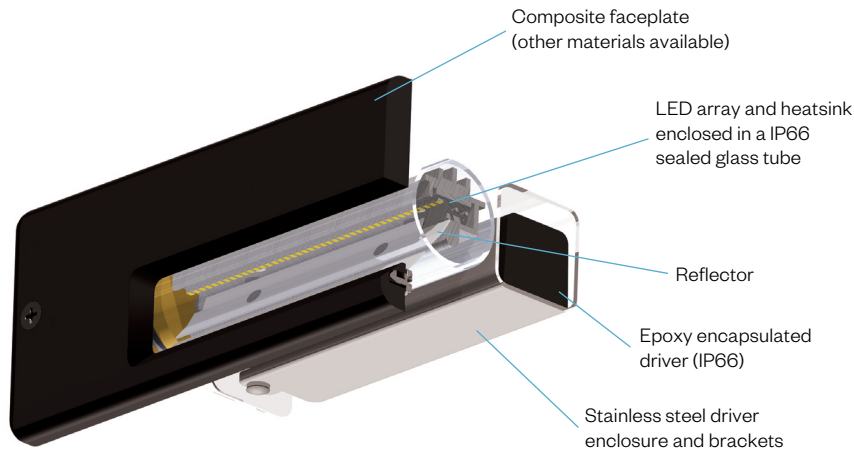

Performance Detail

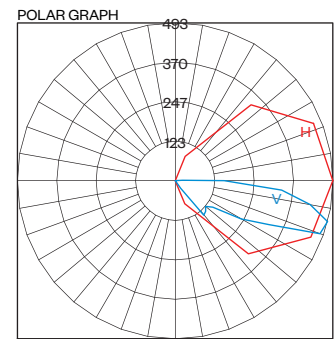

Maximum Candela = 493.36
Horizontal Angle = 0
Vertical Angle = 75

Ordering Information

Model	Faceplate Color	Ordering Code	CCT	Approx. Lumens	Total Efficacy	Nominal Input Power
PSLTR12	BG - Beige	2F30	3000 K	344	86 Lm/W	8W
	BK - Black		3500 K	352	88 Lm/W	
	GY - Dark Gray					
WH - White						
PSLTR12-SS	Brushed Stainless Steel	2F40	4000 K	410	102 Lm/W	

Ordering options shown as **BOLD**