




5220 Shank Road, Pearland, TX 77581  
T: 281.997.5400 | F: 281.997.5441  
[amerluxexterior.com](http://amerluxexterior.com)

**Headquarters**  
23 Daniel Road East, Fairfield, NJ 07004  
T: 973.882.5010 | F: 973.882.2605  
[amerlux.com](http://amerlux.com) | [amerluxexterior.com](http://amerluxexterior.com)  
© 2012 Amerlux, LLC

Oxidated Carpark 2nd Floor  
No. 124 Donghuan Road, Donghuan Jie  
Panyu, Guangzhou 511400 PRC  
[amerlux.com](http://amerlux.com)

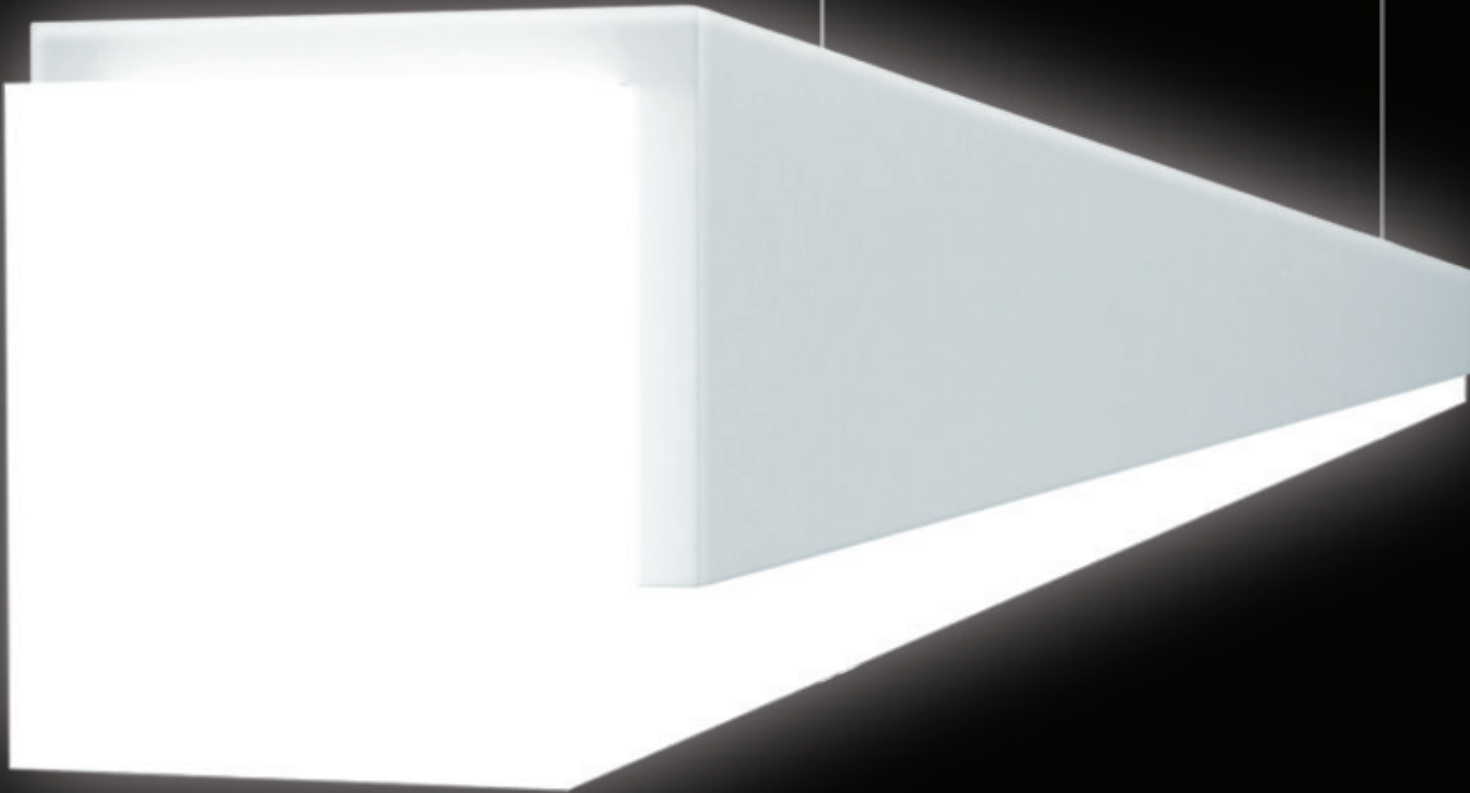


Quintetta



# Quintetta

## Elegant. Clean. LED.

Clean. Chiseled. LED. This signature 5-sided linear pendant sets the mood for hotel/corporate lobbies, reception areas, and conference rooms. Lit ends and sides glow softly with crisp white color. Powered with ultra thin low voltage suspension cable, Quintetta is clean and aesthetically balanced.

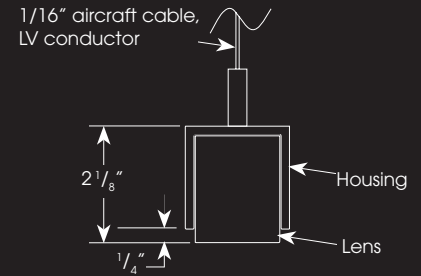

### Quintetta

#### Features:

- Extruded aluminum housings
- Extruded individual white acrylic lens (no hardware needed)
  - Evenly illuminated lens, extends beyond housing
  - No visible LED
- Low voltage (24v) power through aircraft cable
- White, Black, or Silver painted finish
- 50,000 hours of life (at 70% light output)

#### Specs:


- 5w/ft
- Delivers up to 188 lm/ft
- 80CRI
- 2700K, 3000K, 3500K, 4000K
- Multi-voltage 120v or 277v, constant current
- 0-10v dimming
- For indoor use only



**10** year limited warranty  
AMERLUX LED

### Ordering Guide

Model	Mounting	Wattage per foot	Lamp Type	Driver	Finish	Voltage
QNT	APW4 - powered aircraft cable with white canopy 4' cable	5	LED	E - electronic	HW - high reflectance white B - black S - silver	120
	APW8 - powered aircraft cable with white canopy, 8' cable					277
Example	QNT-APW4-5-LED-E-W-120-4-3500-DIM					

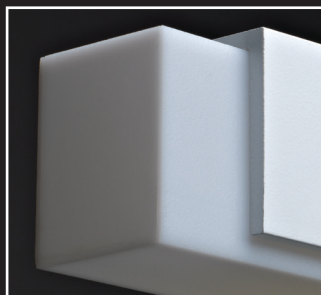

Extruded white acrylic lens



Powered suspension cable  
(1/16" DIA. aircraft cable)



Extruded aluminum housing



Lit ends free from shadow

**Length**

**Color Temp**

**Options**

3-3' nominal  
4-4' nominal  
5-5' nominal  
6-6' nominal  
7-7' nominal  
8-8' nominal

2700  
3000  
3500  
4000

**DIM** - 0-10v dimming