

GLOBAL TRACK SINGLE CIRCUIT 120V

GES
1 CIR 120V

APPLICATION:

Power supply for Amerlux track lighting fixtures

LABELING:

cUL listed

CONSTRUCTION:

Architectural grade, extruded aluminum housing
Milled grounding bar provides continuous ground contact
Continuously crimped conductor ensures mechanical strength and electrical reliability
Black, white or natural aluminum

MOUNTING:



Surface mount only, max. 4' O.C. suspension points



PROJECT:

TYPE:

GES Track Components

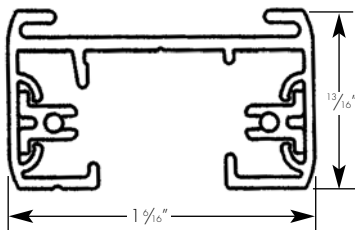

ELECTRICAL

Single circuit, 120v track
20 amp max.

Amerlux reserves the right to change details that do not affect overall function and performance.

Accessories not shown:
GES67 - floating canopy feed
677-0801 - T-bar ceiling clip



ORDERING INFORMATION:

TRACK Model	Finish	COMPONENTS* Model	Finish
GES204 (44")	1 - natural aluminum	GES11 - live end	1 - gray
GES208 (92")	2 - black	GES13 - conduit end	2 - black
GES212 (140")	3 - white	GES14 - center feed	3 - white
		GES15 - outlet box cover	
		GES17 - T-bar feed kit	
		GES21 - straight connector	
		GES23 - flex connector	
		GES34 - L connector, adjustable universal polarity	
		GES38 - X connector	
		GES40 - T connector, adjustable universal polarity	
		GES41 - dead end	
		GES67 - floating canopy feed	
		GES70 - monopoint	
		677-0801 - T-bar ceiling clip	

Track Example: GES204-2
Component Example: GES11-2

Cat #:

*Components ordered separately

GLOBAL TRACK SINGLE CIRCUIT 120V


GES
1 CIR 120V



TYPE :



GES TRACK CONFIGURATION AND COMPONENTS

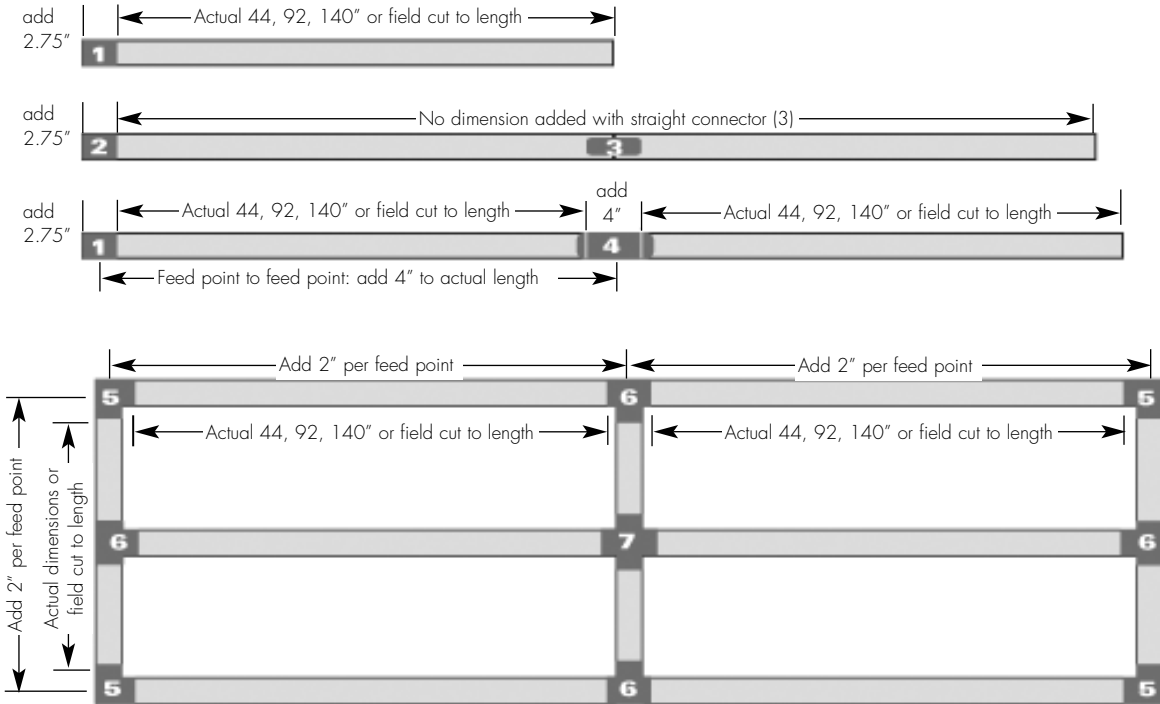

1. Live End Feed
GES 11



2. Conduit End Feed
GES 13



3. Straight Connector
GES 21




4. Center Feed
GES 14




5. L-Connector
GES 34




6. T-Connector
GES 40



7. X-Connector
GES 38



T-GRID SUSPENSION

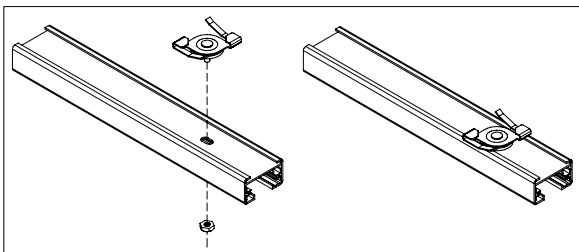

AIRCRAFT CABLE SUSPENSION

