GLOBAL TRACK 3 CIRCUIT 120V

XTS
3CIR 120V

PROJECT:

TYPE:

APPLICATION:
Power supply for Amerlux track lighting fixtures

CONSTRUCTION:
Architectural grade, extruded aluminum housing
Milled grounding bar provides continuous ground contact
Continuously crimped conductor ensures mechanical strength and electrical reliability
Black, white or natural aluminum

MOUNTING:
T-Grid, threaded rod or aircraft cable suspension
Max. 6' O.C. suspension points

LABELING:
UL and CUL listed

ELECTRICAL
3 circuit, 120v track
20 amps per circuit

Amerlux reserves the right to change details that do not affect overall function and performance.

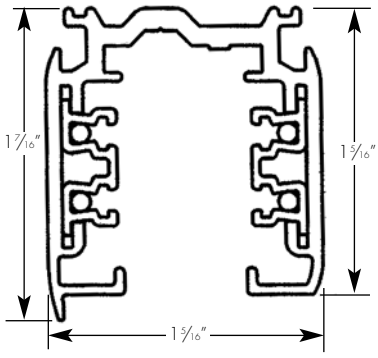

AMERLUX®
LIGHTING SOLUTIONS
ADAPT. ABILITY.™

ORDERING INFORMATION:

TRACK Model	Finish
XTS44 4' (48")	1 - natural aluminum
XTS48 8' (96")	2 - black
XTS412 12' (144")	3 - white

COMPONENTS* Model		Finish
XTS11 - live end, left	XTS40 - T connector, adjustable left polarity	1 - silver
XTS12 - live end, right	TEK41 - dead end	2 - black
XTS14 - live center feed	HW-0171K - T-bar clip	3 - white
XTS21 - straight connector	HW-0068 - cable gripper	
XTS23 - flexible connector	CA-0005 - aircraft cable 20'	
XTS34 - L connector, adjustable universal polarity	CO-0094K - J-box cover	
XTS38 - X connector	SKB12-1 - ceiling clamp (for cable and rod mounting, aluminum finish only)	
XTS39 - T connector, adjustable right polarity	XTSV12 - bending tool**	
	MONO - monopoint kit (-B - black, -W - white)	

Track Example: XTS44-2
Component Example: XTS11-2

Cat #:

*Components ordered separately
**Bending tool bends conductors to proper angle when track is field cut

Amerlux, LLC. • 23 Daniel Road East, Fairfield NJ 07004 • T: 973 882 5010 F: 973 882 2605 • www.amerlux.com

GLOBAL TRACK 3 CIRCUIT 120V

XTS
3CIR 120V

AMERLUX LIGHTING SOLUTIONS
ADAPT. ABILITY.™

TYPE:



XTS TRACK COMPONENTS



XTS 11 Live End (left) -standard
XTS 12 Live End (right)
(Used for Conduit feed also)



XTS 14 Live Center Feed

XTS 21 Straight Connector

XTS 34 L Connector
(adjustable universal polarity)



XTS 38 X Connector



XTS 39 T Connector (adjustable right polarity)
XTS 40 T Connector (adjustable left polarity)



XTS 23 Flex Connector



Monopoint Kit:
Mono-B (black)
Mono-W (white)

XTS 41 Dead End

ADDITIONAL ACCESSORIES NOT PICTURED:

CO-0094K - Cover Plate for J box
SKB12-1 - Ceiling Clamp
HW-0171K - T-Bar Clip
XTSV12 - Bending Tool
HW-0068 - Cable Gripper
CA-0005 - A/C Cable 20'

SUSPENSION OPTIONS

T-GRID SUSPENSION

1 Attach T-Bar clip to SKB12-1



2 Assemble T-Bar clip to T-Bar

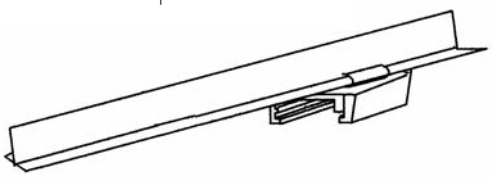

3 Tighten SKB12-1 to track

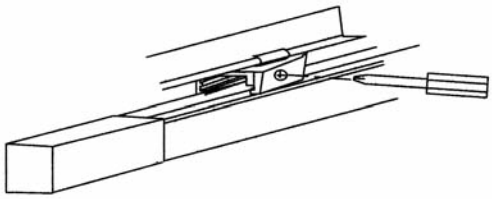
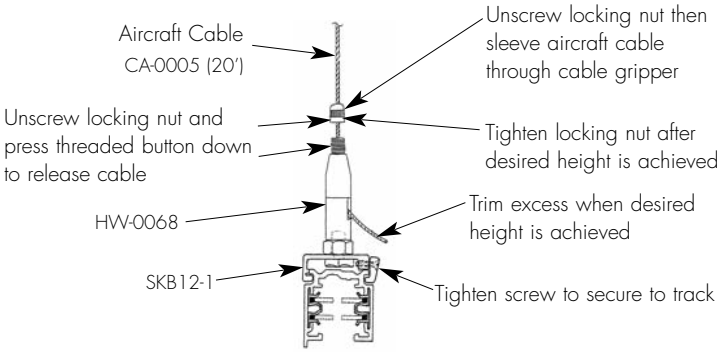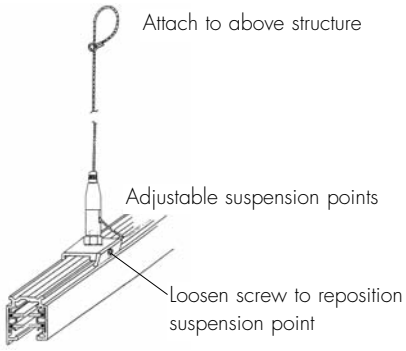
AIRCRAFT CABLE SUSPENSION