

4" DIAMETER TUBE T5 FLUORESCENT

AR4
T5

APPLICATIONS:

Supermarket, retail and commercial ambient, task or accent lighting

MOUNTING:

Aircraft cable suspension, stem mount or wall mount

CONSTRUCTION:

Extruded aluminum housing
Die-cast connectors for straight runs or patterns
Powder coat paint, available in over 200 finishes

LABELING:




OPTICS:

T5 fluorescent lamps
Acrylic lens or radial blade louver
Full rotation capability at time of installation for direct/indirect option

PROJECT:

TYPE:

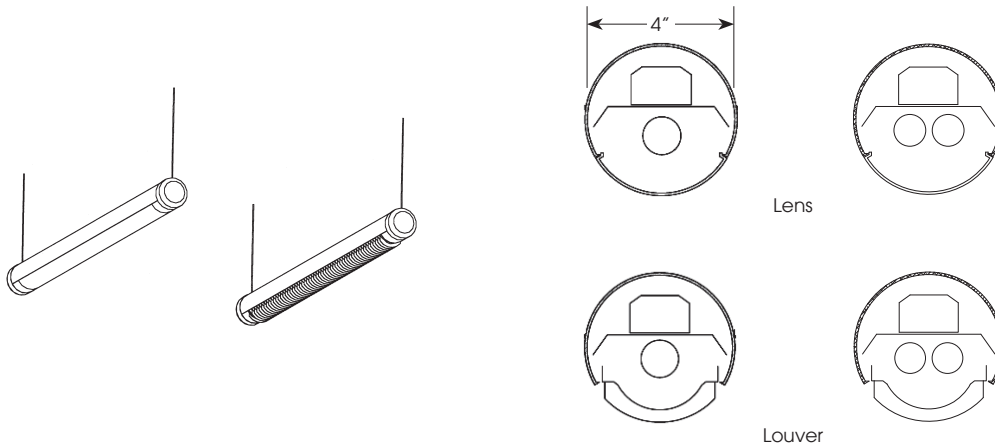

ELECTRICAL

Electronic HPF ballast
120v or 277v

ORDERING INFORMATION:

Model	Light Dist./ Shielding	Mounting	# Lamps	Wattage	Lamp Type	Finish	Length	Voltage	Options
AR4	LD - lens direct	A - a/c cable, black spiral feed	1	28	T5	W - white	4 - 48"	120	DIM - dimming ballast (HO only) 2LE - 2 level switching EM - emergency battery pack
	LU - lens indirect	3 wire	2			B - black	8 - 96"	277	
	RD - louver direct	ASB - a/c cable, black straight		54	T5HO	_____ (other RaL)	PAT - pattern		
	OD - open direct	feed 3 wire							
	OU - open indirect	ASW - a/c cable, white straight							
	B - blank	feed 3 wire							
		AW3 - a/c cable, white spiral							
		feed 3 wire							
		AW5 - a/c cable, white spiral							
		feed 5 wire							
	W - wall mount w/arm bracket								
	SR - rigid stem								
	SS - swivel stem								

Example: AR4-LD-A-1-28-T5-W-4-120

Cat #:

Amerlux reserves the right to change details that do not affect overall function and performance.

4" DIAMETER TUBE T5 FLUORESCENT













AR4
T5

amerlux
GLOBAL LIGHTING SOLUTIONS

TYPE:




4" DIAMETER CONNECTOR DETAILS:

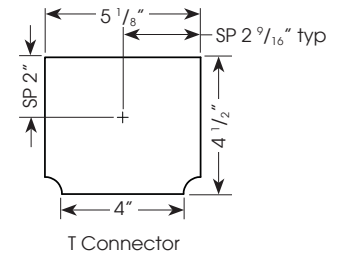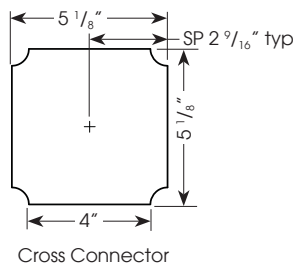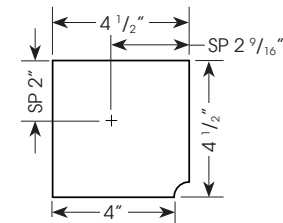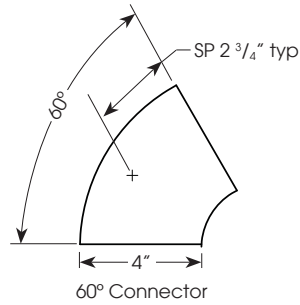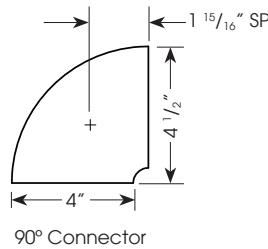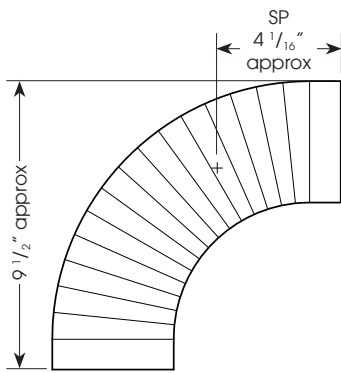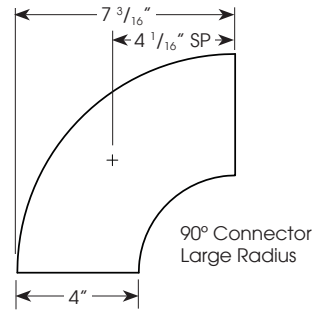


WALL BRACKET DETAILS:


SIDE VIEW



End Wall Bracket



Thru Wall Bracket

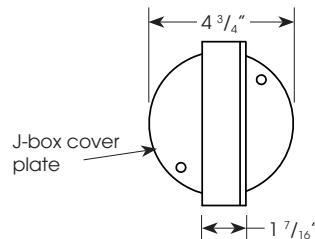

FRONT VIEW

