

4" DIAMETER TUBE T8 FLUORESCENT

AR4
T8



PROJECT:

TYPE:

APPLICATION:

Supermarket, retail and commercial ambient, task or accent lighting

MOUNTING:

Aircraft cable suspension, stem mount or wall mount

CONSTRUCTION:


Extruded aluminum housing
Die-cast connectors for straight runs or patterns
Powder coat paint, available in over 200 finishes
Track section uses 3 circuit 120v track
(consult factory)

LABELING:

UL and CUL listed

OPTICS:

T8 fluorescent lamps
Acrylic lens or radial blade louver
Full rotation capability at time of installation for direct option

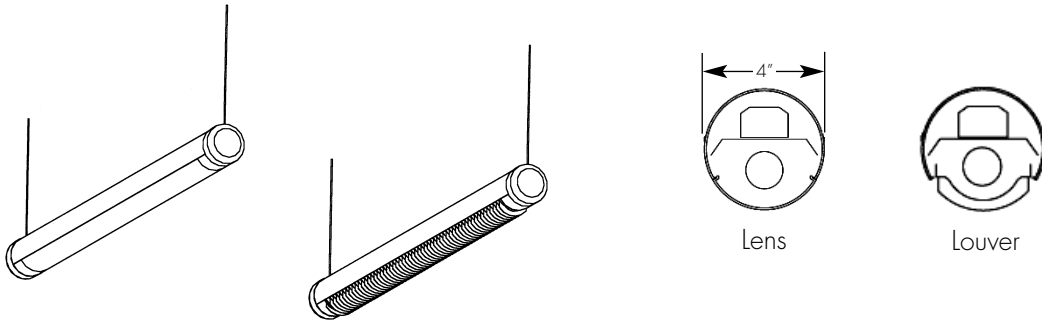

ELECTRICAL

Electronic HPF ballast
120v or 277v

Amerlux reserves the right to change details that do not affect overall function and performance.



ORDERING INFORMATION:

Model #	Light Dist./ Shielding*	Mounting*	# Lamps*	Wattage	Lamp Type	Finish	Length	Voltage	Options
AR4	LD	A	1	32	T8	W - white	4 - 50"	120	DIM - dimming ballast (HO only) 2LE - 2 level switching
	LU	ASB	2			B - black	8 - 99"	277	
	RD	ASW				-	PAT - pattern		
	OD	AW3				-			
	OU	AW5				-			
		W				-			
		T				-			
		SR				-			
		SS				-			

Example: AR4LD-A-1-32-T8-W-4-120-DIM

Cat #:

*See reverse side for description

4" DIAMETER TUBE T8 FLUORESCENT


AR4
T8




TYPE :



4" DIAMETER CONNECTOR DETAILS

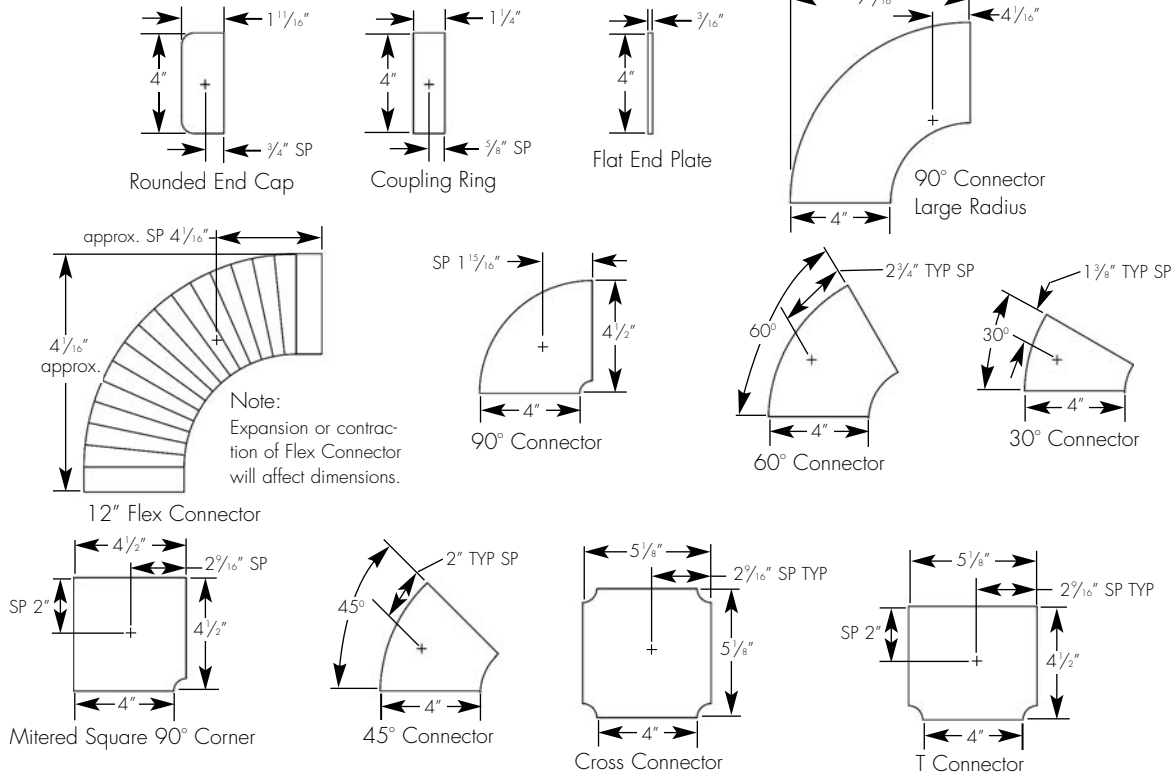

WALL BRACKET DETAILS

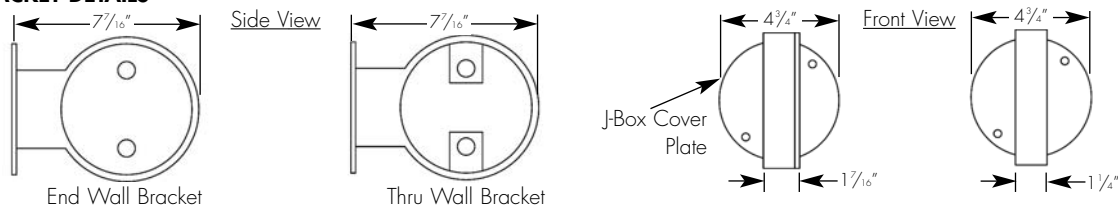

LINEAR SYSTEMS REFERENCE GUIDE

LIGHT DIRECTION/SHIELDING:

LD - lens direct
 RD - louver direct
 OD - open direct
 LU - lens indirect
 RU - louver indirect
 OU - open indirect
 LT - lens indirect, track direct
 LL - lens indirect, lens direct
 LR - lens indirect, louver direct
 RL - louver indirect, lens direct
 RR - louver indirect, louver direct
 T - track only
 B - blank only
 SLD - straight blade louver direct
 LSLD - lens/straight blade louver combo direct
 PBL (S) - parabolic louver specular
 PBL (SS) - parabolic louver semi-specular
 LPBL (S) - lens, parabolic louver specular
 LPBL (SS) - lens, parabolic louver semi-specular

MOUNTING:

A - aircraft cable with black spiral feed (3 wire)
 ASB - aircraft cable with black straight feed (3 wire)
 ASV - aircraft cable with white straight feed (3 wire)
 AW3 - aircraft cable with white spiral feed (3 wire)
 AW5 - aircraft cable with white spiral feed (5 wire)
 VW - wall mount with arm bracket
 VWRB - wall mount with rear wall bracket (6x6 only)
 T - take up wall connector from end mount (2.5", 4" & 6" only)
 SR - rigid stem
 SS - swivel stem

LAMPS PER CROSS SECTION:

1 - 1 lamp
 2 - 2 lamp
 3 - 3 lamp
 1/1 - 1 up, 1 down
 1/2 - 1 up, 2 down
 1/3 - 1 up, 3 down
 2/1 - 2 up, 1 down
 2/2 - 2 up, 2 down
 2/3 - 2 up, 3 down
 3/2 - 3 up, 2 down
 3/3 - 3 up, 3 down
 1/T - 1 up, track down
 2/T - 2 up, track down
 3/T - 3 up, track down