

6" DIAMETER TUBE T5 FLUORESCENT

AR6
T5



PROJECT:

TYPE:

APPLICATION:

Supermarket, retail and commercial ambient, task or accent lighting

CONSTRUCTION:

Extruded aluminum housing
Die-cast connectors for straight runs or patterns
Powder coat paint, available in over 200 finishes
Track section uses Global 1, 2 or 3 circuit track systems (consult factory)

OPTICS:


T5 fluorescent lamps
Acrylic lens or radial blade louver
Full rotation capability at time of installation for direct/indirect option

MOUNTING:

Aircraft cable suspension, stem mount or wall mount

LABELING:

cUL listed

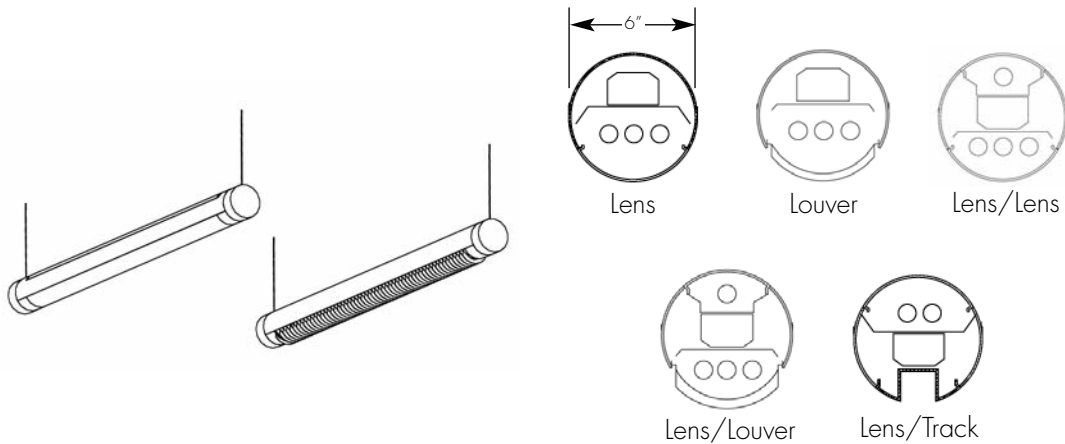

ELECTRICAL

Electronic HPF ballast
120v or 277v

Amerlux reserves the right to change details that do not affect overall function and performance.



ORDERING INFORMATION:

Model #	Light Dist./ Shielding*	Mounting*	# Lamps*	Wattage	Lamp Type	Finish	Length	Voltage	Options
AR6	LD	A	1	28	T5	W - white	4 - 48"	120	DIM - dimming ballast (HO only) 2LE - 2 level switching EM - emergency battery pack
	LU	ASB	2			B - black	8 - 96"	277	
	RD	ASW	3	54	T5 HO	-	PAT - pattern		
	OD	AV3	1/1			-			
	OU	AV5	1/2			[other RAL]			
	LL	W	1/3						
	LR	T	2/2						
	LT	SR	2/3						
	T	SS	3/3						
	B		1/T						
			2/T						
			3/T						

Example: AR6-LD-A-1-54-T5HO-W-4-120-2LE

Cat #:

*See reverse side for description

6" DIAMETER TUBE T5 FLUORESCENT








AR 6
T5







TYPE :



6" DIAMETER CONNECTOR DETAILS

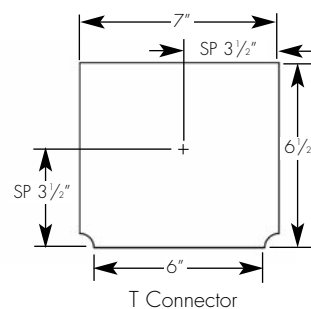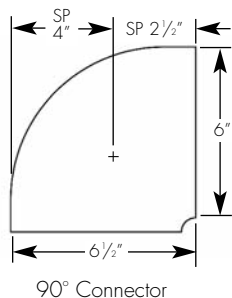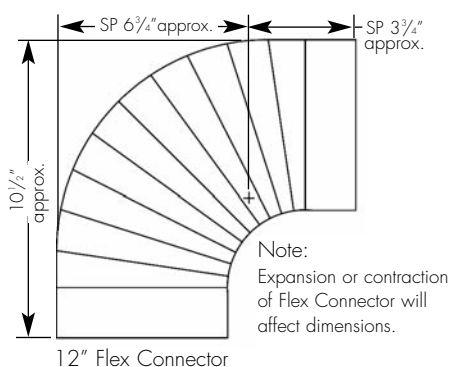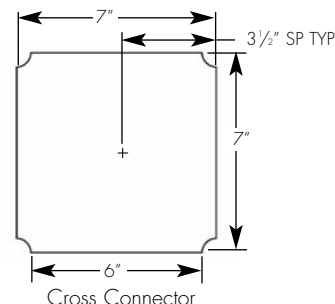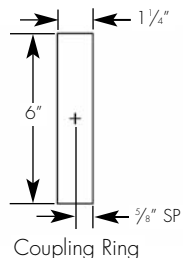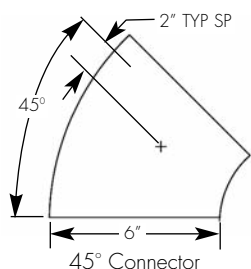

WALL BRACKET DETAILS

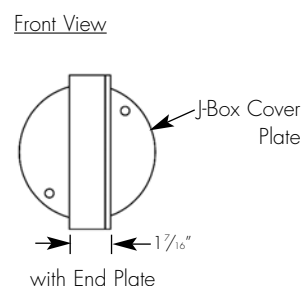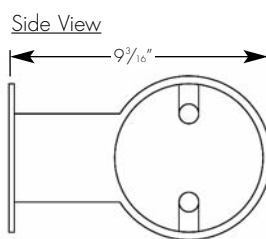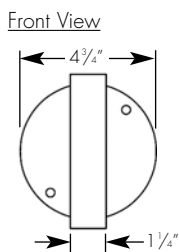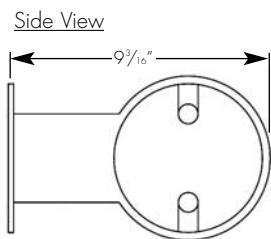

ORDERING OPTION DESCRIPTIONS

LIGHT DISTRIBUTION/SHIELDING:

- LD - lens direct
- RD - louver direct
- OD - open direct
- LU - lens indirect
- OU - open indirect
- LT - lens indirect, track direct
- LL - lens indirect, lens direct
- LR - lens indirect, louver direct
- T - track only
- B - blank only

MOUNTING:

- A - aircraft cable with black spiral feed (3 wire)
- ASB - aircraft cable with black straight feed (3 wire)
- ASW - aircraft cable with white straight feed (3 wire)
- AW3 - aircraft cable with white spiral feed (3 wire)
- AW5 - aircraft cable with white spiral feed (5 wire)
- W - wall mount with arm bracket
- T - take up wall connector for end mount (2.5", 4" & 6" only)
- SR - rigid stem
- SS - swivel stem

LAMPS PER CROSS SECTION:

- 1 - 1 lamp
- 2 - 2 lamp
- 3 - 3 lamp
- 1/1 - 1 up, 1 down
- 1/2 - 1 up, 2 down
- 1/3 - 1 up, 3 down
- 1/T - 1 up, track down
- 2/T - 2 up, track down
- 3/T - 3 up, track down