

# EVOKE 2.9 ROUND PINHOLE ADJUSTABLE

**E2.9RPA**  
**PAR20MH**

**APPLICATION:**

Commercial and retail accent and display lighting

**HOUSING CONSTRUCTION:**

20 ga. steel painted matte black  
Formed aperture plate with 5/8" lip (GB-standard)  
Integral adjustable locking mounting bars  
Thermally protected  
Medium base pulse rated socket

**REFLECTOR CONSTRUCTION:**

Die-cast aluminum faceplate painted matte white  
Die-cast knife edge baffle painted matte black  
Spring steel mounting clips

**LAMPING:**

PAR20MH medium base, 20w and 39w

**OPTICS:**

Cam adjustment mechanism provides lockable 0-35° tilt; 360°+ rotation  
Formed steel lamp holder

**MOUNTING:**



Specify ceiling mounting:  
GRID: 1" deep aperture collar  
GB (Gyp. Board): 5/8" deep aperture collar  
Extra thick ceiling ring available for ceilings over 1" thick, consult factory  
Note: Tilt adjustment reduced to 30° in ceilings 1 1/4" thick

**LABELING:**

cUL listed  
Damp location



PROJECT:  
  
TYPE:

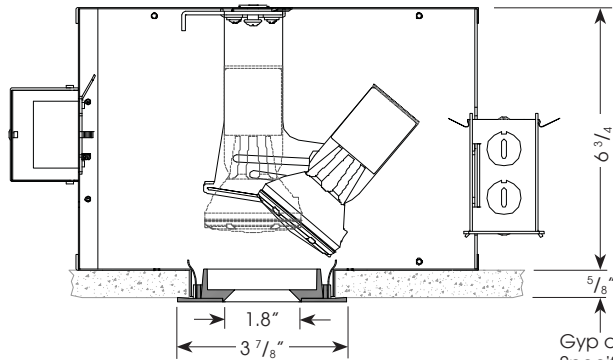

Ceiling Cut Out Dimension: 3 7/8" dia.

Gyp ceiling shown. Specify GRID for 1" deep aperture collar.

**ELECTRICAL**

Ballast	Lamping			
	20w		39w	
	Input Watts	Input Amps*	Input Watts	Input Amps*
Electronic 120v	24	.20	45	.40
277v	22	.09	44	.16

\*data is for open circuit current  
PAR20MH medium base, 20w and 39w  
**Electronic ballast**

**ORDERING INFORMATION:**

Amerlux reserves the right to change details that do not affect overall function and performance.

Housing Model	Wattage	Lamp Type	Voltage	Ceiling Mounting	Reflector Model	Aperture Finish	Accessories Ordered Separately
E2.9RAX	20 39	PAR20MH	120 277	GB - 5/8" deep collar GRID - 1" deep collar - (other, consult factory)	E2.9RPA	Faceplate with back baffle MW - matte white	Consult Factory

Complete Unit Specification: E2.9RAX-39-PAR20MH-120-GB/E2.9RPA-SDW  
Housing Only: E2.9RAX-39-PAR20MH-120-GB  
Reflector Only: E2.9RPA-MW

Cat #: