

# EVOKE 2.9" ROUND PINHOLE ADJUSTABLE TRIMLESS

E2.9RPATL  
CMHMR16

## APPLICATION:

Commercial and retail accent and display lighting

## HOUSING CONSTRUCTION:

20 ga. steel painted matte black  
Formed aperture plate with 5/8" lip  
Cast aluminum plaster frame w/perforated face  
Integral adjustable locking mounting bars  
Thermally protected  
GX10 TAL pulse rated socket

## OPTICS:

Cam adjustment mechanism provides lockable 0-25° tilt; 360°+ rotation  
Spun aluminum lamp holder with spring steel retaining clip, snaps in/out for easy relamping  
Accepts up to 2 accessories

## REFLECTOR CONSTRUCTION:

Die-cast aluminum faceplate painted matte white  
Die-cast knife edge baffle painted matte black  
Spring steel mounting clips

## MOUNTING:

For use in sheet rock ceiling  
Max. ceiling thickness - 1"

## LABELING:

cUL listed  
Damp location

## LAMPING:

CMHMR16, GX10 base, 20w and 39w




PROJECT:

TYPE:

**ECOTEKTURAL**

Architectural lighting for sustainable design.

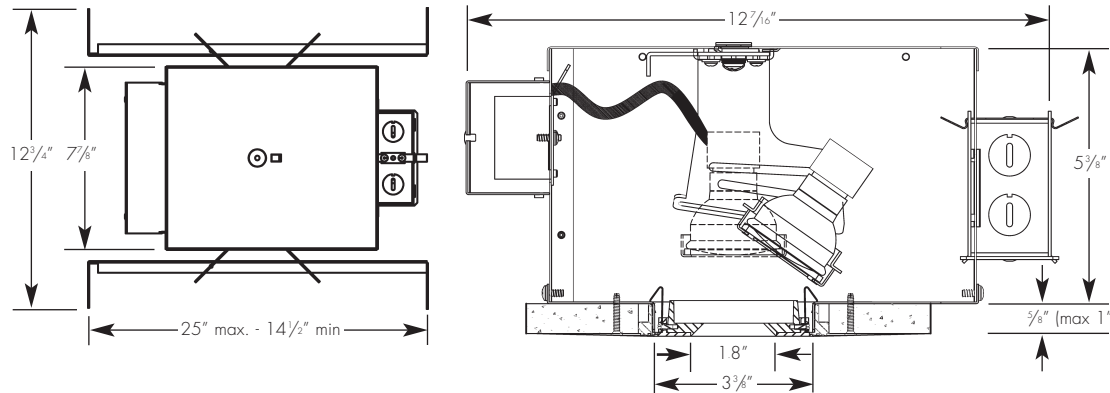

## ELECTRICAL


Ballast	Input volts	Lamping		Input volts	Amps*
		20w	39w		
Electronic	120v	24	.20	45	.40
	277v	22	.09	44	.16

\*Data is for open circuit current

CMHMR16, GX10 base metal halide, 20w and 39w

### Electronic ballast

Amerlux reserves the right to change details that do not affect overall function and performance.



1. Reflector Trim
2. Fixture Housing Aperture Plate
3. Ceiling 5/8" (1" Max.)
4. Cast Aluminum Plaster Frame
5. Plaster Skim Coat (By Others)
6. 6-32 Type F Thread Cutting Screw

## ORDERING INFORMATION:

HOUSING Model #	Wattage	Lamp Type	Voltage
E2.9RATL	20	CMHMR16	120
	39		277

REFLECTOR Model #	Aperture Finish
E2.9RPATL	Faceplate with black baffle MW - matte white

## ACCESSORIES Ordered Separately

HEX16 - hexcell louver  
SOL16 - beam softening lens  
SPR16 - linear spread lens (5°x55°)

Complete Unit Specification: E2.9RATL-20-CMHMR16-120/E2.9RPATL-MW

Housing Only: E2.9RATL-20-CMHMR16-120

Reflector Only: E2.9RPATL-MW

Cat #: