

EVOKE 2.9" ROUND PINHOLE ADJUSTABLE TRIMLESS

E2.9RPATL
PAR20 MH

APPLICATION:

Commercial and retail accent and display lighting

HOUSING CONSTRUCTION:

20 ga. steel painted matte black
Formed aperture plate with 5/8" lip
Cast aluminum plaster frame w/perforated face
Integral adjustable locking mounting bars
Thermally protected
Medium base pulse rated socket

OPTICS:

Cam adjustment mechanism provides lockable 0-35° tilt; 360°+ rotation
Formed steel lamp holder

REFLECTOR CONSTRUCTION:

Die-cast aluminum faceplate painted matte white
Die-cast knife edge baffle painted matte black
Spring steel mounting clips

MOUNTING:

For use in sheet rock ceiling
Max. ceiling thickness - 1"

LABELING:

cUL listed
Damp location


LAMPING:

PAR20MH medium base, 20w and 39w



PROJECT:

TYPE:

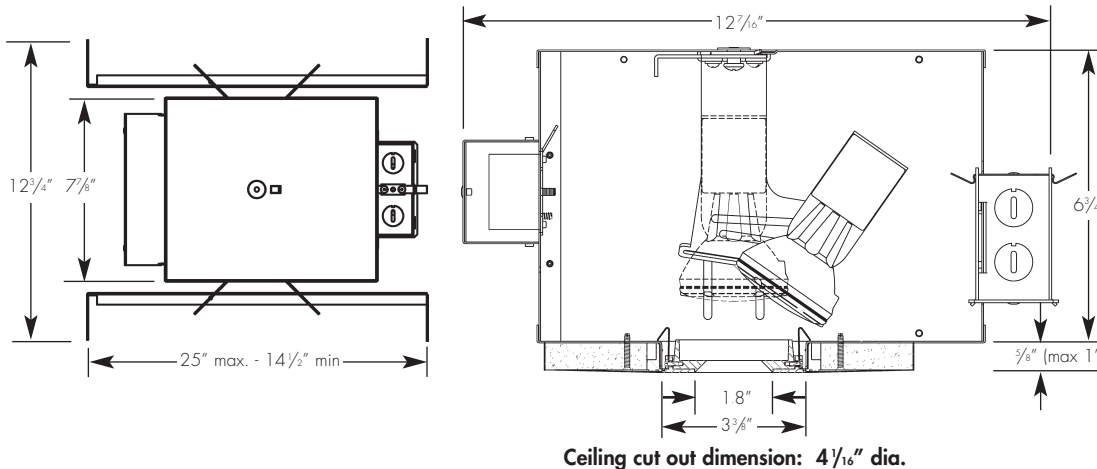

ELECTRICAL


Ballast	Input volts	Lamping		Input volts	Amps*
		20w	39w		
Electronic	120v	24	.20	45	.40
	277v	22	.09	44	.16

*Data is for open circuit current

PAR20MH medium base, 20w and 39w

Electronic ballast

Amerlux reserves the right to change details that do not affect overall function and performance.



1. Reflector Trim
2. Fixture Housing Aperture Plate
3. Ceiling 5/8" (1" Max.)
4. Cast Aluminum Plaster Frame
5. Plaster Skim Coat (By Others)
6. 6-32 Type F Thread Cutting Screw

ORDERING INFORMATION:

HOUSING				REFLECTOR		ACCESSORIES
Model #	Wattage	Lamp Type	Voltage	Model #	Aperture Finish	Ordered Separately
E2.9RAXTL	20	PAR20MH	120	E2.9RPATL	Faceplate with black baffle	Consult Factory
	39		277		MW - matte white	

Complete Unit Specification: E2.9RAXTL-39-PAR20MH-120/E2.9RPATL-MW

Housing Only: E2.9RAXTL-39-PAR20MH-120

Reflector Only: E2.9RPATL-MW

Cat #: