

# CYLINDRIX TRACK MINI WASH

**CYLT-MW**  
T4GU6.5

**APPLICATION**

Accent and display lighting for Retail, Commercial and Hospitality environments

**MOUNTING:**

Track and busway

**LABELING:**

cUL listed

**CONSTRUCTION:**

Die-cast lens holder, lamp and ballast housing  
Formed aluminum yoke  
GU6.5 TAL pulse rated socket  
Integral single pole on/off switch  
Powder coat paint

**LAMPING:**

CMH T4GU6.5 base, 15w (SYLVANIA METALARC® POWERBALL®), 20w and 39w




**OPTICS:**



0-90° tilt, 360° rotation  
Amerlux optics specifically designed for the CMH T4GU6.5 lamp  
Available in custom tints to tune beam to provide incandescent-like hue

PROJECT:

TYPE:



\*2" for 277v units

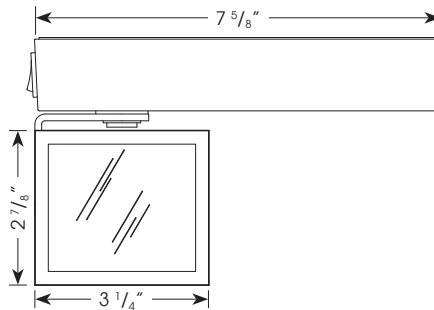

**ELECTRICAL**

Ballast	Input Voltage	Lamping					
		15w		20w		39w	
		Watts	Amps*	Watts	Amps*	Watts	Amps*
Electronic	120v	18	.15	24	.20	45	.40
	277v	18	.07	24	.10	45	.20

\*data is for open circuit current  
CMH T4GU6.5 base metal halide, 15w, 20w and 39

**ORDERING INFORMATION:**

Amerlux reserves the right to change details that do not affect overall function and performance.

Model	Wattage	Lamp Type	Ballast	Finish	Beam Spread	Voltage	Beam Spread	Options/Accessories
CYLT-MW	15 20 39	T4GU6.5	E - electronic	WT - white texture BT - black texture ST - silver texture NA - natural aluminum (brushed, clear coat) — (other RAL)	TS1 - 1 circuit, 120v Halo compatible TL1 - 1 circuit, 120v Lightolier compatible TJ1 - 1 circuit, 120v Juno compatible TN2 - Global 2cir/2neut, 277v B - busway	120 277	WW - wall wash	GOLD - ferric gold optic reflector DB2690 - DB2690 optic reflector

Example: CYLT-MW-20-T4GU6.5-E-WT-TS1-120-WW

Cat #: