

CYLINDRIX II VERTICAL TRACK

C2TV
T4GU6.5

APPLICATION:

Accent and display lighting for retail, commercial and hospitality environments

CONSTRUCTION:

Die-cast lens holder, lamp & ballast housing
GU6.5 TAL pulse rated socket
Integral single pole on/off switch for single circuit & busway adapters (no switch available on canopy mount)
No exposed wiring
Powder coat paint

OPTICS:

0-90° lockable tilt, 360° rotation
Amerlux optics specifically designed for the CMH T4GU6.5 lamp
Available in custom tints to tune beam to provide incandescent-like hue

MOUNTING:

Track, canopy and busway

LABELING:

cUL listed



LAMPING:

CMH T4GU6.5 base, 15w (SYLVANIA METALARC® POWERBALL®), 20w and 39w




PROJECT:

TYPE:

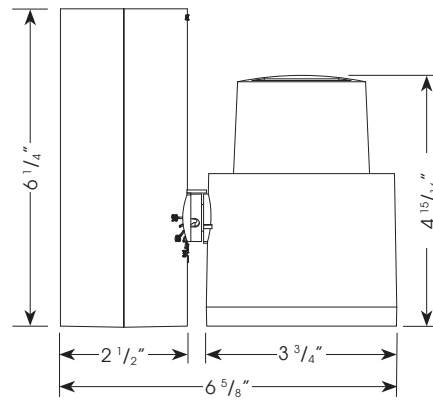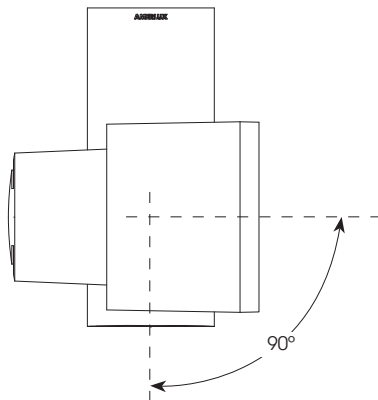

Bottom view



ELECTRICAL

Ballast	15w		Lamping 20w		39w	
	Input Watts	Amps*	Input Watts	Amps*	Input Watts	Amps*
Electronic 120v	18	.15	24	.20	45	.40
277v	18	.07	24	.10	45	.20

*data is for open circuit current
CMH T4GU6.5 base metal halide, 15w, 20w and 39

ORDERING INFORMATION:

Amerlux reserves the right to change details that do not affect overall function and performance.

Model	Wattage	Lamp Type	Ballast	Finish	Mounting	Voltage	Beam Spread	Options/Accessories
C2TV	15 20 39	T4GU6.5	E - electronic	WT - white texture BT - black texture ST - silver texture NA - natural aluminum (brushed, clear coat) - - (other RAL)	TN1 - Global 1cir, 120v TEK - Global 2cir/2neut, 120v TN3 - Global 3cir, 120v TN2 - Global 2cir/2neut, 277v B - busway C - canopy - - (other)	120 277	CL - spot, 12° NF - narrow flood, 18° FL - flood, 25° FL-UBP - flood ultra brite polish, 25° WF - wide flood, 40° SL - linear spread lens, 5° x 55°	GOLD - ferric gold optic reflector DB2690 - DB2690 optic reflector HEX - hexcell louver, 1/8" x 1/8" SN - snoot, specify length & finish, 3/4" standard CB - cross blade, specify color (BT), black standard

Example: C2TV-20-T4GU6.5-E-WT-TN1-120-NF

Cat #: