

CYLINDRIX TRACK

CYLT MR16

APPLICATION:

Accent and display lighting for Retail, Commercial and Hospitality environments

CONSTRUCTION:

Die-cast lamp and ballast housing
Formed aluminum yoke
Electronic transformer
GU5.3 bi-pin socket
Integral single pole on/off switch
Powder coat paint

OPTICS:

0-90° tilt, 360° rotation
MR16 bi-pin GU5.3, 50w max
Solite beam softening lens

MOUNTING:

Track and busway

LABELING:

cUL listed

ACCESSORIES:


Snoot: Spun aluminum 1/2" length standard
Painted finish

Cross Blade: Stamped steel painted black
Cross blade sits in snoot which must be ordered when using cross blade



PROJECT :

TYPE :

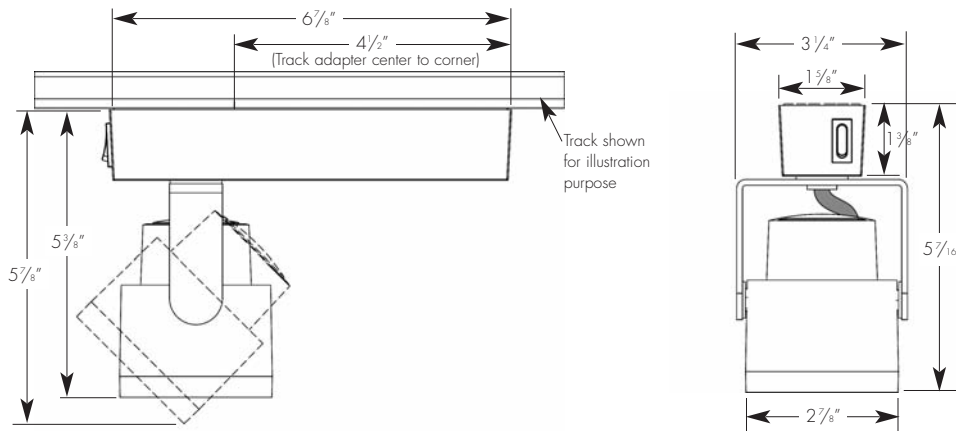

ELECTRICAL

Ballast	Lamping 50w	Input	
		watts	Amps
Electronic 120v		50	.42

MR16, GU5.3 bi-pin base, 50w max

Amerlux reserves the right to change details that do not affect overall function and performance.

ecotECTURAL
Architectural lighting for sustainable design.



ORDERING INFORMATION:

Model	Lamp Type	Ballast	Finish	Mounting	Voltage	Options/ Accessories
CYLT	MR16 (50w max)	E - electronic	WT - white texture BT - black texture ST - silver texture NA - natural (brushed, clear coated) _____ [other RAL]	TS1 - 1 circuit, Halo compatible TL1 - 1 circuit, Lightolier compatible TJ1 - 1 circuit, Juno compatible B - busway	120	HEX - hexcell louver SN - snoot (1/2" length standard), specify color (WT, BT, ST) CB - cross blade, specify color (BT), black standard

Example: CYLT-MR16-E-WT-TS1-120

Cat #: