

PARI ARCHITECTURAL ROUND PENDANT 2

METAL HALIDE

PARI-2R
T4GU6.5

APPLICATION:

Retail, hospitality and commercial task and decorative lighting

OPTICS:

Amerlux optics specifically designed for the T4GU6.5 ceramic metal halide lamp

CONSTRUCTION:

Extruded aluminum ballast housing
Stamped aluminum top plate and components
Spun aluminum canopy, fits standard 4" octagonal j-box
Blown satin cased, etched glass
On/off switch
GU6.5 TAL pulse rated socket

MOUNTING:

Canopy mounted, 10' feed cord standard

LABELING:

cUL listed


LAMPING:

CMH T4GU6.5 base, 15w (SYLVANIA METALARC® POWERBALL®), 20w and 39w



PROJECT:

TYPE:

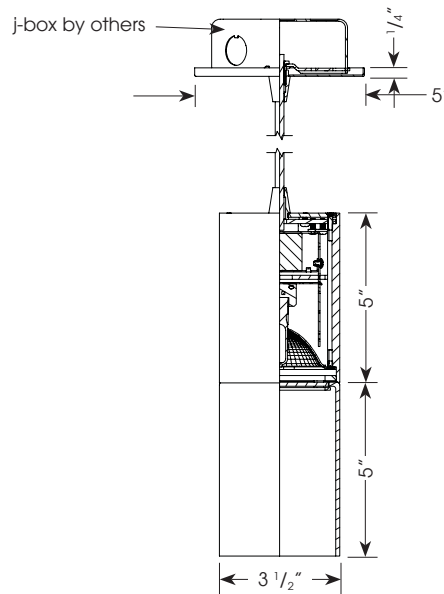

ELECTRICAL

Ballast	15w		Lamping 20w		39w	
	Input Watts	Amps*	Input Watts	Amps*	Input Watts	Amps*
Electronic 120v	18	.15	24	.20	45	.37

*data is for open circuit current
CMH T4GU6.5 base metal halide, 15w, 20w and 39

ORDERING INFORMATION:

Model	Wattage	Lamp Type	Driver	Finish Glass	Body	Mounting	Voltage
PARI-2R	15 20 39	T4GU6.5	E - electronic	SO - satin opal SA - satin amber	NA - brushed aluminum AMBZ - american bronze	CC - canopy/cord*	120

Example: PARI-2R-20-T4GU6.5-E-SO-NA-CC-120

Cat #:

*Canopy/cord to match the body finish of the fixture