

# PARI ARCHITECTURAL ROUND PENDANT 3

METAL HALIDE

PARI-3R  
T4GU6.5

**APPLICATION:**

Retail, hospitality and commercial task and decorative lighting

**OPTICS:**

Amerlux optics specifically designed for the T4GU6.5 ceramic metal halide lamp

**CONSTRUCTION:**

Extruded aluminum ballast housing  
Stamped aluminum top plate and components  
Spun aluminum canopy, fits standard 4" octagonal j-box  
Blown satin cased, etched glass  
On/off switch  
GU6.5 TAL pulse rated socket

**MOUNTING:**

Canopy mounted, 10' feed cord standard

**LABELING:**

cUL listed


**LAMPING:**

CMH T4GU6.5 base, 15w (SYLVANIA METALARC® POWERBALL®), 20w and 39w



PROJECT:

TYPE:

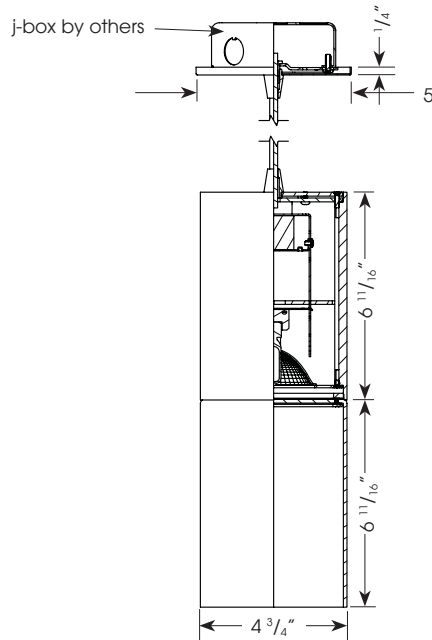

**ELECTRICAL**

Ballast	15w		Lamping 20w		39w	
	Input Watts	Amps*	Input Watts	Amps*	Input Watts	Amps*
Electronic 120v	18	.15	24	.20	45	.37

\*data is for open circuit current  
CMH T4GU6.5 base metal halide, 15w, 20w and 39

**ORDERING INFORMATION:**

Model	Wattage	Lamp Type	Driver	Finish Glass	Body	Mounting	Voltage
PARI-3R	15 20 39	T4GU6.5	E - electronic	SO - satin opal SA - satin amber	NA - brushed aluminum AMBZ - american bronze	CC - canopy/cord*	120

Example: PARI-3R-20-T4GU6.5-E-SO-NA-CC-120

Cat #:

\*Canopy/cord to match the body finish of the fixture