

EVOKE 2.9 ROUND GLASS DOWNLIGHT

E2.9RG
T4GU6.5

APPLICATION:

Commercial and retail ambient and task lighting

HOUSING CONSTRUCTION:

20 ga. steel painted matte black
Formed aperture plate with 5/8" lip (GB-standard)
Integral adjustable locking mounting bars
Thermally protected
GU6.5 TAL pulse rated socket

OPTICS:

Die-cast lamp housing, with twist in/out lens holder
Spun faceted & peened optics, specially designed for T4GU6.5 lamps
Accepts up to 2 accessories
Available in custom tints to tune beam to provide incandescent-like hue

LAMPING:

CMH T4GU6.5 base, 15w (SYLVANIA METALARC® POWERBALL®), 20w and 39w

REFLECTOR CONSTRUCTION:

Die-cast aluminum trim with brushed finish and clear coat
Blow molded satin opal etched glass

MOUNTING:

Specify ceiling mounting:
GRID: 1" deep aperture collar
GB (Gyp. Board): 5/8" deep aperture collar
Extra thick ceiling ring available for ceilings over 1" thick, consult factory
Note: Tilt adjustment reduced to 30° in ceilings 1 1/4" thick



LABELING:

cUL listed
Damp location



PROJECT:

TYPE:

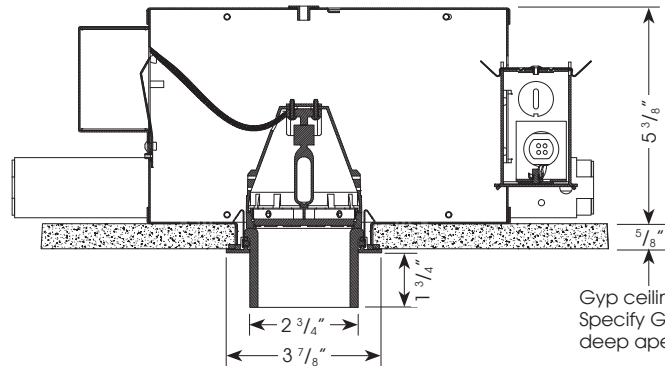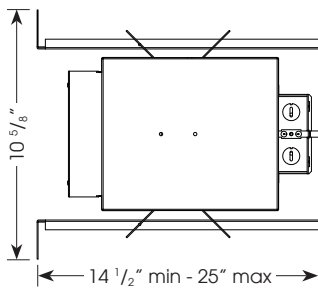

ELECTRICAL

Ballast	Input Volts	Lamping					
		15w		20w		39w	
		Watts	Amps*	Watts	Amps*	Watts	Amps*
Electronic 120v	120	18	.15	24	.20	45	.40
277v	277	18	.07	24	.09	45	.16

*data is for open circuit current
CMH T4GU6.5 base metal halide, 15w, 20w and 39w
Electronic ballast

Ceiling Cut Out Dimension: 3 7/16"

Amerlux reserves the right to change details that do not affect overall function and performance.

ORDERING INFORMATION:

Housing Model	Wattage	Lamp Type	Voltage	Beam Spread	Ceiling Mounting	Optic Options	Reflector Model	Aperture Finish
E2.9RD	15 20 39	T4GU6.5	120 277	CL - spot, 12° NF - narrow flood, 18° FL - flood, 25° WF - wide flood, 40°	GB - 5/8" deep collar GRID - 1" deep collar - (other, consult factory)	GOLD - ferric gold optic reflector DB2690 - DB2690 optic reflector	E2.9RG	SONA - satin opal glass with brushed aluminum ring

Complete Unit Specification: E2.9RD-20-T4GU6.5-120-NF-GB/E2.9RG-SONA
Housing Only: E2.9RD-20-T4GU6.5-120-NF-GB
Reflector Only: E2.9RG-SONA

Cat #: