

EVOKE 2.9 ROUND ADJUSTABLE WET LOCATION

E2.9RASHW
MR16

APPLICATION:

Hospitality, commercial and retail accent lighting

HOUSING CONSTRUCTION:

20 ga. steel painted matte black
Formed aperture plate with 5/8" lip (GB-standard)
Integral adjustable locking mounting bars
Thermally protected
Bi-pin base

REFLECTOR CONSTRUCTION:

Spun aluminum self flanged reflector with key slot cut
Variety of anodized aperture finishes in both white and clear flange
Steel mounting ring with torsion spring
Clear glass lens

LAMPING:

MR16 halogen, 50w max., 12v

OPTICS:

Cam adjustment mechanism provides lockable 0-40° tilt; 360°+ rotation
Spun aluminum lamp ring, snaps in/out for re-lamping, accepts up to 2 accessories
Solite beam softening lens (standard)

MOUNTING:

Specify ceiling mounting:
GRID: 1" deep aperture collar
GB (Gyp. Board): 5/8" deep aperture collar
Extra thick ceiling ring available for ceilings over 1" thick, consult factory
Note: Tilt adjustment reduced to 30° in ceilings 1 1/4" thick



LABELING:

cUL listed
Wet location



PROJECT:

TYPE:

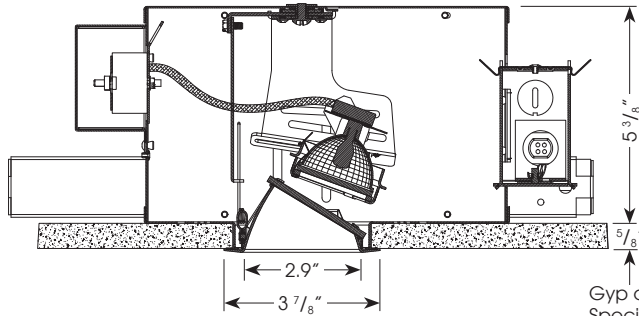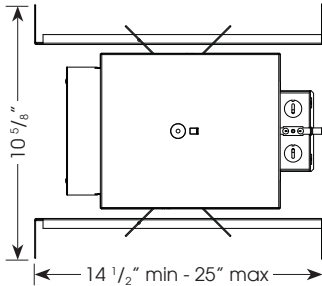

Ceiling Cut Out Dimension: 3 7/16" dia.

Gyp ceiling shown. Specify GRID for 1" deep aperture collar.

ELECTRICAL

Ballast	Lamping 50w	Input	
		Watts	Amps
Electronic	120v	50	.42
	277v	50	.18

MR16 Bi-pin base, 20w max.

Electronic ballast

ORDERING INFORMATION:

Amerlux reserves the right to change details that do not affect overall function and performance.

Housing			Reflector	
Model	Lamp Type	Voltage	Model	Aperture Finish
E2.9RA	MR16 (50W max)	120 277	E2.9RASHW	Reflector with White Painted Flange SDW - semi-diffuse clear CLW - specular clear GDW - specular gold BKW - specular black MWW - matte white
				Reflector with Clear Flange (flange finish matches cone finish) SDC - semi-diffus clear CLC - specular clear GDC - specular gold BKC - specular black
				GB - 5/8" deep collar GRID - 1" deep collar - - - (other, consult factory)

Complete Unit Specification: E2.9RA-MR16-120-GB/E2.9RASHW-SDW

Housing Only: E2.9RA-MR16-120-GB

Reflector Only: E2.9RASHW-SDW

Cat #: