

EVOKE 2.9" INSULATED CEILING

ROUND ADJUSTABLE TRIMLESS

E2.9RICATTL/
E2.9RATL
MR16

APPLICATION:

Residential accent and general lighting

HOUSING CONSTRUCTION:

0.050 aluminum and 20 ga. steel housing
Powder coat matte black
Formed aperture plate with 1/2" lip
Cast aluminum plaster ring with perforated flange
Adjustable mounting bars for (wood) joist construction
Thermally protected
GX5.3 Bi-Pin base

OPTICS:

Cam adjustment mechanism provides lockable 0-40° tilt; 360°+ rotation
Spun aluminum lamp ring, snaps in/out for re-lamping, accepts up to 2 accessories
Silk screened fixture positions provide exact setting for downlight, adjustable or wall wash reflector trims
Solite lens (standard)

REFLECTOR CONSTRUCTION:

Spun aluminum reflector with key slot cut
Variety of anodized aperture finishes
Steel mounting ring with torsion spring

MOUNTING:

For use in sheet rock ceilings
Max. ceiling thickness - 1"

LABELING:

cUL listed
Damp location
No through branch wiring for IC at 50w
Complies with Air Leakage requirements as stated in the Model Energy Code and Washington State Energy Code



LAMPING:

MR16 halogen, 50w max., 12v.



PROJECT:

TYPE:

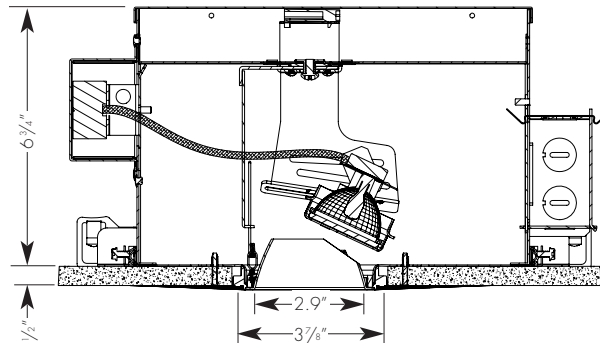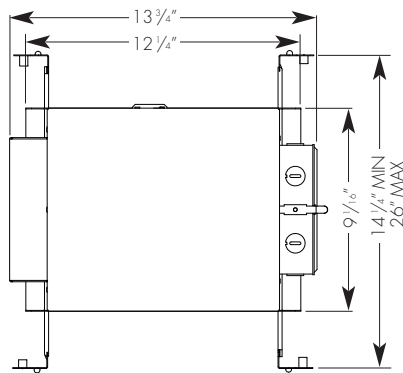

Ceiling cut out dimension: 4 1/16" dia.


ELECTRICAL

Transformer	Lamping 50w	
	Input watts	Amps
Electronic 120v	50	.42

MR16 Bi-Pin base, 50w max.

Electronic transformer compatible w/dimming systems that control electronic transformers

Amerlux reserves the right to change details that do not affect overall function and performance.



1. Reflector Trim
2. Fixture Housing Aperture Plate
3. Ceiling 5/8" (1" Max.)
4. Cast Aluminum Plaster Frame
5. Plaster Skim Coat (By Others)
6. 6-32 Type F Thread Cutting Screw

ECOTEKTURAL
Architectural lighting for sustainable design.



ORDERING INFORMATION:

HOUSING			REFLECTOR		ACCESSORIES
Model #	Lamp Type	Voltage	Model #	Aperture Finish	Ordered Separately
E2.9RICATTL	MR16 (50w max)	120	E2.9RATL	Reflector with Clear Flange (1/16" flange finish matches cone finish) SDC - semi-diffused clear CLC - specular clear GDC - specular gold BKC - specular black	HEX16 - hexcell louver SPR16 - linear spread lens (5"x55")

Complete Unit Specification: E2.9RICATTL-MR16-120/E2.9RATL-SDW

Housing Only: E2.9RICATTL-MR16-120

Reflector Only: E2.9RATL-SDW

Cat #:

EVOKE 2.9" INSULATED CEILING

ROUND ADJUSTABLE TRIMLESS

E2.9RICATTL/
E2.9RATL
MR16



TYPE :


ecotECTURAL
Architectural lighting for sustainable design.




FIXTURE DATA:

Complete photometric data (.ies format) available upon request.

50W MR16



Candelas at Nadir	
Deg	Candela
0	60
5	82
15	153
25	2322
30	6759
35	5428
45	242




Candelas at Nadir	
Deg	Candela
0	26
5	81
15	295
25	2709
30	3015
35	2392
45	254

APPLICATION DATA:

Notes and Definitions:

Beam spread is to 50% center beam candlepower (CBCP).
 D=Distance to floor or wall.
 FC=Footcandles on floor or wall at center beam aiming location.
 L=Effective Visual Beam length in feet (50% of maximum footcandle level).
 W=Effective Visual Beam width in feet (50% of maximum footcandle level).
 CB=Distance across or down to center beam location.



30° Aiming Angle
Horizontal
Footcandles



30° Aiming Angle
Vertical
Footcandles

	30° Aiming Angle Horizontal Footcandles					30° Aiming Angle Vertical Footcandles				
	D	FC	L	W	CB	D	FC	L	W	CB
SPOT (10°)	5.0'	178	1.2	1.3	3.0	3.0'	107	2.2	1.3	5.0
	7.5'	64	2.3	2.0	5.0	4.0'	67	2.5	1.6	6.0
	10.0'	44	2.6	2.5	6.0	5.0'	42	3.3	2.1	8.0
	12.5'	27	3.2	3.1	7.0	6.0'	30	3.8	2.4	9.0
FLOOD (25°)	5.0'	75	2.2	1.5	3.0	3.0'	47	3.0	1.5	4.0
	7.5'	36	3.0	2.2	4.0	4.0'	28	3.8	1.8	6.0
	10.0'	21	4.0	2.8	5.0	5.0'	18	4.8	2.4	7.0
	12.5'	13	5.1	3.6	6.0	6.0'	13	5.6	2.8	9.0