

# EVOKE 2.9" SQUARE ADJUSTABLE INTERNATIONAL

I-E2.9SA  
HIT-GU6.5

## APPLICATION:

Commercial and retail accent and display lighting

## LAMP/BALLAST HOUSING CONSTRUCTION:

Formed steel spring clips  
Die-cast aluminum mounting ring

## OPTICS:

Die-cast aluminum adjustment mechanism provides lockable 0-35° x 0-35° tilt  
Available in a variety of beam spreads featuring Amerlux optics specifically designed for the T4GU6.5 lamp  
Available in custom tints to tune beam to provide incandescent-like hue  
Glass lens

## LAMPING:

HIT-GU6.5 base, 20w and 35w

## ELECTRICAL:

Electronic ballast  
Terminal block for electrical connections  
GU6.5 TAL pulse rated socket

## REFLECTOR CONSTRUCTION:

Die-cast aluminum seamless self-flanged reflector trim  
Painted finishes include matte white and optical matte black with matte white flange  
Spring steel mounting clips

## MOUNTING:

Spring steel mounting clips allow installation from below  
Max. ceiling thickness - 1"

## LABELING:

CE CCC pending





PROJECT:

TYPE:

**ecotECTURAL**

Architectural lighting for sustainable design.

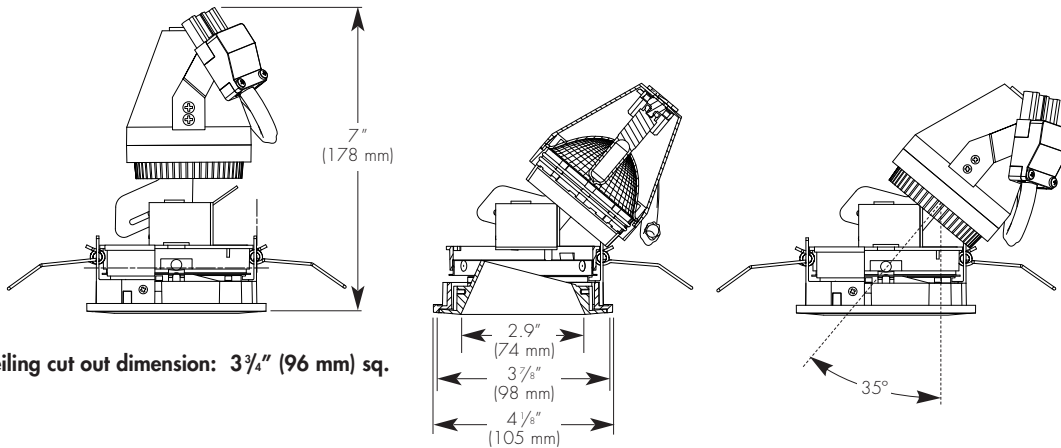

Ceiling cut out dimension: 3 3/4" (96 mm) sq.

## ELECTRICAL

Ballast	Lamping				
	1-20w		1-35w		
	Input watts	Amps*	Input watts	Amps*	
Electronic	220v	24	.19	44	.20
	240v	24	.15	43	.18


\*Data is for open circuit current

HIT-GU6.5 base metal halide, 20w and 35w

## GEAR (STANDARD)

TO EXCLUDE GEAR - ORDER LG OPTION  
(BALLAST/TRANSFORMER BY OTHERS)

	20w/35w
A	7 1/2" (190mm)
B	1 3/4" (43mm)
C	1 1/4" (32mm)



Amerlux reserves the right to change details that do not affect overall function and performance.

## ORDERING INFORMATION:

Model #	Wattage	Lamp Type	Voltage	Beam Spread	Aperture Finish	Options/Accessories	Listing Code
I-E2.9SA	20 35	HIT-GU6.5 (T4GU6.5)	220-240	CL - spot, 12° NF - narrow flood, 18° FL - flood, 25° WF - wide flood, 40° SL - linear spread, 5°x55°	<u>Reflector with White Painted Flange</u> MBW - matte black MWW - matte white SLVW - silver	DB2690 - DB2690 optic reflector GOLD - ferric gold optic reflector HEX20 - hexcell louver SOL20 - beam softening lens	CE CCC
						<b>To Exclude Gear</b> LG - less gear	

Example: IE2.9SA-20-HIT-GU6.5-220-240-NF-SDW-CE

Cat #: