

INSTRUCTION SHEET

689-20114




WBR08D / WBR08U INSTALLATION INSTRUCTIONS

PAGE 1 OF 1

WARNING - RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY. FIX-TURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL SPECI-FICATIONS. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.

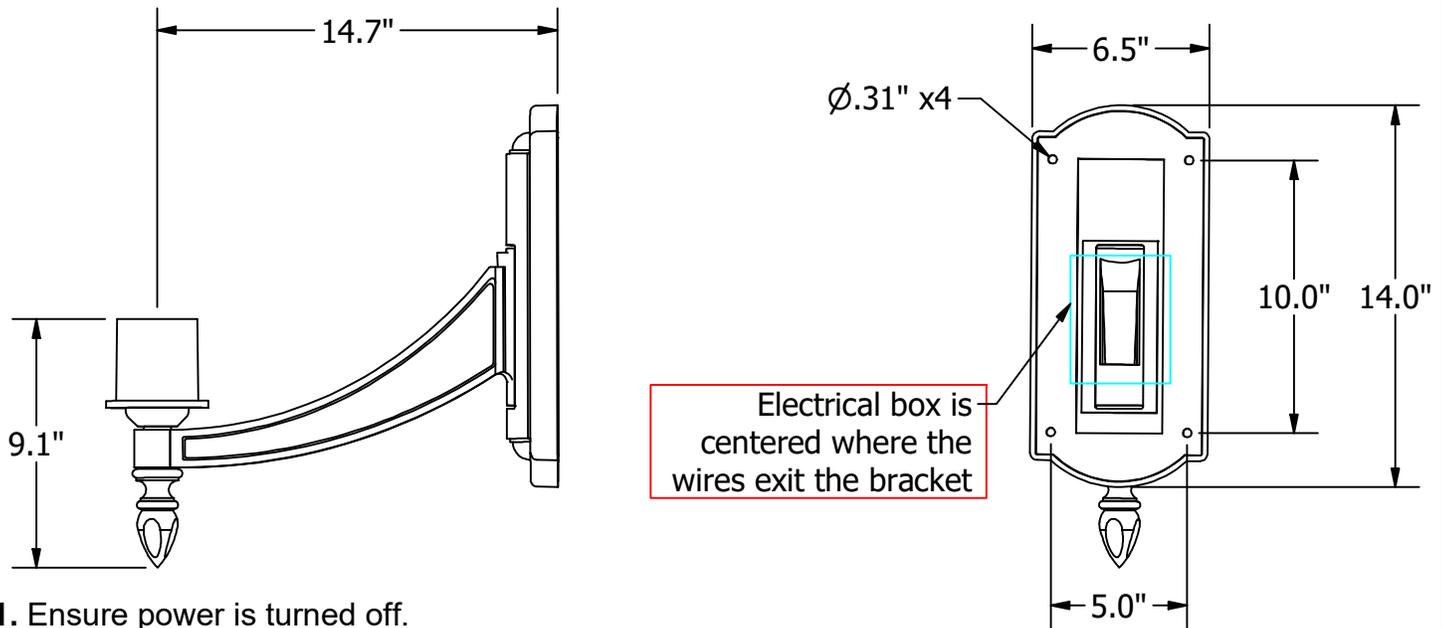

1. Ensure power is turned off.
2. Center the bracket over the electrical junction box as shown in the diagram and mark the position of the four (4) mounting through holes using the bracket as a template.
3. Remove the bracket and drill fastening anchor, i.e., expanders, masonry anchors, etc., holes in the wall. Insert appropriate sized anchors for the mounting surface. Note - The four (4) fastener through holes in the bracket cover will accept up to a $\frac{1}{4}$ inch fastener
4. Connect the bracket wires to the power source, observing all applicable local electrical and building codes.
5. Attach the bracket to wall surface by inserting four (4) fasteners through the holes indicated in the above diagram and tighten the fasteners until the bracket is securely fastened to the wall.
6. For Wet Locations use a silicone sealant around the top and sides of the back plate where it touches the wall surface to prevent water entry into the electrical box.
7. Restore power after securing the bracket to the wall.

Note: Due to the wide variety of wall surfaces that the bracket may be mounted to, the mounting hardware is NOT supplied.


178 Bauer Drive
OAKLAND N.J. 07436
P: 973-882-5010