

Flat Top Bollard

LED



Features


Amerlux's Bollards provide ambient lighting to property; improve security by increasing visibility and mark pathways and driveways, as well as accent landscaping, walkways, buildings and parking areas.

Product Overview

Type:	Exterior Accent/Ambient Lighting
Wattage:	11W, 17W, 24W
Lumen Output :	2,461 lm (24W, 5000K)
Color Temp:	3000K, 4000K, 5000K
CRI:	83
Standard Height:	41 ⁵ / ₈ inches
Diameter:	7 inches

PROJECT:

TYPE:

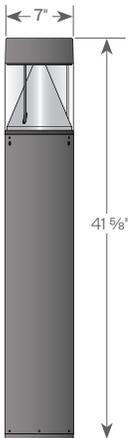

Construction:

Extruded aluminum housing with flush mounting base & vandal-resistant screws, round top, powdercoat finish over a chromate conversion coating, internal driver tray for easy maintenance. Aluminum LED board.

Reflector:

Specially designed aluminum cone reflector for LED.

Lens:

Clear polycarbonate lens

Driver:

- Electronic driver, 120-277V, 50/60Hz
- 0-10V dimmable driver.

Mounting:

Mounting Kit with 8" Anchor Bolts, included. Cannot be pre-shipped.

Finish:

Premium quality thermoset polyester powdercoat for a durable finish over a chromate conversion coating. Custom colors available upon request.

Options:

Surge Protection (**SP**)

180° Glare Shield, finish matches fixture finish (**GS**)

Bollards can be cut to custom heights upon request.

Listing & Ratings:

CSA listed for wet location, IP65

Operating Temperatures: -40°C to +40°C



5 year limited
warranty
AMERLUX LED



Flat Top Bollard

LED

PROJECT:

TYPE:


Ordering Information



- 1** Model
AXB7F
- 2** Wattage
11
17
24
- 3** Color Temp
30 - 3000K
40 - 4000K
50 - 5000K
- 4** Finish
Z - bronze
B - black
C - custom, consult factory
- 5** Options
SP - surge protection
GS - 180° glare shield, finish matches fixture finish

Performance Data


AXB7F/5K

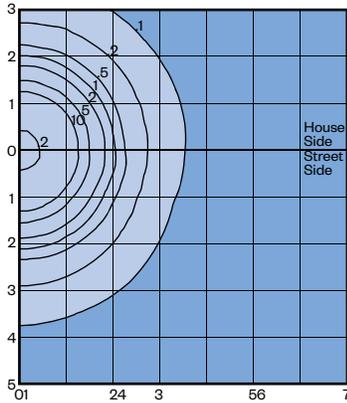

DELIVERED LUMENS

CCT	Wattage		
	11W	17W	24W
3000K	1037 lm	1452 lm	2178 lm
4000K	1125 lm	1575 lm	2362 lm
5000K	1172 lm	1641 lm	2461 lm

Anchor Bolts Mounting Kit (included)



Mounting Kit, includes bracket & (3) 8" zinc-plated anchor bolts.