

4" Extruded Series



Shown with Cover (4-COV)

Features

Aluminum light poles featuring a choice of extruded shafts. Accepts a wide variety of Amerlux post top luminaires.

7 1/2" square cast aluminum base flange

Choice of extruded shafts:

- 4" to 3" tapered, 0.125 wall
- 4" OD fluted (12 flutes), 0.125 wall
- 4" OD smooth round, 0.125 wall


Extruded shaft is circumferentially welded to the structural base

A 2x4" handhole with curved lap style aluminum door and two stainless steel self-tapping screws is standard. A grounding provision incorporating a tapped 1/4" 20NC hole is provided opposite the handhole.

Ground lug provided inside base

PROJECT:

TYPE:

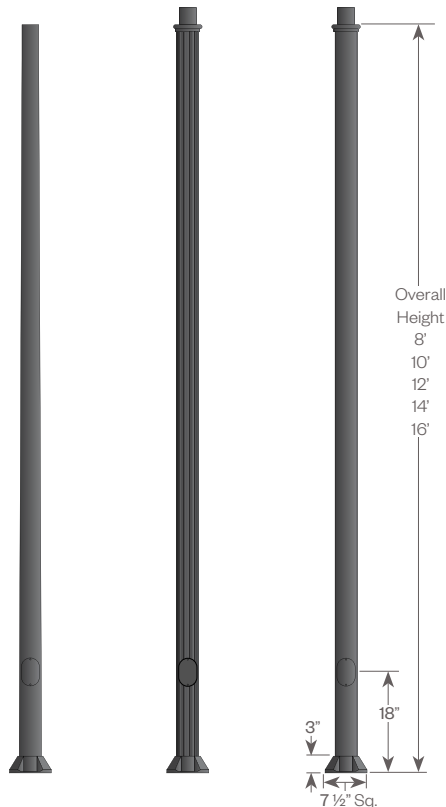

APRT4.XX

APFS4.XX

APRS4.XX

See pgs 3-4 for more details.

Materials:

Base - Cast aluminum (356-T6)

Shaft - Extruded Aluminum (6063-T6)

- Tapered Aluminum (6063-T6)

Anchor Bolts - Hot dipped galvanized steel, ordered separately

Finish:

Premium quality thermoset polyester powdercoat for a durable finish.

Accessories:

- Single or double sided field rotatable banner arms
- Flag pole holder
- GFCI - covered ground fault circuit protected duplex outlet
- Two-piece cover placed at base of pole for better aesthetics



4" Extruded Series



PROJECT:

TYPE:

Pole Ordering Information



1 <u>Model</u> APRT4 - 4" to 3" O.D. pole, tapered 0.125 wall APFS4 - 4" O.D. fluted pole, 0.125 wall APRS4 - 4" O.D. smooth pole, 0.125 wall	3 <u>Finish</u> BLK - satin black CLB - classic bronze GBZ - gloss textured bronze GRN - green GTB - gloss textured black TBK - textured black TGR - gloss textured green CSTM - custom, consult factory
2 <u>Pole Height</u> 08 - 8'-0" 10 - 10'-0" 12 - 12'-0" 14 - 14'-0" 16 - 16'-0"	4 <u>Options/Accessories</u> GFCI-TOP - ground fault circuit protected outlet, placed 6" from the top of pole (not available for the APRT4 model) LT - less tenon

Anchor Bolt Ordering Information (Ordered separately, can be pre-shipped upon request)



1 <u>Model</u> APXX4-555-0018 - 3/4" x 17" anchor bolts
--

Accessory Ordering Information (Ordered separately)




1 <u>Model</u> (all accessories (except 4-COV) below are for non-tapered shafts only) BA18-FRC4 - 18" banner arm, 4" OD shaft BA24-FRC4 - 24" banner arm, 4" OD shaft 2BA18-FRC4-180 - double sided 18" banner arms, 4" OD shaft 2BA24-FRC4-180 - double sided 24" banner arms, 4" OD shaft FPH-4 - flag pole holder for 4" non-tapered poles 4-COV - two piece cover
--

4" Extruded Series


PROJECT:

TYPE:

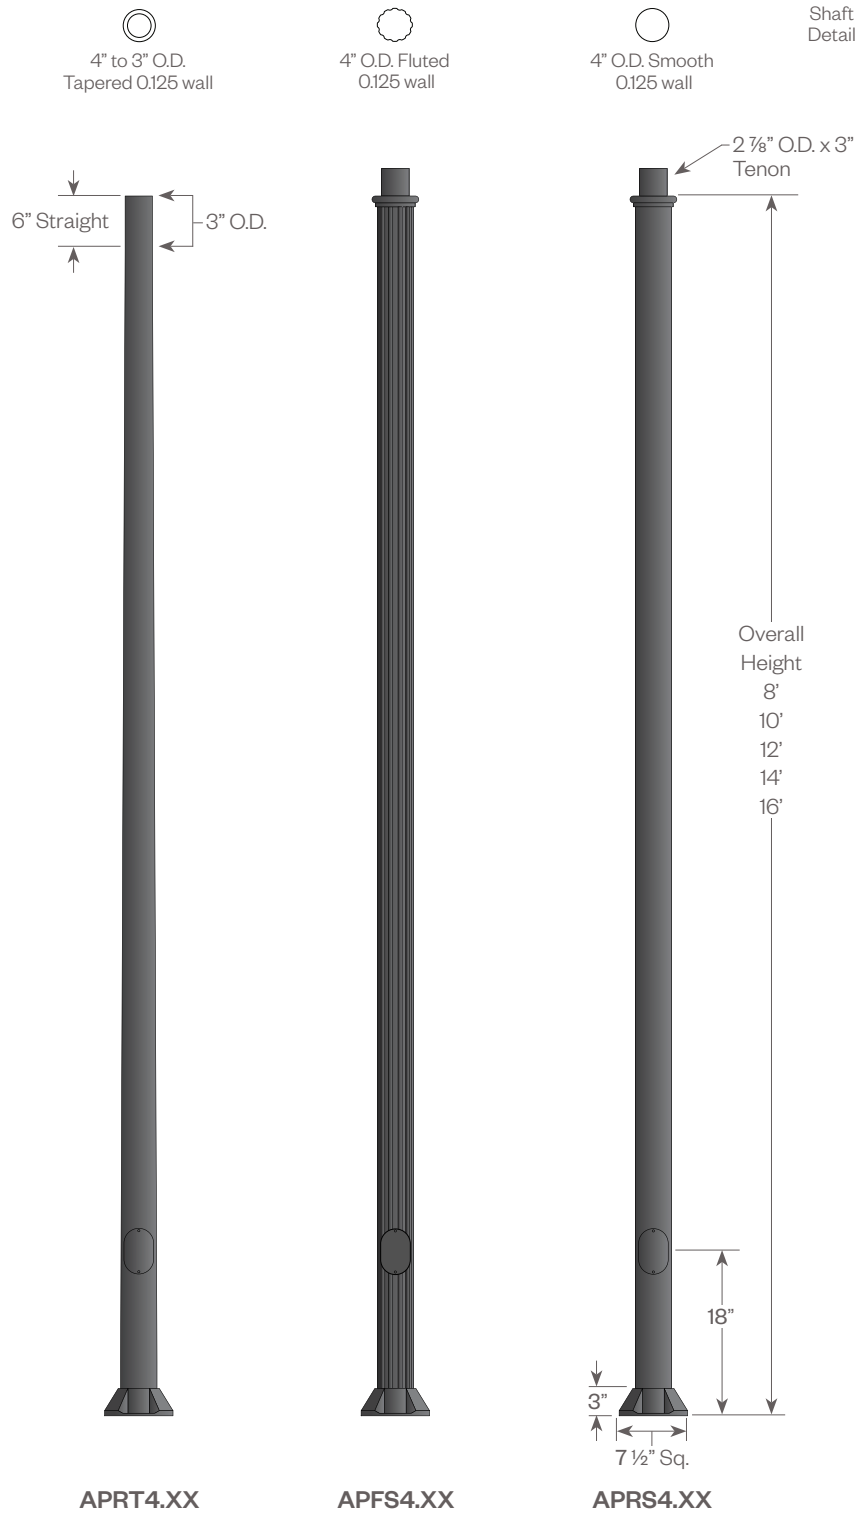

4" Extruded Series

PROJECT:

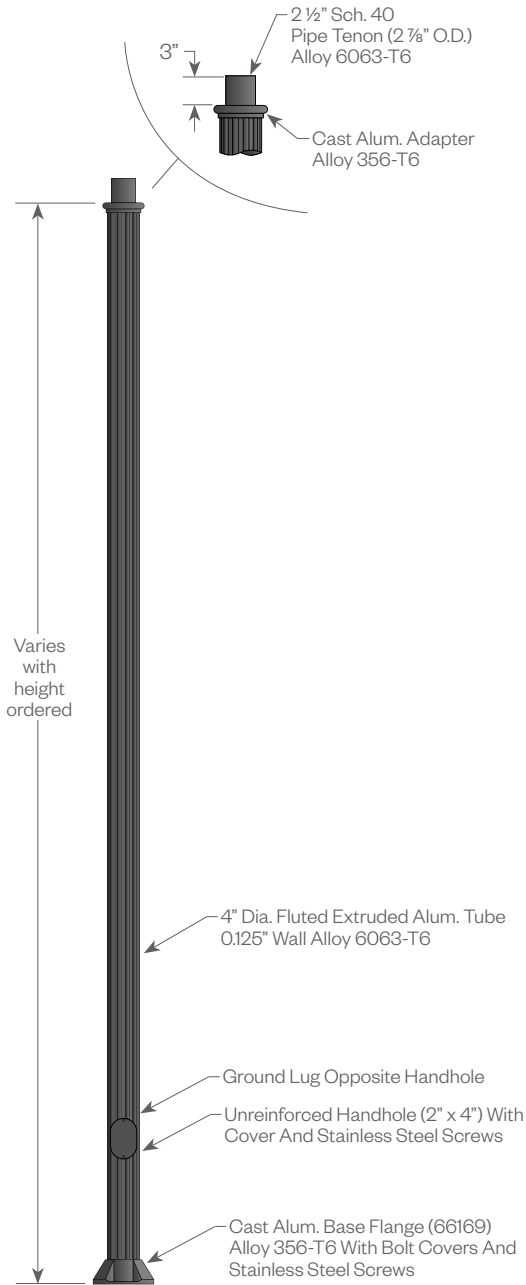

Finish

The post will be finished with an electrostatically applied thermoset polyester powder coat. Prior to finishing, the parts are thoroughly cleaned. Our powder coat finish is durable, long lasting, attractive and scratch resistant as well as environmentally friendly. We offer 7 stock finishes or hundreds of special order colors including custom matching for existing projects (additional charges apply).

BLK - Satin Black
CLB - Classic Bronze
GBZ - Gloss Textured Bronze
GRN - Green

GTB - Gloss Textured Black
TBK - Textured Black
TGR - Gloss Textured Green

TYPE:

Accessories

Banner Arms

Single or double sided field rotatable banner arms.

BA18 (18") or **BA24** (24") banner arms

FRC4 (4"OD shaft)

Add a (2) for a double arm.

Example: **2BA18-FRC4-180**

See ordering guide for configurations



FPH-4

Extruded aluminum holder for 1" OD flag poles.

Available for 4" OD non-tapered pole.



GFCI - Top


Covered ground fault circuit protected duplex outlet.

Placed near top of pole. Wet while in use rated.




4 - Cover

Two piece cover is fabricated from stamped and formed aluminum.



GFCI Orientation Guide



As viewed
from above



Note: GFCI placed at 0° unless otherwise specified.

Note: Orientation of additional accessories must be specified when ordering.

Anchor Details



(4) 3/4"-10NC Galv. Stl. Anchor Bolts, AASHTO M314-90 Grade 55, Galv. Per ASTM A153.

(4) 3/4"-10NC Galv. Stl. Hex. Nuts

(4) 3/4" Galv. Stl. Lockwashers

(4) 3/4" Galv. Stl. Flatwashers

Anchor bolts and templates can be requested prior to product shipment.