




WARNING - RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY. FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL SPECIFICATIONS. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING. RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.

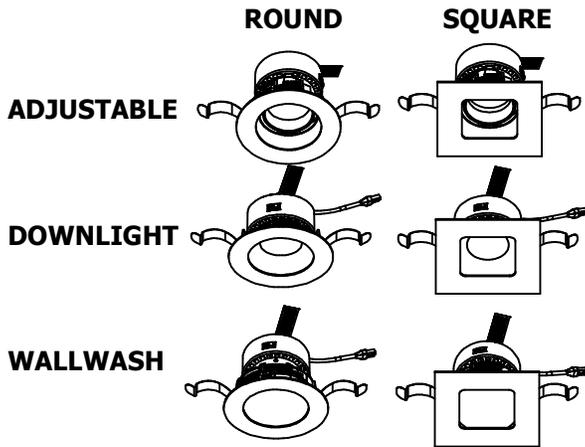


1. MAKE ELECTRICAL CONNECTION

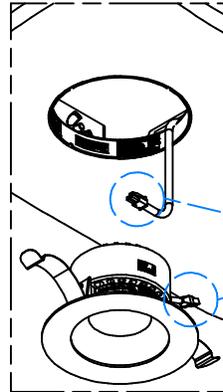

CONNECT THE OPTICAL HEAD HARNESS TO THE FRAME HARNESS.
DO NOT SUPPORT TRIM ASSEMBLY WEIGHT USING QUICK CONNECT HARNESSES.




2. SPRING CLIPS

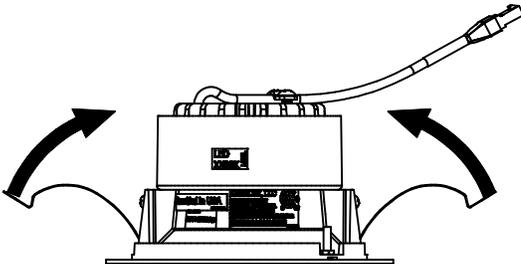


COMPRESS AND HOLD 2X SPRING CLIPS

3. INSERT OPTICAL HEAD




INSERT OPTICAL HEAD INTO CEILING CUTOUT

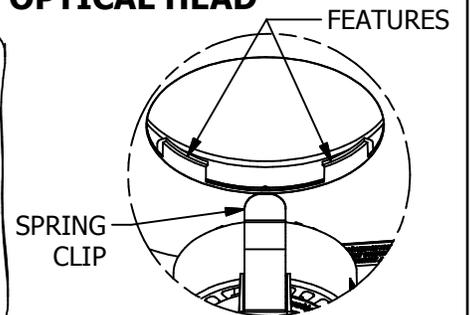

NOTE: FOR ROUND TRIMLESS STYLES ENSURE SPRING CLIPS ARE ALIGNED BETWEEN FEATURES

4. TILT ADJUSTMENT

(IF APPLICABLE)

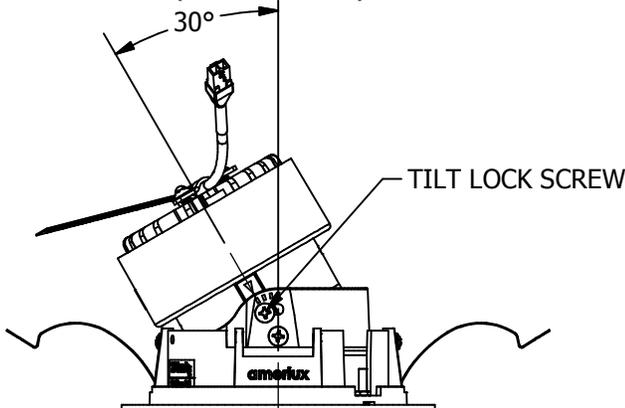

5. ROTATION ADJUSTMENT

(IF APPLICABLE)

