




PROJECT: TYPE:

Features

Carisma® Pendant is part of a family of architectural linear luminaires that offer excellent performance, quality, visuals and value. A sleek edge-to-edge lens design results in an elegant aesthetic with clean lines. Carisma®'s patent pending design includes an integrated optical system that minimizes optical losses, allowing for industry-leading efficacy that meets the stringent requirements for DLC Listing (DLC Listing pending). A tailored end cap design and Amerlux's trusted catch-and-latch mechanism prevents all light leakage.

The Carisma® Pendant offers luminaires with 2" and 3" wide apertures, delivering seamless lighting as discrete individual fixtures, continuous rows or patterns. Carisma® can be specified to the nearest 1/8" and is available in pendant, surface, wall and recessed mounting options, providing designers with the versatility to light up a space with their Carisma®.

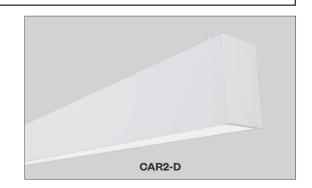

Product Overview

Type: Direct distributrion with Pendant, Surface or Wall Mounting Wattage: 5W/ft, 10W/ft (or specify wattage between 3W/ft and 10W/ft)

Color Temp: 2700K*, 3000K, 3500K, 4000K (*90+ CRI only)

CRI: 80+ typ. or 90+ typ.

Dimming (wired): 0-10V, 1% dim, 120/277VAC (standard)

Lutron LDE1 Hi-lume® 1% Soft-On/Fade-to-Black

DALI, 1% dim

Dimming (wireless): Lutron Athena (integral wireless RF node)

BubblyNet Bluetooth

Certifications





† DLC pending

Fixture Summary

Performance Data

Wattage	Performance Lo	ens	Asymmetric Le	ens	Wide Optic Direct Lens		
per Foot	Delivered Lumens	LPW	Delivered Lumens	LPW	Delivered Lumens	LPW	
5	2519	126.8	2693	135.6	2565	128.3	
10	4755	122.8	5408	128.6	4959	124	

Data is based on 4' fixture, 3500K-80 120V IES files available on website.

Electrical Data

Electrical Data								
		4'		8'				
Wattage		System		System				
per Foot	Voltage	Watts	Amps	Watts	Amps			
5	120V	19.8	0.17	40.2	0.34			
	277V	20.5	0.07	40.1	0.15			
10	120V	38.7	0.32	80.3	0.67			
10	277V	40	0.15	79	0.29			

Electronic multi-volt (120-277VAC), constant current LED driver.

Standard Patterns

L				7	Wall to Ceiling	Custom
Yes	Yes	Yes	Yes	Yes	No	No

Runs

Individual Runs: 2' - 8' (specify in 1' increments).

Continuous Runs: > 8' (specify to the nearest foot).

Custom: Made to measure lengths available (specify to nearest 1/8" of field dimensions). Requires approval drawings. Added cost & lead time.





PROJECT: TYPE:

Ordering Information

CAR2-D 120/277 10 5 11 Model Optics Mounting CAR2-D PL performance lens Pendant Mount (aircraft cable suspension) **Wall Mount** Surface Mount ASY asymmetric lens ASW04 through ceiling tile or gyp board, white, 4'* WM wall mount SM surface mount WOD wide optic direct lens ASW10 through ceiling tile or gyp board, white, 10' ASW20 through ceiling tile or gyp board, white, 20' ASB04 through ceiling tile or gyp board, black, 4'* ASB10 through ceiling tile or gyp board, black, 10' ASB20 through ceiling tile or gyp board, black, 20' ASW04T over ceiling tee, white, 4'* ASW10T over ceiling tee, white, 10' ASW20T over ceiling tee, white, 20' ASBO4T over ceiling tee, black, 4'* ASB10T over ceiling tee, black, 10' ASB20T over ceiling tee, black, 20' * 4' (xxx04) is standard length, other lengths are additional charge

4	Wattage (pe	er foot)	5	Color Temp		6	Finish	7	Voltage
	Standard	<u>Optional</u>		80+ CRI	90+ CRI		HW high reflectance matte white		120/277
	5 5W/ft	3* 3W/ft		30 3000K-80+	279 2700K-90+		BT black texture		
	10 10W/ft	4* 4W/ft		35 3500K-80+	309 3000K-90+		ST silver texture		
		6 6W/ft		40 4000K-80+	359 3500K-90+		For other RAL color, consult factory		
		7 7W/ft			409 4000K-90+				
		8 8W/ft							
		9 9W/ft							
	* 3' min. length	required							

8 Length

	×	
Length A	Length B	Length C
- all patterns	- all patterns	- PU
- IND	- PR (2 lengths of 2)	- PZ
- CON		
- CUS		

9 Configuration

IND¹ individual fixture, 2' to 8' in 1' increments

 ${f CON}$ continuous run > than 8', specify to nearest foot

CUS custom made to measure lengths (specify to nearest 1/8" of field dimensions)

Standard Patterns (see pg 6 for details)

PLL L left, (2) straights + (1) 90° corner, leg right

PLR L right, (2) straights + (1) 90° corner, leg left

PU U shape, (3) straight lengths + (2) 90° corners

PR Rectangle shape, (4) straight lengths + (4) 90° corners

PZ Z shape, (3) straight lengths + (2) 90° corners

10 Drivers/Controls

Wired

0-10V 1% electronic dimming, multi-volt 120-277VAC constant current driver (standard).

HILUME-H-ECO Lutron LDE1 Hi-lume® 1% dim Soft-On/Fade-to-Black

DALI DALI dimming 120-277VAC, 1% dim

Wireless

AWNR-WH-SR Lutron Athena wireless node, RF only, white, D4i/DALI-2

AWNR-BL-SR Lutron Athena wireless node, RF only, black, D4i/DALI-2

AWNR-WH-010 Lutron Athena wireless node, RF only, white, O-10V

AWNR-BL-010 Lutron Athena wireless node, RF only, black, O-10V

AWNR-OCC-WH-SR Lutron Athena wireless node, Occupancy & Daylight sensor, white, D4i/DALI-2

AWNR-OCC-BL-SR Lutron Athena wireless node, Occu pancy & Daylight sensor, black, D4i/DALI-2

AWNR-OCC-WH-010 Lutron Athena wireless node, Occupancy & Daylight sensor, white, 0-10V AWNR-OCC-BL-010 Lutron Athena wireless node, Occupancy & Daylight sensor, black, 0-10V

BN-BT-OCC-WH-SR BubblyNet Bluetooth node, Occupancy & Daylight sensor, white, D4i/DALI-2

BN-BT-OCC-WH-010 BubblyNet Bluetooth node, Occupancy & Daylight sensor, white, 0-10V

11 Options/Accessories

EMC-PF² emergency circuit requires power feed located in last fixture section (for other locations consult factory)

PF2 Extra power feed for additional circuiting

EMB emergency battery pack (not available for lengths under 4')

² Not available with IND (individual) configuration.



¹ Lengths less than 4' may have restrictions based upon wattage, lengths, drivers or other options.



PROJECT: TYPE:

Specifications

Construction

Extruded aluminum housing and reflector. Die-cast end caps match fixture body

Weight: 2.5 lbs/ft (may vary based on configurations and accessories)

Optical

All lenses are snap-in, extruded acrylic, with a maximum length of 8'. Amerlux's proprietary acrylic lens provide excellent transmission while effectively concealing source image.

PL - Performance Lens provides high efficiency with controlled lens surface brightness.

ASY - Asymmetric distribution for wallwashing.

WOD - Wide Optic Direct lens for maximizing fixture spacing.

LED

Our LED binning is within 3 MacAdam ellipse. Boards are configured for maximum flexibility resulting in even illumination no matter the fixture layout. LED boards are easily replaced in the field with just a Phillips screw driver.

Color Temperature Options: 2700K*, 3000K, 3500K, 4000K

CRI: 80+, 90+

R9: 16 @ CRI 83; R9: >50 @ CRI 92

Life: 50,000+ hr., > 70% of initial lumens (L70)

* Available in 90+ CRI only

Wiring: Individual and "Beginning of Run" (BOR) fixtures are prewired with power cord. All configurations have quick connect power harnesses for row connections. Standard Wattage: 5W/ft, 10W/ft.

Optional Wattages: 3W/ft, 4W/ft, 6W/ft, 7W/ft, 8W/ft, 9W/ft. (3W & 4W have a W have a Wminimum length of 3'). For other wattages consult factory.

Emergency circuit via remote inverter or auxiliary emergency power supply (by others).

This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Amerlux® recommends using additional surge protection with this unit (supplied by others), surge and over voltage damage is not covered under warranty.

EMC-PF - Emergency circuit requires power feed to be located in last fixture section for continuous runs. For other locations consult factory. Not available for individual (IND) configuration.

PF - Extra power feed for additional circuiting. Not available for individual (IND) configuration.

Finish

All painted surfaces are premium powder coated baked on for maximum durability and color stability.

HW - High reflective matte White

BT - Black Texture

ST - Silver Texture

For special paint colors supply RAL and/or actual paint chip for factory consultation.

Configurations/Lengths

Straights

IND - Individual fixtures are made of single standard lengths of 2 ft to 8 ft (in 1' increments). These are stand alone fixtures with matching End Caps, supplied with the mounting hardware. Lengths less than 4' may have restrictions based upon wattage, lengths, drivers or other options.

CON - Continuous runs, > 8' specified to nearest whole foot length in 1' increments. Runs made from standard lengths have End Caps at the beginning and end of run. Runs > 60' may require second power feed. Each housing has factory installed alignment pins. Mating fixtures are easily aligned and joined. Wiring is made fast and positive with molded quick connectors.

CUS - Custom made to measure runs are made to nearest 1/8" of customer supplied field measurements or drawings. Custom lengths use the same hardware for hairline joining.

PXX- Standard Patterns consist of 90° corners with standard lengths (4' to 8' in 1' increments), continuous runs or made to measure lengths. Depending upon complexity of the pattern drawings may be required from the customer. If ordering please give overall lengths.

A'-B'-PLL - L Left - (1) 90° Corner (2) segments. Specify overall segments: A' & B' A'-B'-PLR - L Right - (1) 90° Corner (2) segments. Specify overall segments: A' & B' A'-B'-PR - Rectangle - (4) 90° Corners joining (4) segments. Specify overall segments: A' & B'

A'-B'-C'-PU - U shape - (2) 90° Corners joining (3) segments. Specify overall segments: A', B', & C'

A'-B'-C'-PZ - Z shape - (2) 90° Corners joining (3) segments. Specify overall segments: A'. B'. & C

See page 6 for layouts.

Mounting

The Carisma Direct is intended for pendant, surface or wall mounting. Pendant Mount-ASWxx - Direct pendant munted in center of ceiling tile or gypsum board ceiling (standard) i.e. ASWxx. Or if canopy is installed on a grid Tee runner add. T i.e. ASWxxT.

Cable is stranded stainless steel wire. All fittings are protected against rust and corrosion. Canopies are 5" x 1/4" die formed painted steel. Adjustment mechanism allows for infinite height adjustment. Amerlux recommends the required feed and non-feed suspensions based upon length and electrical options. Options include: color of canopy and power cord (black or white), length 4', 10' or 20', and mounting condition, in center of ceiling tile and in gypsum board ceiling (standard) i.e. ASWxx. Or if canopy is installed on a grid Tee runner add, T i.e. ASWxxT

Wall Mount-WM - Direct wall mounted using steel cleat bracket attached to fixture housing and wall bracket with set screws. Two bracket assemblies are used for each length. A third center bracket may be recommended. J-box required at feed

Surface Mount-SM - Direct surface mounted - housing needs to be attached to solid structure above. Mounting holes are pre-drilled at factory. Some fixture disassembly and reassembly required. Mounting hardware by others.

EMB - Emergency battery pack - 10W output power, 90 min of illumination time, up to 1300 lm of initial light output. Illuminated test-switch/charging indicator light is provided. Wattage consumption by EM: 2.5W/ft (4ft fixture), 1.25W/ft (8ft fixture). Request can be made to light up 4ft section on 8ft unit.

Certifications

Approved to UL standards for damp locations as tested by CSA Intended for indoor use only DLC Listing pending

Amerlux's 5 year limited warranty. Please consult Amerlux website for details.







PROJECT: TYPE:


Product Details


Pendant



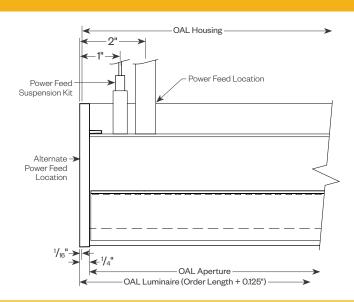



Wall Mount



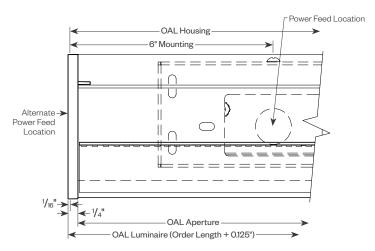

Surface Mount



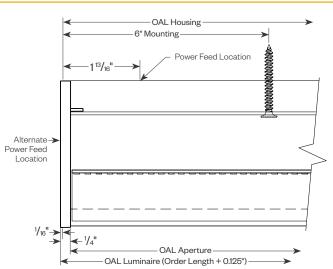







PROJECT: TYPE:

Cable Kit Suspension - Ceiling or Gypsum Board (ASW04, ASW10, ASW20, ASB04, ASB10, ASB20)

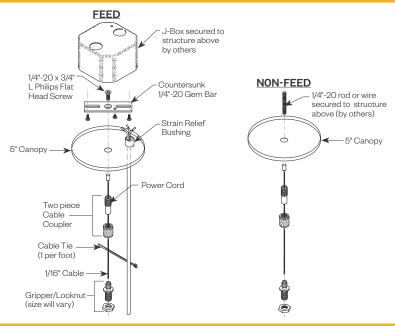


Cat#	Length	Cord/Canopy	Application
ASW04	4'	white/white	ceiling tile/gypsum
ASW10	10'	white/white	ceiling tile/gypsum
ASW20	20'	white/white	ceiling tile/gypsum
ASB04	4'	black/black	ceiling tile/gypsum
ASB10	10'	black/black	ceiling tile/gypsum
ASB20	20'	black/black	ceiling tile/gypsum
ASW04T	4'	white/white	ceiling tee
ASW10T	10'	white/white	ceiling tee
ASW20T	20'	white/white	ceiling tee
ASB04T	4'	black/black	ceiling tee
ASB10T	10'	black/black	ceiling tee
ASB20T	20'	black/black	ceiling tee

Tee Grid or Screw Slot (ASW04T, ASW10T, ASW20T, ASB04T, ASB10T, ASB20T)

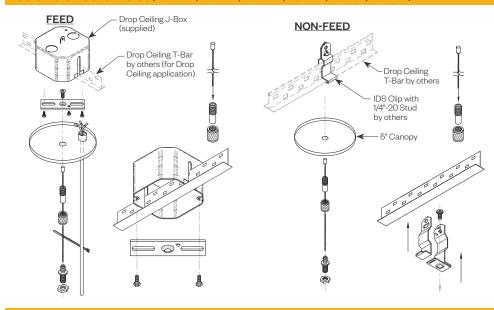

Tool-less Joining

Line up the two housings using the alignment brackets. Secure them together by using the Catch & Latch System on the top of the extrusion.







PROJECT:


Optional Sensor/RF Node

Amerlux® has partnered with control companies to create building environments that are safer and smarter, than ever before. At the heart of our partnership is intelligent RF nodes and Smart Sensor, the most advanced digital wireless communication and sensors available today. Integrated into Amerlux products.

TYPE:

Minimum run length is 3' for wireless sensor and RF node.

INDIVIDUAL (MIN 3' LENGTH)





Carisma® 2" Patterns

Standard Patterns

All corners are standard 90°, standard length legs. Use standard lengths: 4' min to 8' in 1 foot increments.

Continuous runs must be the same length in pairs for closed configuration.




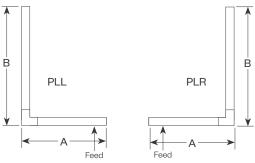


PLL - L Left, (2) straights + (1) 90° corner, leg right PLR - L Right, (2) straights + (1) 90° corner, leg left

Provide overall lengths: A' & B'


Nomenclature: A-B-PLL A-B-PLR

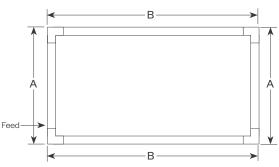

PR - Closed Rectangle, (4) straight lengths + (4) 90° corners Provide overall lengths: A' & B' Nomenclature: A-B-PR

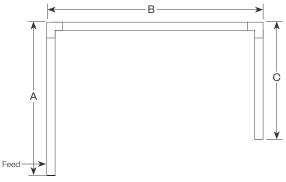

PU - Open U, (3) straight lengths + (2) 90° corners Provide overall lengths: A', B' & C' Nomenclature: A-B-C-PU

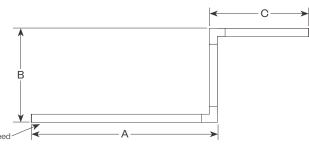

PZ - Open Z, (3) straight lengths + (2) 90° corners Provide overall lengths: A', B' & C' Nomenclature: A-B-C-PZ





PROJECT: TYPE:

Performance Data


Multiplying Factors: (Multiplying Factor is based on 3500K-80120V IES file on website)

Wattage:	3W	4W	5W	6W	7W	8W	9W	10W
Factor:	0.59	0.78	1.0	1.20	1.40	1.60	1.79	1.98

CCT:	3000K-80	3500K-80	4000K-80	2700K-90	3000K-90	3500K-90	4000K-90
Factor:	0.97	1.0	1.02	0.90	0.92	0.92	0.94

CARISMA 2" DIRECT PERFORMANCE LENS 5W 3500K 4FT

Total Watts: 20 Total Lumens: 2,519 Source: 192 White LED's



ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt				
0-40	1154	45.8				
0-60	1990	79.0				
0-90	2519	100.0				
90-180	0	0.0				
Efficacy (lumens/watt) = 126.8 lm/W						


COEFFICIENTS OF UTILIZATION

RC		8	0	
RW	70	50	30	10
RCR				
0	119	119	119	119
1	109	104	100	96
2	99	91	84	78
3	90	80	71	65
4	83	71	62	55
5	76	63	54	48
6	70	57	48	42
7	65	52	43	37
8	61	47	39	33
9	57	43	35	30
10	53	40	32	27
A1. (. 1.6				

Note: Values expressed as % of total lumen output delivered to the task surface.

CARISMA 2" DIRECT PERFORMANCE LENS 10W 3500K 4FT

Total Watts: 39 Total Lumens: 4,755 Source: 192 White LED's



ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-40	2177	45.8
0-60	3754	78.9
0-90	4755	100.0
90-180	0	0.0

Efficacy (lumens/watt) = 122.8 lm/W

COEFFICIENTS OF UTILIZATION

RC		8	O	
RW	70	50	30	10
RCR				
0	119	119	119	119
1	109	104	100	96
2	99	91	84	78
3	90	80	71	65
4	83	71	62	55
5	76	63	54	48
6	70	57	48	42
7	65	52	43	37
8	61	47	39	33
9	57	43	35	30
10	53	40	32	27

Note: Values expressed as % of total lumen output delivered to the task surface.







PROJECT: TYPE:

Performance Data (continued)

Multiplying Factors: (Multiplying Factor is based on 3500K-80120V IES file on website)


Wattage:	3W	4W	5W	6W	7W	8W	9W	10W
Factor:	0.59	0.78	1.0	1.20	1.40	1.60	1.79	1.98

CCT:	3000K-80	3500K-80	4000K-80	2700K-90	3000K-90	3500K-90	4000K-90
Factor:	0.97	1.0	1.02	0.90	0.92	0.92	0.94

CARISMA 2" DIRECT ASYMMETRIC LENS 5W 3500K 4FT

Total Watts: 20 Total Lumens: 2693 Source: 192 White LED's

LTL# 15335267.01

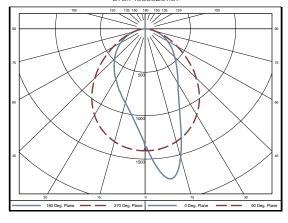

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt				
0-40	1446	53.7				
0-60	2259	83.9				
0-90	2692	100.0				
90-180	0	0.0				
Efficacy (lumens/watt) = 135.6 lm/W						

COEFFICIENTS OF UTILIZATION


RC		8	80		
RW	70	50	30	10	
RCR					
0	119	119	119	119	
1	110	105	102	98	
2	101	93	57	82	
3	93	83	75	69	
4	86	74	66	60	
5	79	67	58	53	
6	74	61	53	47	
7	69	56	48	42	
8	64	51	43	38	
9	60	48	40	34	
10	57	44	37	32	

Note: Values expressed as % of total lumen output delivered to the task surface.

CARISMA 2" DIRECT ASYMMETRIC LENS 10W 3500K 4FT

Total Watts: 42 Total Lumens: 5408 Source: 192 White LED's

LTL#15335267.02

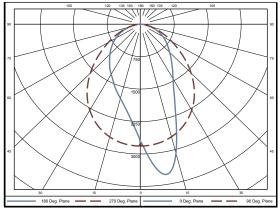

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt				
0-40	2906	53.7				
0-60	4535	83.9				
0-90	5408	100.0				
90-180	0	0.0				
Efficacy (lumens/watt) = 128.6 lm/W						

COEFFICIENTS OF UTILIZATION

RU		8	80		
RW	70	50	30	10	
RCF	?				
0	119	119	119	119	
1	110	105	102	98	
2	101	93	57	82	
3	93	83	75	69	
4	86	74	66	60	
5	79	67	58	53	
6	74	61	53	47	
7	69	56	48	42	
8	64	51	43	38	
9	60	48	40	34	
10	57	44	37	32	

Note: Values expressed as % of total lumen output delivered to the task surface.





PROJECT: TYPE:

Performance Data (continued)

Multiplying Factors: (Multiplying Factor is based on 3500K-80120V IES file on website)


Wattage:	3W	4W	5W	6W	7W	8W	9W	10W
Factor:	0.59	0.78	1.0	1.20	1.40	1.60	1.79	1.98

CCT:	3000K-80	3500K-80	4000K-80	2700K-90	3000K-90	3500K-90	4000K-90
Factor:	0.97	1.0	1.02	0.90	0.92	0.92	0.94

CARISMA 2" DIRECT WIDE OPTIC DIRECT LENS 5W 3500K 4FT

Total Watts: 20 Total Lumens: 2565

106235021CRT-002



ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt				
0-40	1184	46.2				
0-60	2101	81.9				
0-90	2565	100.0				
90-180	0	0.0				
Efficacy (lumens/watt) = 128.3 lm/W						

COEFFICIENTS OF UTILIZATION


RC		8	O	
RW	70	50	30	10
RCR				
0	119	119	119	119
1	109	105	100	97
2	99	91	85	79
3	91	80	72	66
4	83	71	63	56
5	76	64	55	48
6	71	57	48	42
7	65	52	43	37
8	61	47	39	33
9	57	43	35	30
10	53	40	32	27

Note: Values expressed as % of total lumen output

CARISMA 2" DIRECT WIDE OPTIC DIRECT LENS 10W 3500K 4FT

Total Watts: 40 Total Lumens: 4959

106235021CRT-001



ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-40	2287	46.1
0-60	4059	81.9
0-90	4959	100.0
90-180	0	0.0

Efficacy (lumens/watt) = 124 lm/W

COEFFICIENTS OF UTILIZATION

RC		8	0	
RW	70	50	30	10
RCR				
0	119	119	119	119
1	109	105	100	97
2	99	91	85	79
3	91	80	72	66
4	83	71	63	56
5	76	64	55	48
6	71	57	48	42
7	65	52	43	37
8	61	47	39	33
9	57	43	35	30
10	53	40	32	27

Note: Values expressed as % of total lumen output delivered to the task surface.





PROJECT: TYPE:

Dimming Compatibility

Amerlux® Carisma® fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (*Dimmer, Fixture Quantity, Voltage, etc.*) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---

0-10V - DIMMING (Standard)

Integrates into a variety of building management and daylighting controls

Notes:

- 120V or 277V*
- · Dims down to 1% light output
- · Requires interface to turn off power to driver
- Consult Dimming manufacturer for installation instructions DO NOT SHARE NEUTRALS!

0-10V Wiring Diagram Driver 0-10V ● 0-10V (-) Line Dimming Purple 0-10V (+) Control Black Ground Switched Hot White Neutral Green Ground Neutral

Compatible Dimmers†:				
Wall Box		Central System		
Lutron:	Wattstopper:	Leviton:	Lutron Grafixk Eye with GRX-TV1 Interface	
Diva - DVSTV	ADF-120277	Renoir II		
Maestro - MS-Z101				
Nova-T - NTSTV-DV				

LUTRON LDE1 DIMMING


Integrates into Lutron EcoSystem building management

Notes:

- 120VAC or 277VAC*
- Dims down to 1% Soft-On/Fade-to-Black
- EcoSystem Control
- Consult Dimming manufacturer for installation instructions - DO NOT SHARE NEUTRALS!

Compatible Dimmers [†] :			
Lutron ECO System	Central System		
Pow Pak Dimming Modules	Lutron EcoSystem compatible controls		
Energi Savr Node			
Grafik Eye QS/Homeworks			
QS Control Unit			
Quantum Hub			
Homeworks QS/My Room			

LDE1 (HILUME-H-ECO) EcoSystem Digital Control Wiring Diagram

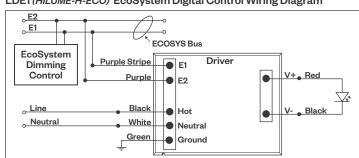

Notes:

- * Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.
- † The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.





PROJECT: TYPE:

Dimming Compatibility (continued)

Amerlux® Carisma® fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (*Dimmer, Fixture Quantity, Voltage, etc.*) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---

DALI - DALI DIMMING 120V-277V

Digital control protocol allows individual fixture control

Notes:


- 120VAC 277VAC*
- · Dims down to 1% light output in most cases

Compatible Dimmers†:				
Wall Box	Central System			
Leviton CD250 Controller	Dynalite			
	Fifth Light			

DALI Wiring Diagram DALI Bus DALI Bus DALI Bus Driver Control Purple/WT Driver V+ Red V- Black Neutral Green Ground

Emergency Fixture with Built-In Battery Pack

Emergency fixture with built-in battery pack (*EMB*) wiring: Note: *EMB* not available on lengths under 4'.

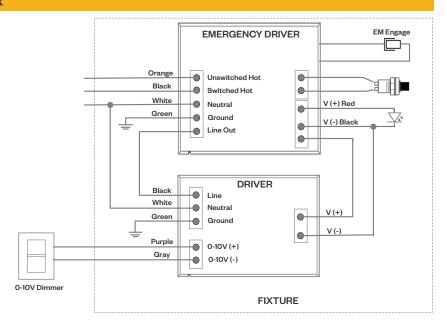

Notes:

- * Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.
- † The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.