

Carisma® Track

Linear Track Pendant



PROJECT:

TYPE:

Features

The Carisma® Track offers Global single circuit track cleanly installed in a 2" wide Carisma® housing.



CAR2-D-TRACK

Product Overview

Type: Global Single Circuit Track in 2" Carisma Housing

Circuiting: 1 circuit

Voltage: 120V

Amps: 20 Amps max.

Certifications



Fixture Summary

Runs

Individual Runs: 4' or 8' lengths.

Continuous Runs: > 8' (in 4' increments).



Delta Intelligent Building Technologies

Carisma® Track

Linear Track Pendant



PROJECT:

TYPE:

Ordering Information

CAR2-D-TRACK-GES 120

1

2

3

4

5

6

1	Model	2	Total Run Length	3	Mounting
	CAR2-D-TRACK-GES		(min. 4ft, increments of 4ft)		Pendant Mount (aircraft cable suspension) ASW04P through ceiling tile or gyp board, white, 4' (12/3) ASW10P through ceiling tile or gyp board, white, 10' (12/3) ASW20P through ceiling tile or gyp board, white, 20' (12/3) ASB04P through ceiling tile or gyp board, black, 4' (12/3) ASB10P through ceiling tile or gyp board, black, 10' (12/3) ASB20P through ceiling tile or gyp board, black, 20' (12/3)
4	Finish	5	Track Voltage	6	Configuration
	HW high reflectance matte white BT black texture ST silver texture <i>Note: Finish selection relates to bot track & housing.</i>		120		IND individual fixture, 4' or 8' length CON continuous run > 8'; in 4' increments

Specifications

Construction

Extruded aluminum housing with integrated 1 circuit GES track (*Track Heads sold separately*).

Die-cast end caps match fixture body finish.

Electrical

Single circuit, 120V, 20 amps max.

Finish

All painted surfaces are premium powder coated baked on for maximum durability and color stability.

HW - High reflective matte White

BT - Black Texture

ST - Silver Texture

Note: Finish selection relates to both track & housing.

Configurations/Lengths

IND - Individual fixtures are made of single standard lengths of 4ft or 8ft lengths. These are stand alone fixtures with matching End Caps, supplied with the mounting hardware.

CON - Continuous runs, > 8' specified to nearest whole foot length in 4' increments. Runs made from standard lengths have End Caps at the beginning and end of run. Runs > 60' may require second power feed. Each housing has factory installed alignment pins. Mating fixtures are easily aligned and joined. Wiring is made fast and positive with molded quick connectors.

Mounting

The Carisma® Track is intended for pendant mounting.

Pendant Mount-ASWxxP - pendant mounted in center of ceiling tile or gypsum board ceiling (*standard*) i.e. ASWxxP. All fittings are protected against rust and corrosion. Canopies are 5" x 1/4" die-formed painted steel. Adjustment mechanism allows for infinite height adjustment. Amerlux recommends the required feed and non-feed suspensions based upon length and electrical options. Options include: color of canopy and power cord (*black or white*), length 4', 10' or 20', and mounting condition, in center of ceiling tile and in gypsum board ceiling (*standard*) i.e. ASWxxP.

Certifications

Approved to UL standards for damp locations as tested by CSA

Intended for indoor use only

Warranty

Amerlux's 5 year limited warranty. Please consult Amerlux website for details.



Delta Intelligent Building Technologies

Carisma® Track



Linear Track Pendant



PROJECT:

TYPE:

Product Details

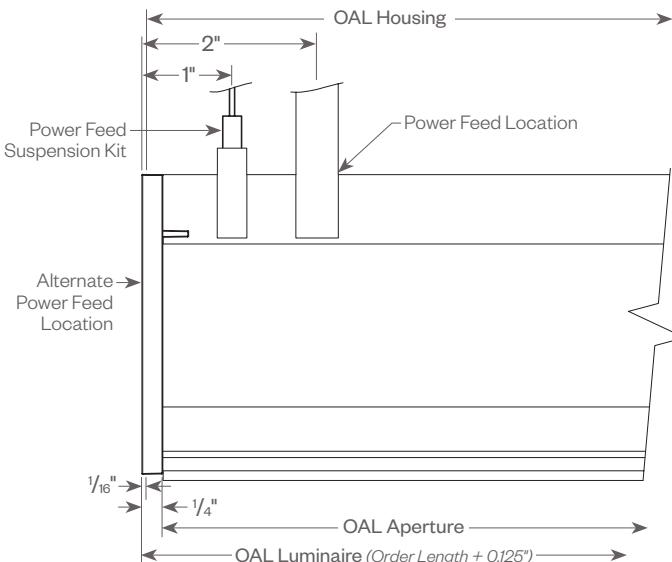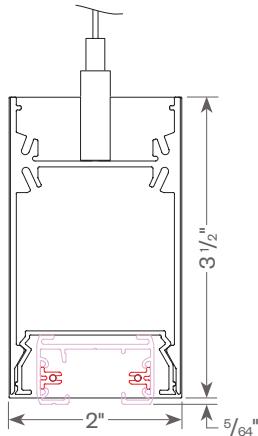


Tool-less Joining


Line up the two housings using the alignment brackets.

Secure them together by using the Catch & Latch

System on the top of the extrusion.

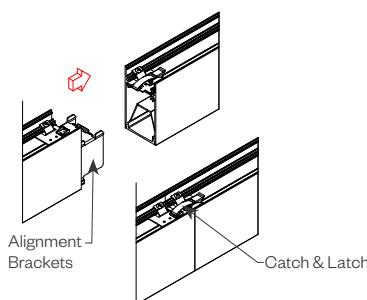

Cable Kit Suspension - Ceiling or Gypsum Board

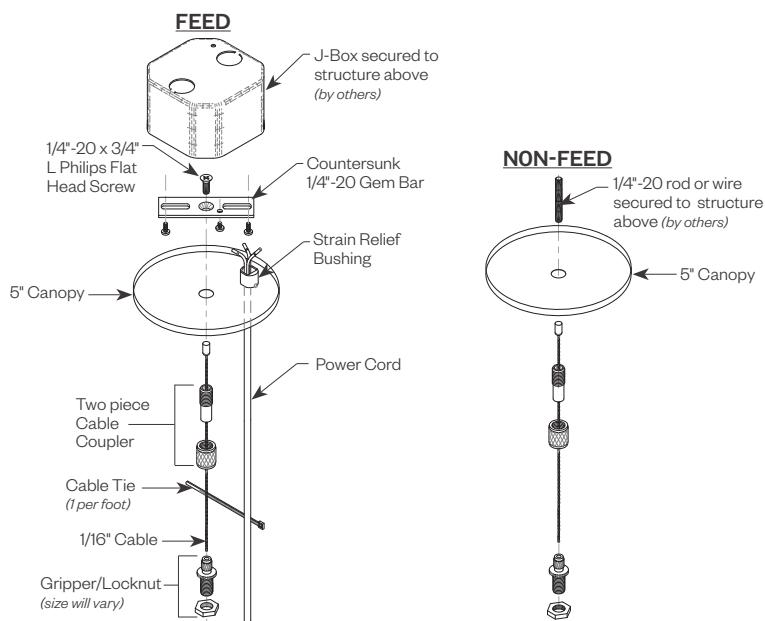

Cat#	Length	Cord/Canopy	Application
ASW04P	4'	white/white	ceiling tile/gypsum
ASW10P	10'	white/white	ceiling tile/gypsum
ASW20P	20'	white/white	ceiling tile/gypsum
ASB04P	4'	black/black	ceiling tile/gypsum
ASB10P	10'	black/black	ceiling tile/gypsum
ASB20P	20'	black/black	ceiling tile/gypsum



Delta Intelligent Building Technologies