

**INSTRUCTION
SHEET**




**INSTRUCTION SHEET, GRUV2.5 EOR
CUTTABLE W/ ADJUSTABLE COVE**

689-20056

PAGE 2 OF 3


WARNING - RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY. FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL SPECIFICATIONS. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.

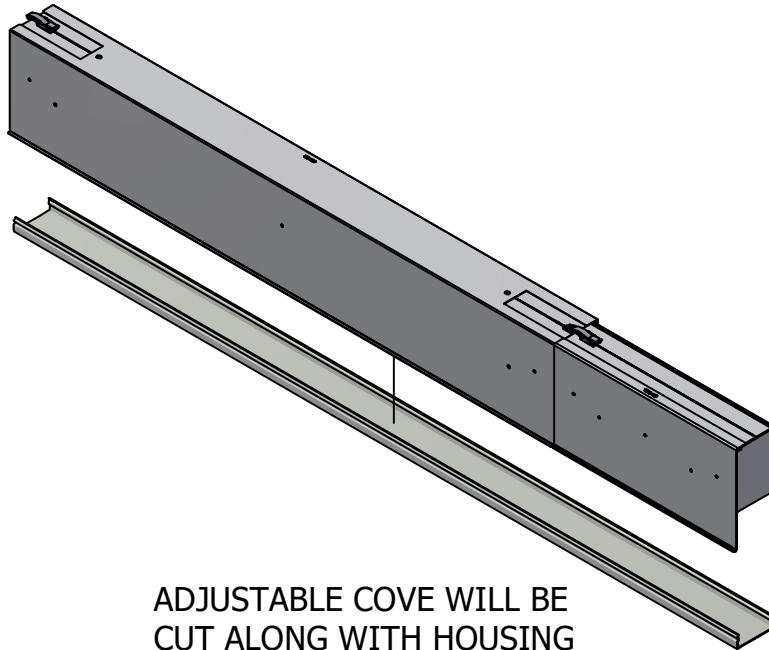

ADJUSTABLE COVE WILL BE
CUT ALONG WITH HOUSING

1. REMOVE LENS
2. DISCONNECT CUTTABLE SECTION
3. REMOVE ENDCAP
4. CUT SECTION ON ENDCAP SIDE (UP TO 6" REMOVED)
5. REATTACH ENDCAP
6. RECONNECT CUT SECTION
7. MOVE ADJUSTABLE REFLECTOR TO END & TIGHTEN SCREWS
8. CUT LENS DOWN TO SIZE (UP TO 6" REMOVED)
9. REPLACE CUT LENS

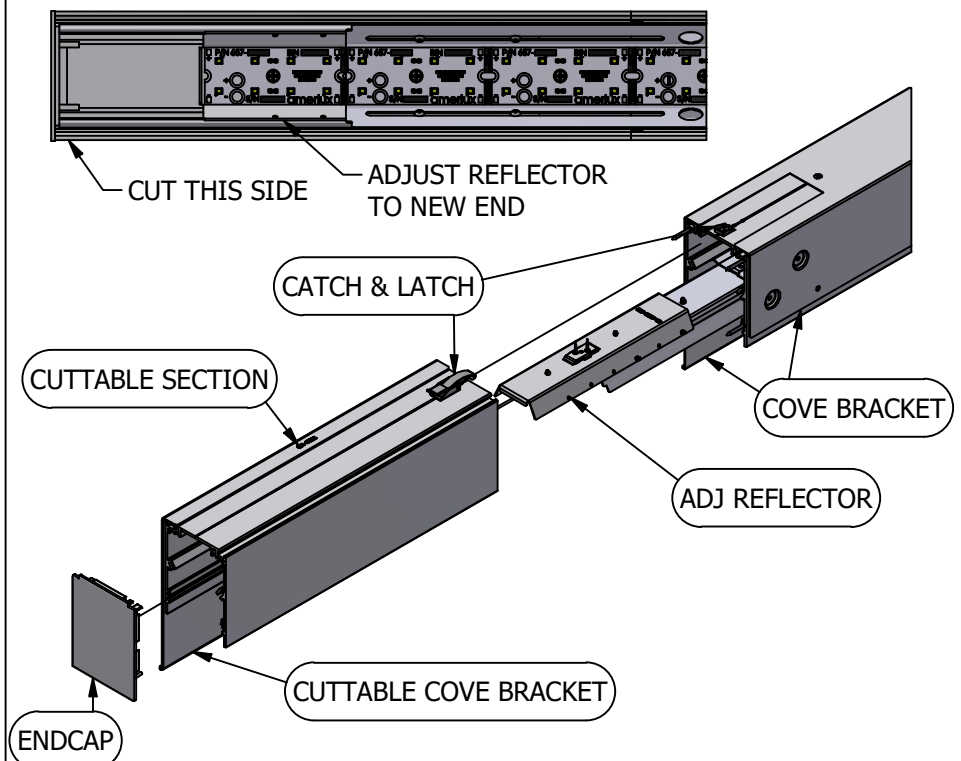

Amerlux, 178 Bauer Drive, Oakland, N.J. 07436, T: 973-882-5010, F: 973-882-2604 www.amerlux.com