

# ACION WALL MOUNTED LED LUMINAIRE

U.1.9.17

The Amerlux Acion luminaire employs solid state technology and precision engineering to provide small scale LED solutions in landscape and architecture layouts. All components are encapsulated inside a single attractive enclosure designed for superior performance in weather resistant applications. Offered in a choice of beam spreads, finishes, and color temperatures, and glare shield are also available.

## CONSTRUCTION:

- IP67 sealed optical chamber and integral driver chamber
- Easy "two-screw" integral driver access, does not disturb optical chamber seal
- Flush lens prevents puddles/water deposits in upward facing applications
- Knuckle mount
- Vertical aiming lock, with tamper-resistant tooled locking after final aiming

## OPTICS:

- Lumen maintenance: 70% @ 50,000 hours
- 10 ,15 ,30 ,40 ,60 ,60x10,60x30,90x60 beam spreads are available with secondary shaping lens
- **HGS** - Half external glare-shield field installable

## ELECTRICAL:


Integral driver  
Input voltage 120v-277v auto-sensing  
1/2" NPSM wire entry  
Drive current 700mA  
Power consumption 10W  
ELV dimmable at 120v only

## FINISH:

Premium quality thermoset polyester powdercoat for a durable finish in the following:


- BLK** -Satin Black                      **TBK** -Textured Black  
**CLB** -Classic Bronze                **WHT** -White  
**GRN** -Green                            **CSTM** -Custom

2WMACCS  
LED



PROJECT:

TYPE:

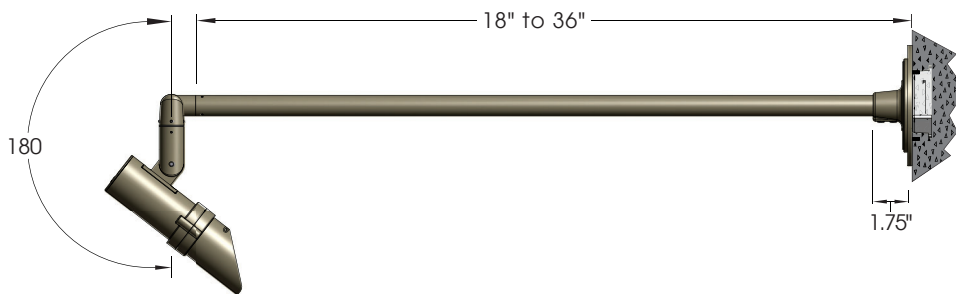

Model	CCT	Beam Spread	Approx. Lumens	Total Efficacy	Mounting	Finish	Accessories	Arm Length	
<b>2WMACCS</b>	<b>27</b> (2,700K) <b>30</b> (3,000K) <b>35</b> (3,500K)	Symmetric Pattern	<b>10</b> (10°)	1260-1420	63-71 lm/W	<b>K</b> (Knuckle)	<b>BLK</b> <b>CLB</b> <b>GRN</b> <b>TBK</b> <b>WHT</b>	<b>HGS</b> Glare Shield	<b>18"</b> <b>24"</b> <b>36"</b>
			<b>15</b> (15°)	1200-1360	60-68 lm/W				
			<b>30</b> (30°)	1140-1300	57-65 lm/W				
			<b>40</b> (40°)	1140-1300	57-65 lm/W				
			<b>60</b> (60°)	1080-1240	54-62 lm/W				
		Horizontal Pattern	<b>H6010</b> (60x10)	1260-1140	63-57 lm/W				
	<b>H6030</b> (60x30)		1140-1180	57-59 lm/W					
	<b>H9060</b> (90x60)		1160-1220	58-61 lm/W					
	Vertical Pattern	<b>V6010</b> (60x10)	1260-1140	63-57 lm/W					
		<b>V6030</b> (60x30)	1140-1180	57-59 lm/W					
		<b>V9060</b> (90x60)	1160-1220	58-61 lm/W					

Ordering options in **BOLD**



**5** year limited warranty  
AMERLUX LED



Part String

Example: **2WMACCS/30/K/BLK/36"**