


5" Direct Burial Series

U.10.23.17

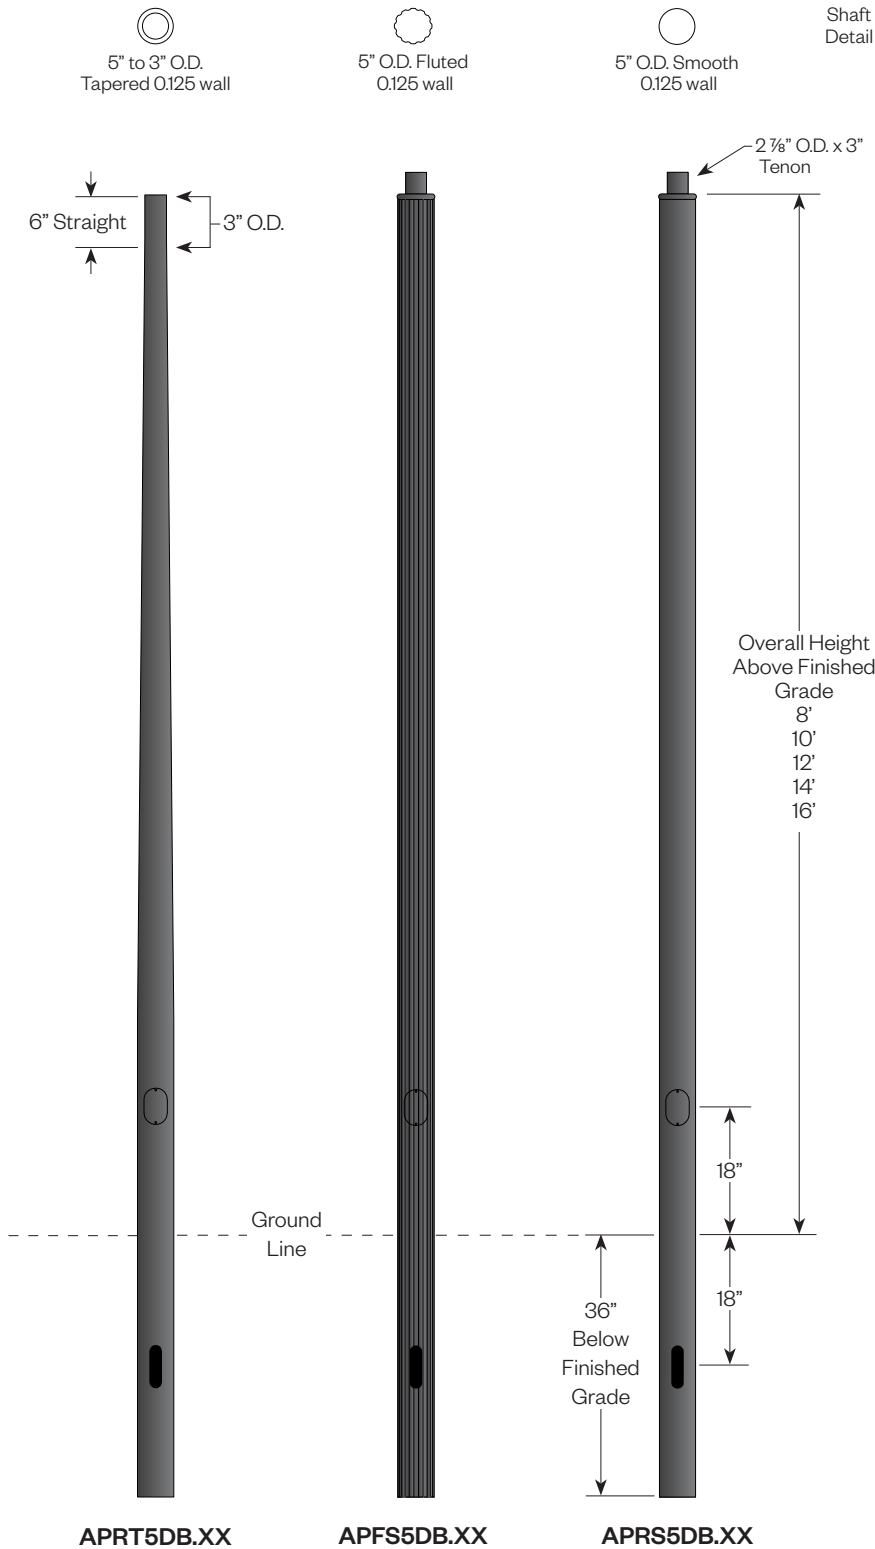

Features:

Choice of extruded shafts:

- 5" to 3" tapered, 0.125 wall
- 5" OD fluted (12 flutes), 0.125 wall
- 5" OD smooth round, 0.125 wall

A 2x4" handhole with curved lap style aluminum door and two stainless steel self-tapping screws is standard. A grounding provision incorporating a tapped 1/4" 20NC hole is provided opposite the handhole.

Materials:

Shaft - Extruded Aluminum (6063-T6)
- Tapered Aluminum (6063-T6)

Finish:

Premium quality thermoset polyester powdercoat for a durable finish.



Amerlux reserves the right to change details that do not affect overall function and performance.

5" Direct Burial Series

Pole Ordering Information

1

2

3

4

1 Model

APRT5DB - 5" to 3" O.D. pole, tapered 0.125 wall

APFS5DB - 5" O.D. fluted pole, 0.125 wall

APRS5DB - 5" O.D. smooth pole, 0.125 wall

2 Pole Height

08 - 8'-0"

10 - 10'-0"

12 - 12'-0"

14 - 14'-0"

16 - 16'-0"

3 Finish

BLK - satin black

CLB - classic bronze

GBZ - gloss textured bronze

GRN - green

GTB - gloss textured black

TBK - textured black

TGR - gloss textured green

CSTM - custom, consult factory

4 Options/Accessories

GFCI-TOP - ground fault circuit protected outlet, placed 6" from the top of pole

GFCI-BTM - ground fault circuit protected outlet, placed 6" above the decorative base at the bottom of the pole

LT - less tenon

Accessory Ordering Information (Ordered separately)

1

1 Model (all accessories below are for non-tapered shafts only)

BA18-FRC5 - 18" banner arm, 5" OD shaft

BA24-FRC5 - 24" banner arm, 5" OD shaft


2BA18-FRC5-180 - double sided 18" banner arms, 5" OD shaft

2BA24-FRC5-180 - double sided 24" banner arms, 5" OD shaft

FPH-5 - flag pole holder for 5" non-tapered poles

5-COV - two piece cover

5" Direct Burial Series

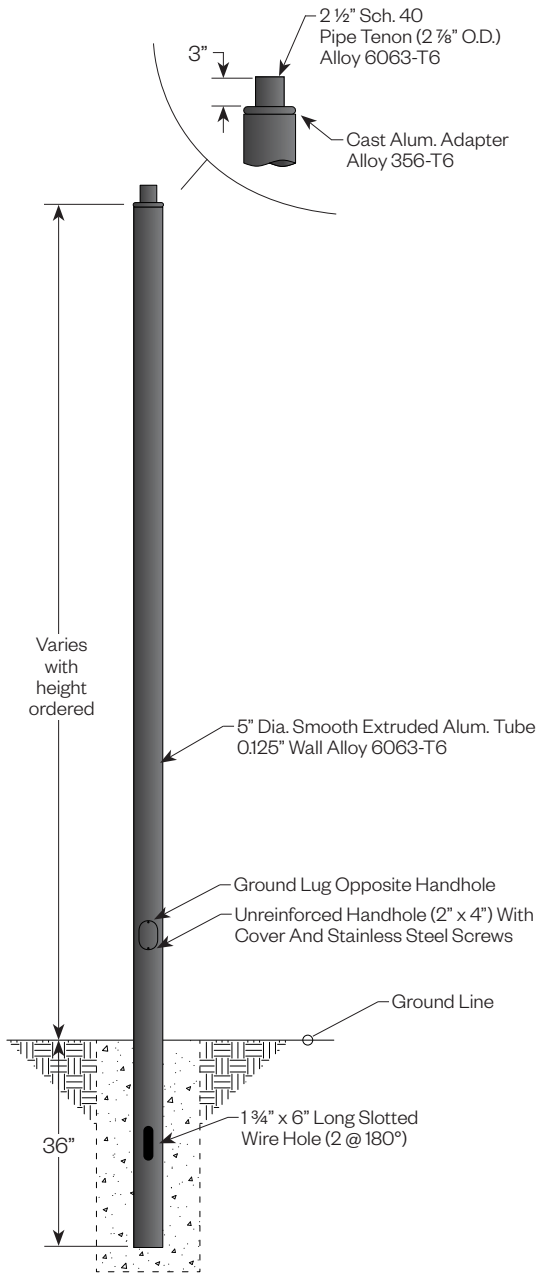

Finish

The post will be finished with an electrostatically applied thermoset polyester powder coat. Prior to finishing, the parts are thoroughly cleaned. Our powder coat finish is durable, long lasting, attractive and scratch resistant as well as environmentally friendly. We offer 7 stock finishes or hundreds of special order colors including custom matching for existing projects (additional charges apply).

- | | |
|------------------------------------|-----------------------------------|
| BLK - Satin Black | GTB - Gloss Textured Black |
| CLB - Classic Bronze | TBK - Textured Black |
| GBZ - Gloss Textured Bronze | TGR - Gloss Textured Green |
| GRN - Green | |

Accessories

Banner Arms

Single or double sided field rotatable banner arms.

BA18 (18") or **BA24** (24") banner arms

FRC5 (5"OD shaft)

Add a (2) for a double arm. Example: **2BA18-FRC5-180**

See ordering guide for configurations



FPH-5

Extruded aluminum holder for 1" OD flag poles.


Available for 5" OD non-tapered pole.



GFCI - Top/Bottom

Covered ground fault circuit protected duplex outlet.

Can be placed near top of pole or above the decorative base at the bottom of the pole. Wet while in use rated.



5 - Cover

Two piece cover is fabricated from stamped and formed aluminum.