

AP24 SERIES LED UTILITY LUMINAIRE

U.7.17.19

DESCRIPTION:

The AP24 Series consists of a decorative acorn combined with one of several styles of cast aluminum utility fitters. Powered by Amerlux's patented AVISTA® LED system with options for intensity, distribution and color.

INSTALLATION:

The luminaire will mount to a 3" OD post or tenon with 5/16" black oxide coated stainless steel set screws to ensure a solid connection. The diffuser will be held to the fitter by (4) 1/4-20" black oxide coated stainless steel captive set screws.

ELECTRICAL:

- Over voltage and short circuit protected driver
- Series connected 10kV/20kA surge protector
- Automatic AC incoming voltage sensing (120-277V)
- Over voltage and short circuit protection
- 0-10V dimming
- 3 pin twist lock receptacle included (photocell optional)
- Optional 7 pin twist lock receptacle available, consult factory

ETL listed, suitable for wet locations.

DIFFUSER CHOICES:

- Clear Textured Polycarbonate (**PC-CL**)
- White Textured Polycarbonate (**PC-WH**)
- Clear Textured DR Acrylic (**DR-CL**)

FINISH:

Durable thermoset polyester powdercoat finish in the following:

- Satin Black (**BLK**)
- Classic Bronze (**CLB**)
- Gloss Textured Bronze (**GBZ**)
- Green (**GRN**)
- Gloss Textured Black (**GTB**)
- Textured Black (**TBK**)
- Gloss Textured Green (**TGR**)

DISTRIBUTION:

- Symmetric (**SY**)
- Asymmetric (**AS**)
- Street Optic (**SO**)

LED Board Drive Current:

- 500ma (**500M**)
- 700ma (**700M**)
- 1200ma (**1200M**)

CCT:

- 2,700K (**27**)
- 3,000K (**30**)
- 4,000K (**40**)

L70:

50,000+

ACCESSORIES:

- Cast aluminum Finial (**CFIN**)
- Twistlock Photocell (**TW-PCL**)

AP24
LED UTILITY




PROJECT:

LOCATION:

FIXTURE TYPE:

NOTES:

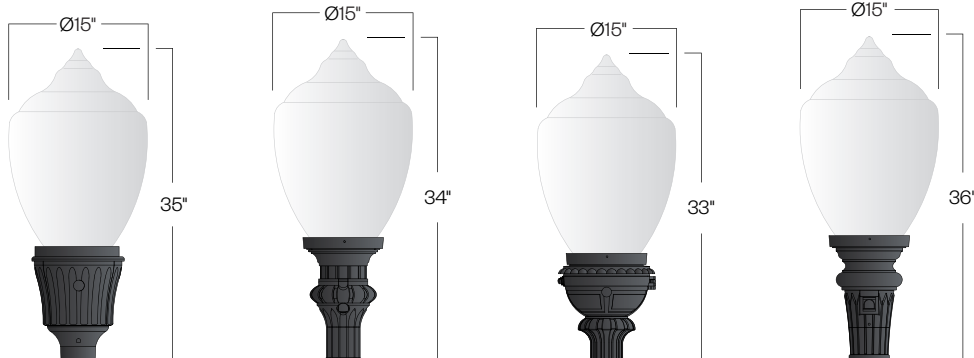

DUF1-AP24

DUF4-AP24

DUF34-AP24

DUF37-AP24



Electrostatic sensitive device.
observe precautions for handling

5 year limited
warranty
AMERLUX LED



AP24 SERIES LED UTILITY LUMINAIRE

AP24
LED UTILITY

Ordering Information



Add additional accessories as needed.

- 1** Model
DUF1-AP24
DUF4-AP24
DUF34-AP24
DUF37-AP24

- 2** Diffuser
Material-Color
PC-CL
PC-WH
DR-CL

- 3** LED System
AVI2 - Standard model

- 4** Light Distribution
SY - Symmetric
AS - Asymmetric
SO - Street Optic




- 5** CCT
27 - 2,700K
30 - 3,000K
40 - 4,000K

- 6** Drive Current
500M - 500mA
700M - 700mA
1200M - 1200mA

- 7** Finish
BLK - Satin Black
CLB - Classic Bronze
GBZ - Gloss Textured Bronze
GRN - Green
GTB - Gloss Textured Black
TBK - Textured Black
TGR - Gloss Textured Green
CSTM - Custom

- 8** Accessories
CFIN - Cast Aluminum Finial
TW-PCL - Dusk-to-dawn photocell

LED Options (**bold** indicates ordering code)


LED System	Driver Output	System Watts	Light Distribution	CCT	Engine Only Lumens	Engine Only LPW	DLC Globe Lumens	DLC Globes LPW
   AVI2	500M (500mA)	27W	SY (Symmetric)	27 (2,700K)	3,030 lm	112	2,270 lm	84
				30 (3,000K)	3,120 lm	116	2,880 lm	107
				40 (4,000K)	3,420 lm	126	3,150 lm	117
			AS (Asymmetric)	27 (2,700K)	2,910 lm	108	2,200 lm	81
				30 (3,000K)	3,000 lm	111	2,770 lm	103
				40 (4,000K)	3,140 lm	116	2,900 lm	107
			SO (Street Optic)	27 (2,700K)	2,980 lm	110	2,440 lm	82
				30 (3,000K)	3,060 lm	113	2,830 lm	105
				40 (4,000K)	3,220 lm	119	2,980 lm	110
	700M (700mA)	38W	SY	27 (2,700K)	4,120 lm	109	3,100 lm	81
				30 (3,000K)	4,240 lm	112	3,870 lm	103
				40 (4,000K)	4,640 lm	123	4,240 lm	112
			AS	27 (2,700K)	3,790 lm	100	2,990 lm	60
				30 (3,000K)	3,900 lm	103	3,610 lm	96
				40 (4,000K)	4,090 lm	108	3,780 lm	100
			SO	27 (2,700K)	4,010 lm	106	3,290 lm	86
				30 (3,000K)	4,130 lm	109	3,820 lm	101
				40 (4,000K)	4,330 lm	115	4,010 lm	106
	1200M (1200mA)	68W	SY	27 (2,700K)	6,110 lm	90	*	*
				30 (3,000K)	7,260 lm	107	6,720 lm	99
				40 (4,000K)	7,530 lm	111	6,970 lm	103
			AS	27 (2,700K)	5,690 lm	84	*	*
				30 (3,000K)	6,990 lm	103	6,470 lm	96
				40 (4,000K)	7,320 lm	108	6,770 lm	100
SO			27 (2,700K)	5,820 lm	86	*	*	
			30 (3,000K)	7,140 lm	106	6,610 lm	98	
			40 (4,000K)	7,500 lm	111	6,940 lm	103	

Approximate lumens delivered from raw light engine.


*These models are not DLC listed.

Photometry

AP24PC-CL-AVI2-700M-SY-27

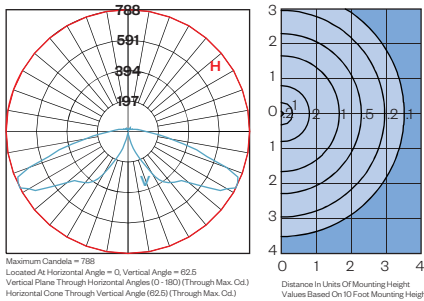

AP24PC-CL/AVI2-700MA-SO-27

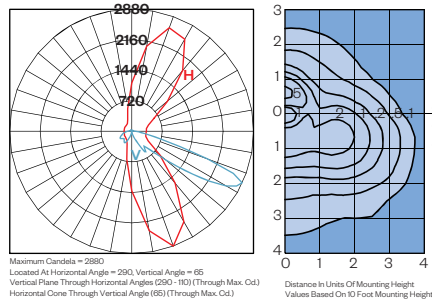

AP24PC-CL/AVI2-700M-AS-27

