

# LED FLAT TOP BOLLARD

U.8.14.19

**Model:**  
**AXB7F**

**Housing:**  
Extruded aluminum housing with flush mounting base & vandal-resistant screws, flat top, powdercoat finish over a chromate conversion coating, internal driver tray for easy maintenance.

**Reflector:**  
Specially designed aluminum cone reflector for LED.

**Mounting:**  
Mounting kit with 8" anchor bolts (included).

**LED System:**  
1,450 lm (4K)  
1,510 lm (5K)  
CRI: 83  
CCT: 3000K, 4000K, 5000K  
Aluminum LED Board

**Lens:**  
Clear polycarbonate lens

**Wattage:**  
17W

**Listing & Ratings:**  
CSA: Listed for wet locations. IP65  
Operating Temperatures: -40°C to +40°C

**Driver:**  
Electronic Driver, 120-277V, 50/60Hz  
0-10v Dimmable Driver

- Options:**
- Surge Protection (**SP**)
  - Custom colors available upon request.
  - Bollards can be cut to custom heights upon request.
  - 180° Glare Shield option, finish matches fixture finish (**GS**)

**Finish:**  
**Z** (Bronze)  
**B** (Black)  
**C** (Custom)



**AXB7F**  
LED




PROJECT:

TYPE:

**AXB7F / 5K**

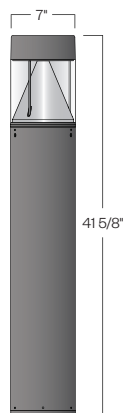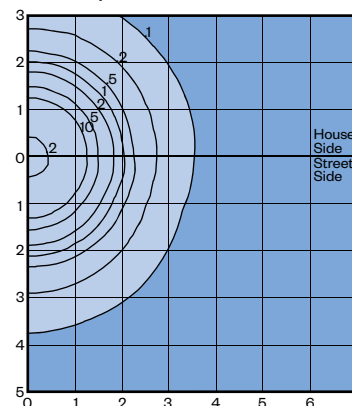

Anchor Bolts



Ordering Information

Model	Light Distribution	Code	CCT	Nominal Input Power	Finish	Option
<b>AXB7F</b>	Medium Beam Spread	<b>3K</b>	3,000K	17W	<b>B</b> <b>Z</b> <b>C</b>	<b>SP</b>
		<b>4K</b>	4,000K			<b>GS</b>
		<b>5K</b>	5,000K			

Ordering options in **BOLD**

**5** year limited warranty  
AMERLUX LED



Part String

Example: **AXB7F / 4K / B**

Amerlux reserves the right to change details that do not affect overall function and performance.

